

Report No.: T190816W02-RP6

Page 1 of 64

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND INDUSTRY CANADA RSS 247 REQUIREMENT

OF

Applicant: Quanta Computer Inc.

No. 188, Wenhua 2nd Road, Guishan District, Taoyuan City

33377, Taiwan

Product Name: Clover Flex

Brand Name: clover Model No.: C403 Model Difference: N/A

 FCC ID:
 HFS-C403U

 IC:
 1787B-C403U

 Report Number:
 T190816W02-RP6

 FCC Rule Part:
 §15.247, Cat: DTS

IC Rule Part: RSS-247 issue 2 Feb 2017

Issue Date: Sep. 09, 2019

Date of Test: Aug. 16, 2019 ~ Aug. 23, 2019

Date of EUT Received: Aug. 16, 2019

Issued by Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891,

Taiwan. (R.O.C.) service@ccsrf.com

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report. The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Hone Hsieh / Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 2 of 64



Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190816W02-RP6	Rev.00	Initial creation of document	All	Aug. 30, 2019	Elle Chang
T190816W02-RP6	Rev.01	Update the information	8	Sep. 09, 2019	Elle Chang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Table of Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	.11
6	CONDUCTED EMISSION TEST	.12
7	PEAK OUTPUT POWER MEASUREMENT	.16
8	6dB & 99% BANDWIDTH MEASUREMENT	.22
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	.26
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	.32
11	PEAK POWER SPECTRAL DENSITY	.61
12	ANTENNA REQUIREMENT	.64

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

Page 4 of 64



GENERAL INFORMATION

1.1 Product Description

Product Name:	Clover Fle	ex	
Brand Name:	clover		
Model No.:	C403		
Model Difference:	N/A		
Product SW/HW version:	N/A / N/A		
Radio SW/HW version:	N/A / N/A		
Test SW Version:	N/A		
RF power setting in TEST SW:	/: N/A		
Micro Hub:	Model No.: H400, Supplier: clover		
Docking:	Model No.: K400, Supplier: clover		
	7.6V from Li-ion Polymer rechargeable battery or 12V from Adapter		
Power Supply:	Battery:	Model No.: CA355772HV_POS5, Supplier: CosMX Battery Co., Ltd.	
	Adapter:	Model No.: FSP040-RHBN3, Supplier: FSP	

Bluetooth Low Energy:

Bluetooth Version:	Bluetooth V5.0 Dual Mode	
Channel number:	40 channels	
Modulation type:	GFSK	
Transmit Power:	1.52dBm (BLE 1M) 1.67dBm (BLE 2M)	
Frequency Range:	2402 – 2480MHz	
Antenna Designation:	PIFA Antenna, Peak Gain: -1.47dBi P/N: DQ60AYF0002, Supplier: SAA	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Report No.: T190816W02-RP6

Page 5 of 64

1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance v05.

RSS-Gen. issue 5 Apr. 2018

RSS-247 issue 2 Feb. 2017

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

Canada Registration Number: 2324G

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。



SGS

Page 6 of 64

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207 & RSS-Gen §8.8. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

Page 7 of 64



2.5 Configuration of Tested System

Fig. 2-1 Radiated Emission Configuration



Fig. 2-2 Conducted Emission Configuration

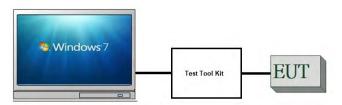


Fig 2-3 Conduction (AC Power Line)

Configuration

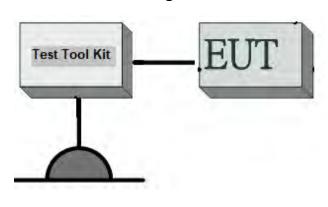


Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Ca- ble	Power Cord
1	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2	Notebook	Lenovo	T420	S0012483	Shielded	Unshielded
3	Test Tool Kit	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 8 of 64



SUMMARY OF TEST RESULTS

FCC Rules	IC Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	RSS-247 §5.4(4)	Peak Output Power	Compliant
§15.247(a)(2)	RSS-247 §5.2 (1) RSS-Gen §6.7	6dB & 99% Emission Bandwidth	Compliant
§15.247(d)	RSS-247 §5.5	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	RSS-247 §5.5	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	RSS-247 §5.2(2)	Peak Power Density	Compliant
§15.203 §15.247(b)	RSS- Gen §6.8	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




4 DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

40 channels are provided for Bluetooth LE

ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
1	2402 MHz	15	2430 MHz	29	2458 MHz
2	2404 MHz	16	2432 MHz	30	2460 MHz
3	2406 MHz	17	2434 MHz	31	2462 MHz
4	2408 MHz	18	2436 MHz	32	2464 MHz
5	2410 MHz	19	2438 MHz	33	2466 MHz
6	2412 MHz	20	2440 MHz	34	2468 MHz
7	2414 MHz	21	2442 MHz	35	2470 MHz
8	2416MHz	22	2444 MHz	36	2472 MHz
9	2418 MHz	23	2446 MHz	37	2474 MHz
10	2420 MHz	24	2448 MHz	38	2476 MHz
11	2422 MHz	25	2450 MHz	39	2478 MHz
12	2424 MHz	26	2452 MHz	40	2480 MHz
13	2426 MHz	27	2454 MHz		
14	2428 MHz	28	2456 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

AC POWER LINE CONDUCTED EMISSION TEST:

Test Condition	AC Power line conducted emission for line and neutral	
Worst Case	Operation in normal mode	

RADIATED EMISSION TEST:

MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	DATA RATE (Mbps)		
	RADIATED EMISSION TEST (BELOW 1 GHz)					
Bluetooth LE	2402 to 2480	2442	GFSK	1		
Bluetooth LE	2402 to 2480	2442	GFSK	2		
	RADIATED EMISSION TEST (ABOVE 1 GHz)					
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	1		
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	2		

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case H position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

	CONDUCTED TEST					
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	DATA RATE (Mbps)		
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	1		
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



5 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Peak Output Power	+/- 1.92 dB
6dB Bandwidth	+/- 61.248 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.92 dB
Peak Power Density	+/- 1.996 dB
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



6 CONDUCTED EMISSION TEST

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak Average			
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note

6.2 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
CABLE	EMCI	CFD300-NL	CERF	06/27/2019	06/26/2020		
EMI Test Receiver	R&S	ESCI	101203	10/29/2018	10/28/2019		
LISN	SCHWARZBECK	NSLK 8127	8127-541	01/31/2019	01/30/2020		
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020		
Software	EZ-EMC(CCS-3A1-CE)						

6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

^{1.} The lower limit shall apply at the transition frequencies

^{2.}The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.



6.4 Test SET-UP (Block Diagram of Configuration)

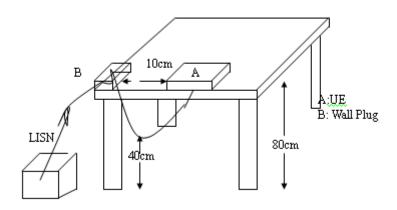

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page 14 of 64



AC POWER LINE CONDUCTED EMISSION TEST DATA

Description: Operation Date: 2019/8/23 Line: L1 Temp.($^{\circ}$)/Hum.($^{\circ}$): 25.3($^{\circ}$)/65%

Test Voltage: AC 120V/60Hz Test By: Henry Job No.: T190816W02

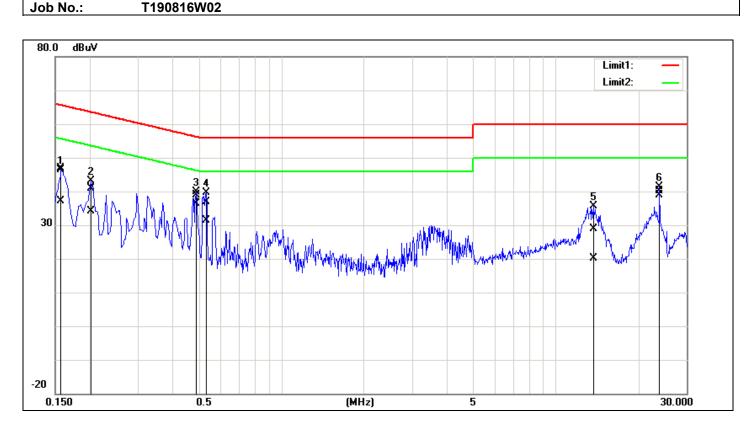

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1580	36.66	26.98	10.14	46.80	37.12	65.56	55.57	-18.76	-18.45	Pass
2	0.2020	30.87	24.06	10.13	41.00	34.19	63.52	53.53	-22.52	-19.34	Pass
3*	0.4900	28.72	26.23	10.14	38.86	36.37	56.17	46.17	-17.31	-9.80	Pass
4	0.5340	26.84	21.35	10.14	36.98	31.49	56.00	46.00	-19.02	-14.51	Pass
5	13.7220	18.52	9.83	10.36	28.88	20.19	60.00	50.00	-31.12	-29.81	Pass
6	23.9260	29.76	28.49	10.28	40.04	38.77	60.00	50.00	-19.96	-11.23	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





Description: Operation Date: 2019/8/23 Line: N Temp.($^{\circ}$)/Hum.($^{\circ}$): 25.3($^{\circ}$)/65%

Test Voltage: AC 120V/60Hz Test By: Henry

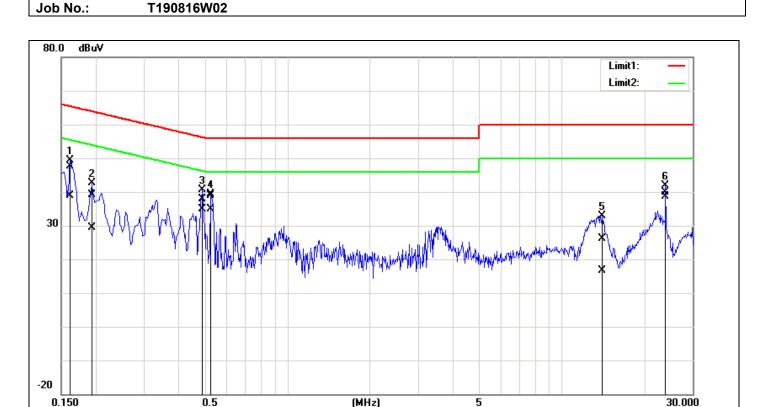

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1620	37.63	28.97	10.02	47.65	38.99	65.36	55.36	-17.71	-16.37	Pass
2	0.1940	29.16	19.40	10.02	39.18	29.42	63.86	53.86	-24.68	-24.44	Pass
3	0.4900	27.79	24.84	10.03	37.82	34.87	56.17	46.17	-18.35	-11.30	Pass
4*	0.5265	28.73	24.78	10.03	38.76	34.81	56.00	46.00	-17.24	-11.19	Pass
5	14.0900	15.91	6.33	10.25	26.16	16.58	60.00	50.00	-33.84	-33.42	Pass
6	23.9260	29.51	28.36	10.36	39.87	38.72	60.00	50.00	-20.13	-11.28	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



7 PEAK OUTPUT POWER MEASUREMENT

7.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.


7.2 Measurement Equipment Used:

	Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
Power Meter	Anritsu	ML2496A	1242004	10/23/2018	10/22/2019				
Power Sensor	Anritsu	MA2411B	1207365	10/23/2018	10/22/2019				
Power Sensor	Anritsu	MA2411B	1207368	10/24/2018	10/23/2019				
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020				
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019				

7.3 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





7.4 Measurement Procedure:

- 1.Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas Guidance & ANSI C63.10...
- 3.Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

- 4. Record the max. Reading as observed from Power Meter.
- 5. Repeat above procedures until all test default channel measured was complete.

Formula:

Duty Cycle = Ton / (Ton+Toff)

Duty Factor:

Please refer to next page.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



(BLE 1M)

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
BLE	62.30	2.06	2.56	3.00

Duty Cycle_BLE_1M_MidCH20-2442

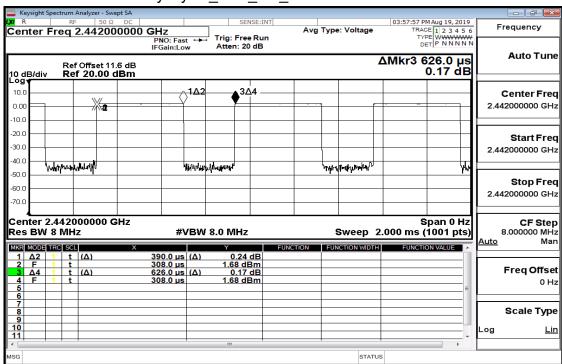

Duty Cycle Factor:10*log(1/(62.3/100))=2.06

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


程智科技股份有限公司



(BLE 2M):

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
BLE 2M	32.69	4.86	4.90	5.00

Duty Cycle_BLE_2M_ MidCH20-2442

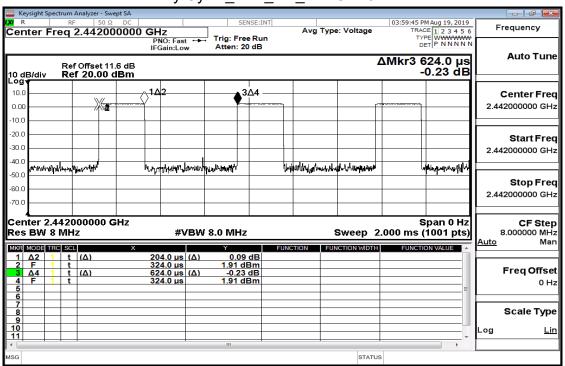

Duty Cycle Factor:10*log(1/(32.69/100))=4.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



7.5 Measurement Result:

(BLE 1M)

<u> </u>			
СН	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
Low	2402	1.01	1 Watt = 30 dBm
Mid	2442	0.98	1 Watt = 30 dBm
High	2480	1.52	1 Watt = 30 dBm
СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit
Low	2402	0.81	1 Watt = 30 dBm
Mid	2442	0.77	1 Watt = 30 dBm
High	2480	1.20	1 Watt = 30 dBm

^{*}Note: Measured by power meter, cable loss as 12.6 dB that offsets on the power meter in Peak *Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter

EIRP

СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	L	.imi	it
Low	2402	0.81	-1.47	-0.66	4W=	36	dBm
Mid	2442	0.77	-1.47	-0.70	4W=	36	dBm
High	2480	1.20	-1.47	-0.27	4W=	36	dBm

^{*} Note: EIRP = Average Power + Gain

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

^{*}Note: Max. Output include tune up tolerance Power is average power



(BLE 2M)

СН	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
Low	2402	1.10	1 Watt = 30 dBm
Mid	2442	1.18	1 Watt = 30 dBm
High	2480	1.67	1 Watt = 30 dBm
СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit
CH Low		tune up tolerance Power	Required Limit 1 Watt = 30 dBm
	(MHz)	tune up tolerance Power (dBm)	

*Note: Measured by power meter, cable loss as 12.6 dB that offsets on the power meter in Peak *Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power

*Note: Max. Output include tune up tolerance Power is average power

EIRP

СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	L	.imi	it
Low	2402	0.66	-1.47	-0.81	4W=	36	dBm
Mid	2442	0.75	-1.47	-0.72	4W=	36	dBm
High	2480	1.22	-1.47	-0.25	4W=	36	dBm

* Note: EIRP = Average Power + Gain

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

Page 22 of 64



8 6DB & 99% BANDWIDTH MEASUREMENT

8.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT MFR MODEL SERIAL LAST CAL DUE NUMBER NUMBER CAL.							
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020		
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019		

8.3 Test Set-up:



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:

Set the spectrum analyzer as RBW=100 kHz, VBW= 3*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.

- 5. Mark the peak frequency and -6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:

Set the spectrum analyzer as RBW=1%, VBW=3*RBW, Span = 2MHz, Detector=Sample, Sweep=auto.

- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



8.5 Measurement Result:

BLE 1M mode

Frequency (MHz)	6dB BW (MHz)	BW (MHz)	Result
2402	0.6854	> 0.5	PASS
2442	0.6896	> 0.5	PASS
2480	0.6864	> 0.5	PASS

BLE 1M mode

Frequency (MHz)	99%Bandwidth (MHz)
2402	1.0282
2442	1.0303
2480	1.0305

BLE 2M mode


Frequency (MHz)	6dB BW (MHz)	BW (MHz)	Result
2402	1.158	> 0.5	PASS
2442	1.165	> 0.5	PASS
2480	1.164	> 0.5	PASS

BLE 2M mode

Frequency (MHz)	99%Bandwidth (MHz)
2402	2.0364
2442	2.0363
2480	2.0365


Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。







OBW 6dB_BLE_1M_LowCH00-2402

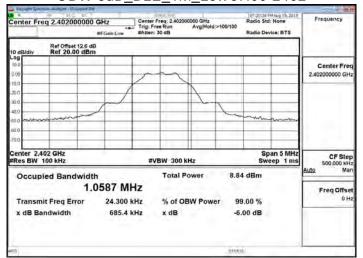


OBW 6dB BLE 1M MidCH20-2442

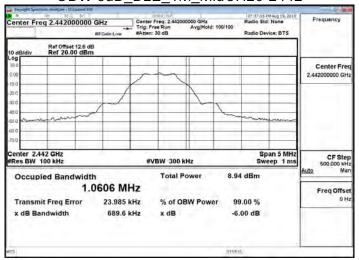


OBW 6dB_BLE_1M_HighCH39-2480

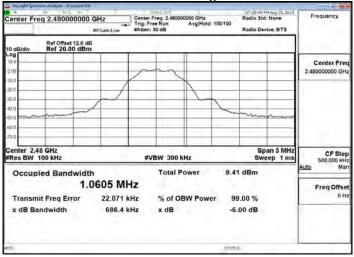


IC OBW 99%_BLE_1M_LowCH00-2402

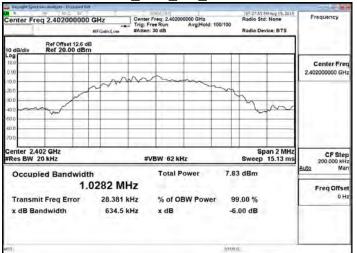

IC OBW 99% BLE 1M MidCH20-2442

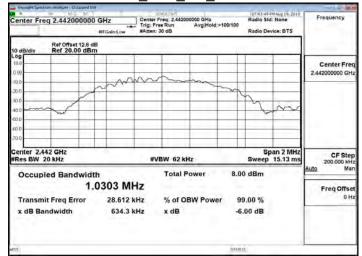


IC OBW 99% BLE 1M HighCH39-2480

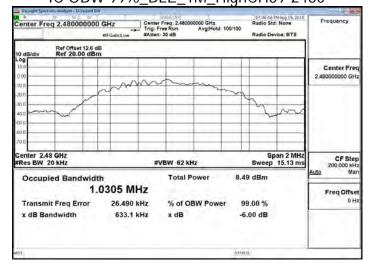


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



SGS


OBW 6dB_BLE_2M_LowCH00-2402

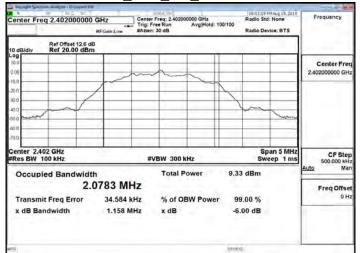


OBW 6dB BLE 2M MidCH20-2442




OBW 6dB_BLE_2M_HighCH39-2480

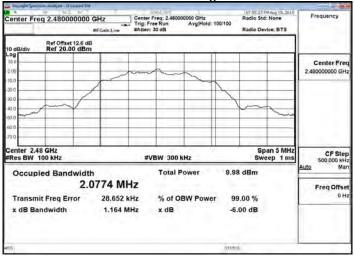


IC OBW 99%_BLE_2M_LowCH00-2402

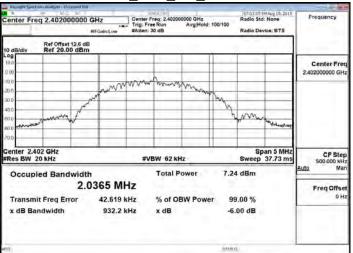

IC OBW 99% BLE 2M MidCH20-2442

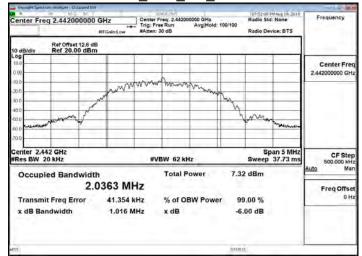

IC OBW 99% BLE 2M HighCH39-2480

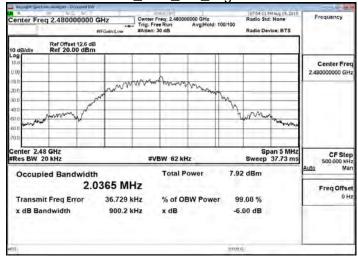

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

程智科技股份有限公司

Page 26 of 64



9 CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT

9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) & RSS-Gen §8.10, must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.8.

9.2 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019

9.3 Test SET-UP:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。



Page 27 of 64



9.4 Measurement Procedure

Reference Level of Emission Limit:


- Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

Conducted Band Edge:

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。





Conducted Spurious Emission:

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set RBW = 100 kHz & VBW=300 kHz, Detector = Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

9.5 Measurement Result

(BLE 1M)

Reference Level of Limit

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
2402	2.01	-17.99
2442	2.04	-17.96
2480	2.57	-17.43

NOTE: cable loss as 12.6dB that offsets in the spectrum

NOTE: Refer to next page for plots.

(BLE 2M)


Reference Level of Limit

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
2402	2.08	-17.92
2442	2.05	-17.95
2480	2.70	-17.30

NOTE: cable loss as 12.6dB that offsets in the spectrum


NOTE: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。




SGS


Reference Level_BLE_1M_LowCH00-2402

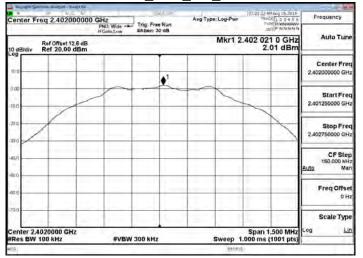


Reference Level BLE 1M MidCH20-2442

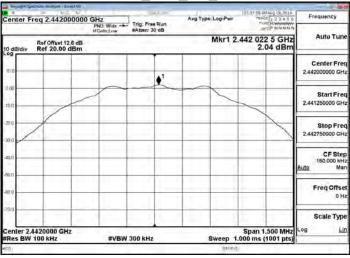


Reference Level_BLE_1M_HighCH39-2480

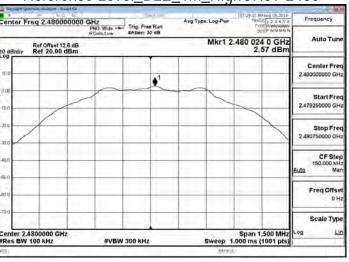


Reference Level_BLE_2M_LowCH00-2402

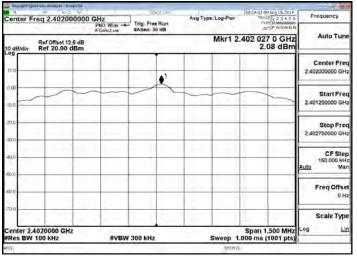

Reference Level BLE 2M MidCH20-2442

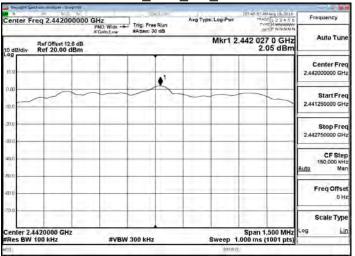

Reference Level_BLE_2M_HighCH39-2480

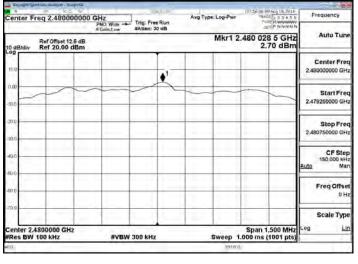


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Band Edge_BLE_1M_LowCH00-2402

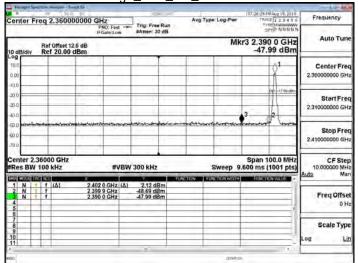


Band Edge_BLE_1M_HighCH39-2480

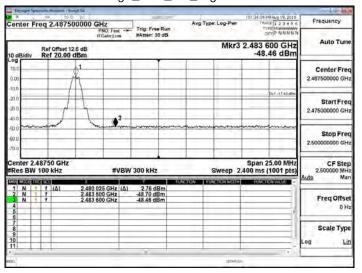

Band Edge_BLE_2M_LowCH00-2402

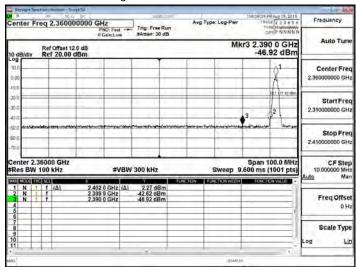


Band Edge_BLE_2M_HighCH39-2480

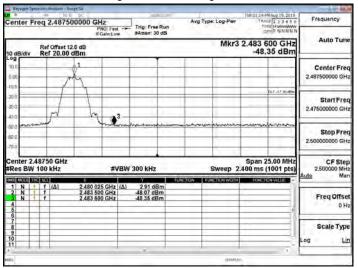


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。







Spurious Emission _BLE_1M_LowCH00-2402

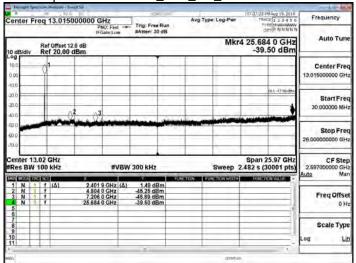


Spurious Emission _BLE_1M_MidCH20-2442

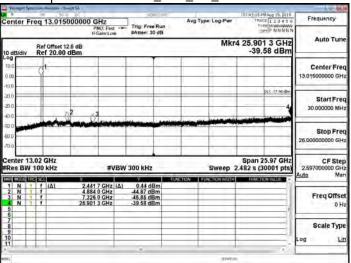


Spurious Emission _BLE_1M_HighCH39-2480

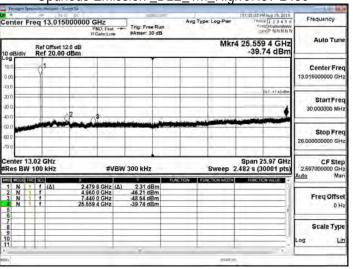


Spurious Emission _BLE_2M_LowCH00-2402

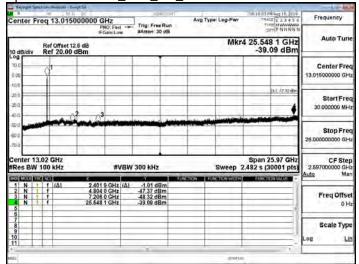

Spurious Emission _BLE_2M_MidCH20-2442

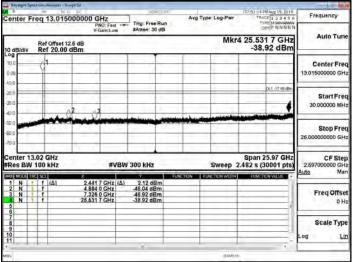

Spurious Emission _BLE_2M_HighCH39-2480

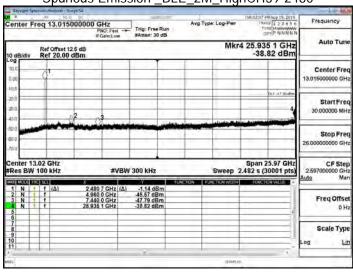

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page 32 of 64



10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 & RSS-Gen §8.8, 8.9 limit as below.

And according to §15.33(a) (1) & RSS-Gen §6.13(a), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Measurement Equipment Used 10.2


966A Chamber					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Low Pass Filter	EWT	EWT-56-0019	RF46	02/26/2019	02/25/2020
High Pass Filter	R&S	F13 HPF 3GHz	RF64	02/26/2019	02/25/2020
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020
Bilog Antenna	Sunol Sciences	JB3	A030105	07/26/2019	07/25/2020
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020
Loop Antenna	COM-POWER	AL-130	121051	03/22/2019	03/21/2020
Horn Antenna	SCHWARZBECK	BBHA 9120D	779	03/09/2019	03/08/2020
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/29/2019	05/28/2020
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 V6.11-20180413				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

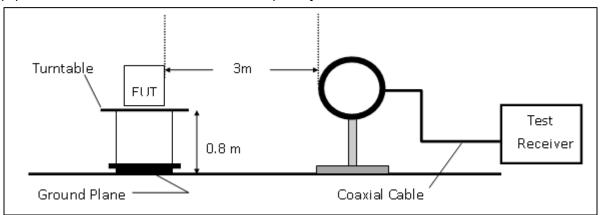

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

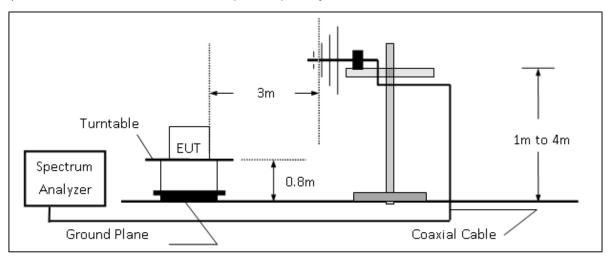

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

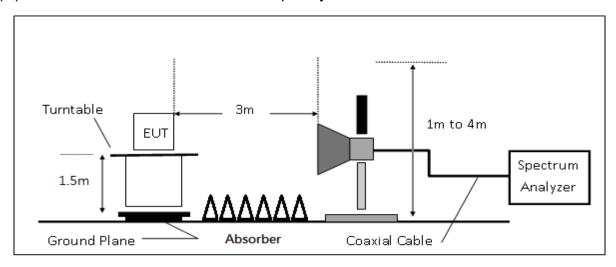

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



SGS

10.4 Measurement Procedure

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。



10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	3	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 37 of 64



Radiated Band Edge Measurement Result

(BLE 1M)


Report Number :T190816W02 Test Date :2019-08-22

Operation Band :BLE 1M Temp./Humi. :23.5/61

Frequency :2402 MHz Antenna Pol. :VERTICAL

Operation Mode :BE CH LOW Engineer :Kailin


EUT Pol. :H Plan

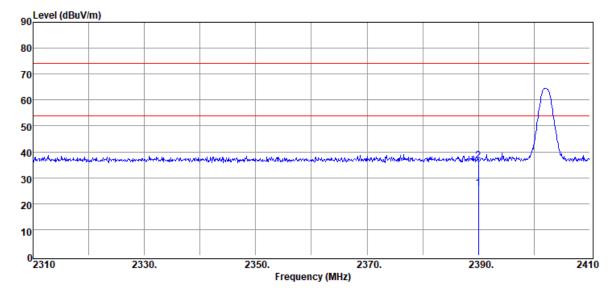

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
2390.00	Average	29.26	-3.38	25.88	54.00	-28.12
2390.00	Peak	39.87	-3.38	36.49	74.00	-37.51

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :BLE 1M Temp./Humi. :23.5/61

Frequency :2402 MHz Antenna Pol. :HORIZONTAL

Operation Mode :BE CH LOW Engineer :Kailin


EUT Pol. :H Plan

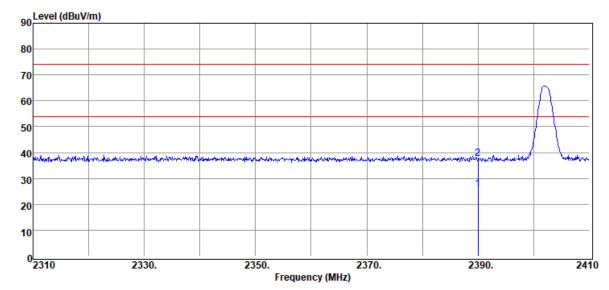

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	29.21	-3.38	25.83	54.00	-28.17
2390.00	Peak	41.00	-3.38	37.62	74.00	-36.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :BLE 1M Temp./Humi. :23.5/61

Frequency :2480 MHz Antenna Pol. :VERTICAL

Operation Mode :BE CH HIGH Engineer :Kailin


EUT Pol. :H Plan

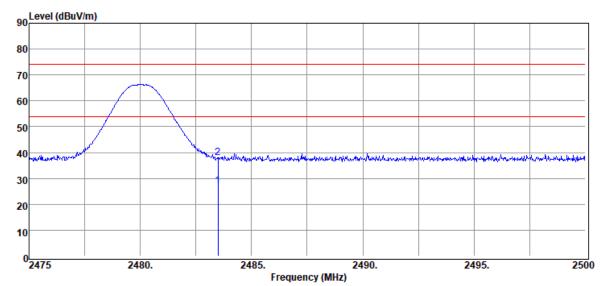

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
2483.50	Average	30.06	-2.83	27.23	54.00	-26.77
2483.50	Peak	40.68	-2.83	37.85	74.00	-36.15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :BLE 1M Temp./Humi. :23.5/61

Frequency :2480 MHz Antenna Pol. :HORIZONTAL

Operation Mode :BE CH HIGH Engineer :Kailin


EUT Pol. :H Plan

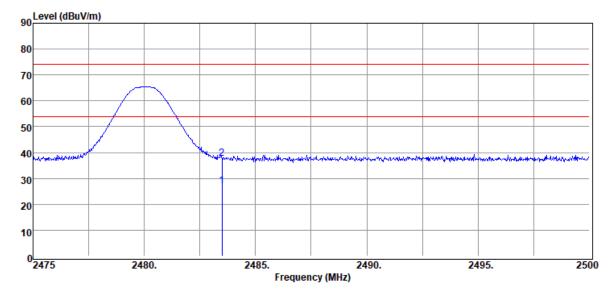

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	29.90	-2.83	27.07	54.00	-26.93
2483.50	Peak	40.45	-2.83	37.62	74.00	-36.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





(BLE 2M)


Report Number :T190816W02 Test Date :2019-08-22

Operation Band :BLE 2M Temp./Humi. :23.1/65

Frequency :2402 MHz Antenna Pol. :VERTICAL


Operation Mode :BE CH LOW Engineer :Kailin

EUT Pol. :H Plan

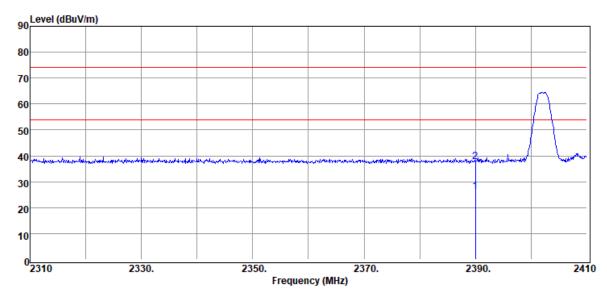

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
2390.00	Average	29.47	-3.38	26.09	54.00	-27.91
2390.00	Peak	41.19	-3.38	37.81	74.00	-36.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :BLE 2M Temp./Humi. :23.1/65

Frequency :2402 MHz Antenna Pol. :HORIZONTAL

Operation Mode :BE CH LOW Engineer :Kailin

EUT Pol. :H Plan

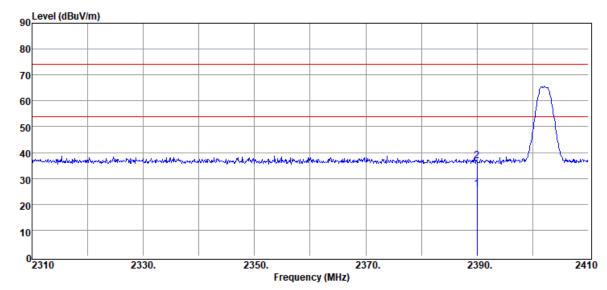


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	29.10	-3.38	25.72	54.00	-28.28
2390.00	Peak	40.17	-3.38	36.79	74.00	-37.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

程智科技股份有限公司






Operation Band :BLE 2M Temp./Humi. :23.5/71

Frequency :2480 MHz Antenna Pol. :VERTICAL

Operation Mode :BE CH HIGH Engineer :Kailin


EUT Pol. :H Plan

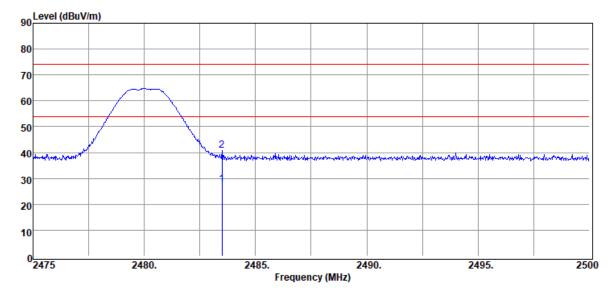

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	30.50	-2.83	27.67	54.00	-26.33
2483.50	Peak	43.56	-2.83	40.73	74.00	-33.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :BLE 2M Temp./Humi. :23.5/71

Frequency :2480 MHz Antenna Pol. :HORIZONTAL

Operation Mode :BE CH HIGH Engineer :Kailin

EUT Pol. :H Plan

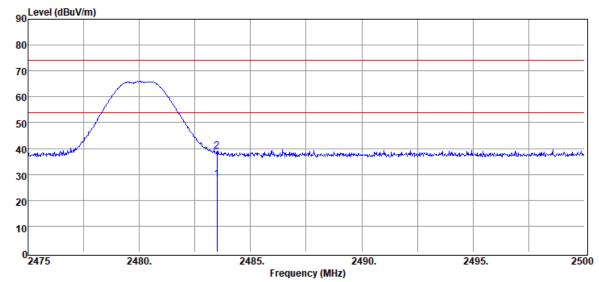

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	30.76	-2.83	27.93	54.00	-26.07
2483.50	Peak	41.76	-2.83	38.93	74.00	-35.07

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 45 of 64



Radiated Spurious Emission Measurement Result For Frequency form 30MHz to 1000MHz (BLE 1M)


Report Number :T190816W02 Test Date :2019-08-22

Operation Band :BLE 1M Temp./Humi. :23.5/64

Frequency :2442 MHz Antenna Pol. :VERTICAL

Operation Mode :TX CH MID Engineer :Kailin


EUT Pol. :H Plan

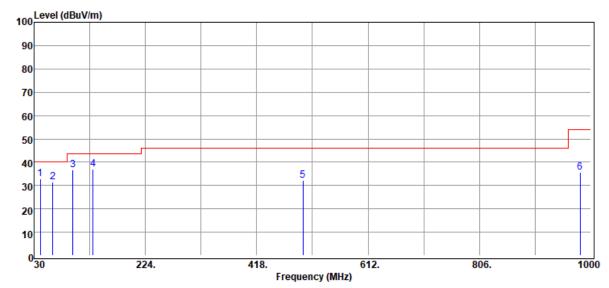

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
40.67	Peak	43.01	-10.14	32.87	40.00	-7.13
62.98	Peak	47.05	-15.49	31.56	40.00	-8.44
97.90	Peak	49.77	-13.24	36.53	43.50	-6.97
132.82	Peak	46.22	-9.25	36.97	43.50	-6.53
498.51	Peak	35.29	-3.03	32.26	46.00	-13.74
981.57	Peak	29.98	5.67	35.65	54.00	-18.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :BLE 1M Temp./Humi. :23.5/64

Frequency :2442 MHz Antenna Pol. :HORIZONTAL


Operation Mode :TX CH MID Engineer :Kailin

EUT Pol. :H Plan

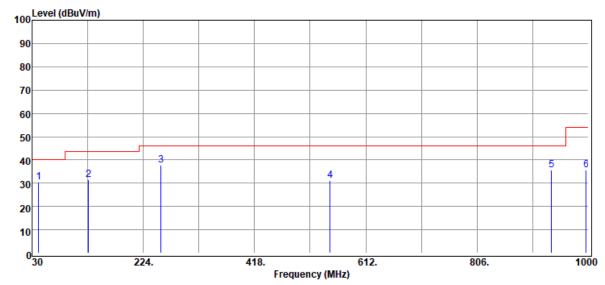

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
41.64	Peak	41.26	-10.69	30.57	40.00	-9.43
128.94	Peak	40.58	-8.95	31.63	43.50	-11.87
255.04	Peak	48.09	-10.26	37.83	46.00	-8.17
549.92	Peak	33.35	-2.32	31.03	46.00	-14.97
935.98	Peak	31.95	3.84	35.79	46.00	-10.21
996.12	Peak	30.36	5.21	35.57	54.00	-18.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





(BLE 2M)


Report Number :T190816W02 Test Date :2019-08-22

Operation Band :BLE 2M Temp./Humi. :23.5/67

Frequency :2442 MHz Antenna Pol. :HORIZONTAL

Operation Mode :TX CH MID Engineer :Kailin


EUT Pol. :H Plan

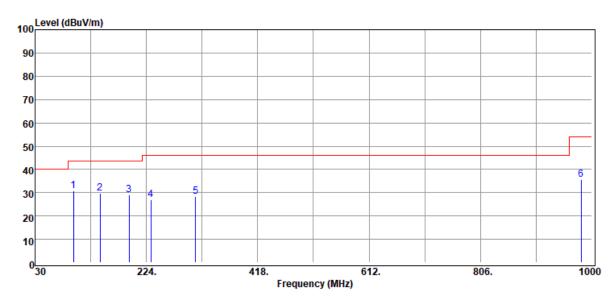

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
N 41 1	Mode	Reading Level	ID.	FS ID V	@3m	ID
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
96.93	Peak	44.15	-13.46	30.69	43.50	-12.81
143.49	Peak	39.59	-9.86	29.73	43.50	-13.77
193.93	Peak	39.40	-10.25	29.15	43.50	-14.35
231.76	Peak	37.90	-10.75	27.15	46.00	-18.85
309.36	Peak	36.28	-7.91	28.37	46.00	-17.63
981.57	Peak	30.00	5.67	35.67	54.00	-18.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :BLE 2M Temp./Humi. :23.5/67

Frequency :2442 MHz Antenna Pol. :VERTICAL

Operation Mode :TX CH MID Engineer :Kailin

EUT Pol. :H Plan

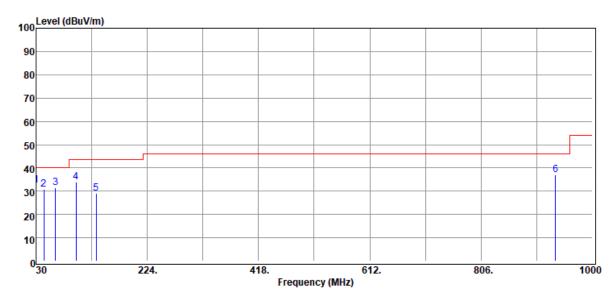

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
30.00	Peak	34.01	-1.51	32.50	40.00	-7.50
43.58	Peak	42.74	-12.05	30.69	40.00	-7.30 -9.31
63.95	Peak	46.94	-12.03	31.66	40.00	-8.34
99.84	Peak	46.73	-12.75	33.98	43.50	-9.52
134.76	Peak	38.53	-9.39	29.14	43.50	-14.36
935.98	Peak	33.26	3.84	37.10	46.00	-8.90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 49 of 64



Radiated Spurious Emission Measurement Result For Frequency above 1GHz (BLE 1M)


Report Number :T190816W02 Test Date :2019-08-22

Operation Band :BLE 1M Temp./Humi. :23.3/68

Frequency :2402 MHz Antenna Pol. :VERTICAL


Operation Mode :TX CH LOW Engineer :Kailin

EUT Pol. :H Plan

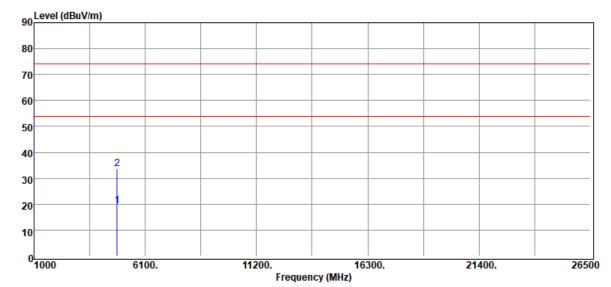

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dΒμV/m	dBμV/m	dB
4804.00	Average	16.46	2.84	19.30	54.00	-34.70
4804.00	Peak	30.73	2.84	33.57	74.00	-40.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :BLE 1M Temp./Humi. :23.3/68

Frequency :2402 MHz Antenna Pol. :HORIZONTAL

Operation Mode :TX CH LOW Engineer :Kailin


EUT Pol. :H Plan

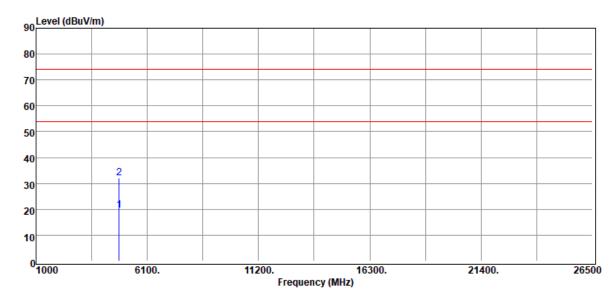

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4804.00	Average	16.86	2.84	19.70	54.00	-34.30
4804.00	Peak	29.15	2.84	31.99	74.00	-42.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :BLE 1M Temp./Humi. :23.3/62

Frequency :2442 MHz Antenna Pol. :VERTICAL

Operation Mode :TX CH MID Engineer :Kailin


EUT Pol. :H Plan

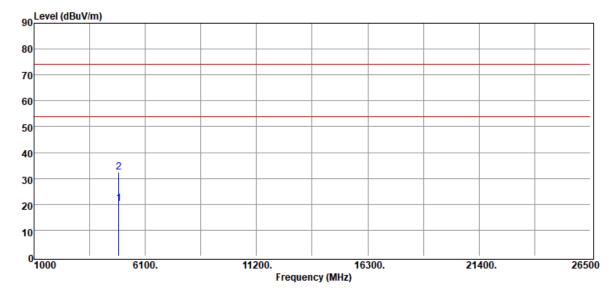

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4884.00	Average	17.21	3.05	20.26	54.00	-33.74
4884.00	Peak	29.42	3.05	32.47	74.00	-41.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :BLE 1M Temp./Humi. :23.3/62

Frequency :2442 MHz Antenna Pol. :HORIZONTAL

Operation Mode :TX CH MID Engineer :Kailin


EUT Pol. :H Plan

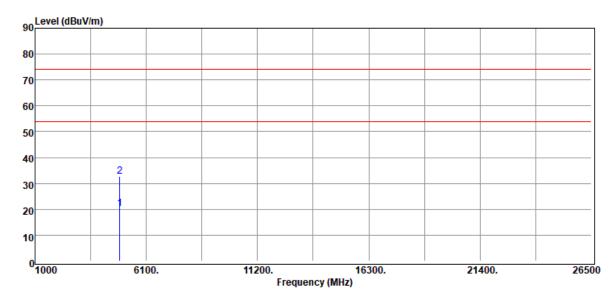

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4884.00	Average	17.06	3.05	20.11	54.00	-33.89
4884.00	Peak	29.67	3.05	32.72	74.00	-41.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :BLE 1M Temp./Humi. :23.1/59

Frequency :2480 MHz Antenna Pol. :VERTICAL


Operation Mode :TX CH HIGH Engineer :Kailin

EUT Pol. :H Plan

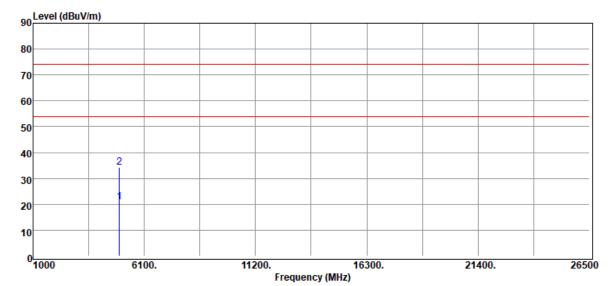

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4960.00	Average	16.93	3.85	20.78	54.00	-33.22
4960.00	Peak	30.27	3.85	34.12	74.00	-39.88

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :BLE 1M Temp./Humi. :23.1/59

Frequency :2480 MHz Antenna Pol. :HORIZONTAL

Operation Mode :TX CH HIGH Engineer :Kailin


EUT Pol. :H Plan

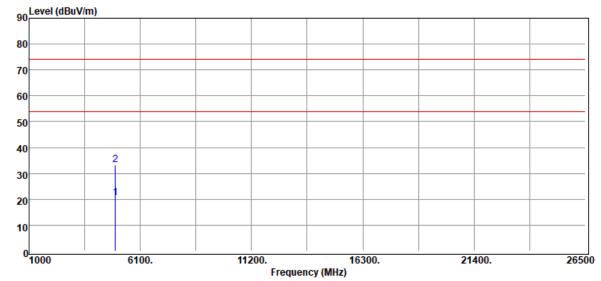

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
 4960.00	Average	16.73	3.85	20.58	54.00	-33.42
4960.00	Peak	29.32	3.85	33.17	74.00	-40.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





(BLE 2M)


Report Number :T190816W02 Test Date :2019-08-22

Operation Band :BLE 2M Temp./Humi. :23.4/63

Frequency :2402 MHz Antenna Pol. :VERTICAL


Operation Mode :TX CH LOW Engineer :Kailin

EUT Pol. :H Plan

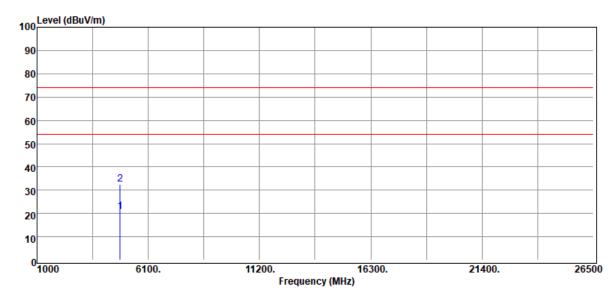

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
4804.00	Average	17.79	2.84	20.63	54.00	-33.37
4804.00	Peak	29.84	2.84	32.68	74.00	-41.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :BLE 2M Temp./Humi. :23.4/63

Frequency :2402 MHz Antenna Pol. :HORIZONTAL

Operation Mode :TX CH LOW Engineer :Kailin


EUT Pol. :H Plan

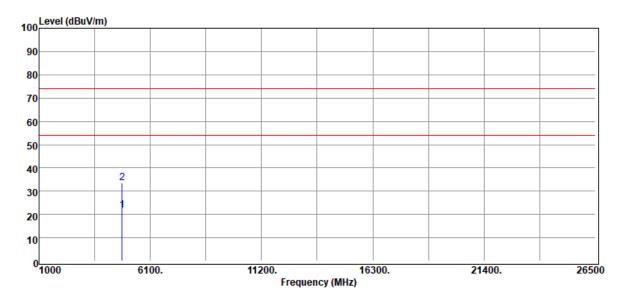

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4804.00	Average	18.92	2.84	21.76	54.00	-32.24
4804.00	Peak	30.83	2.84	33.67	74.00	-40.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :BLE 2M Temp./Humi. :23.2/58

Frequency :2442 MHz Antenna Pol. :VERTICAL

Operation Mode :TX CH MID Engineer :Kailin


EUT Pol. :H Plan

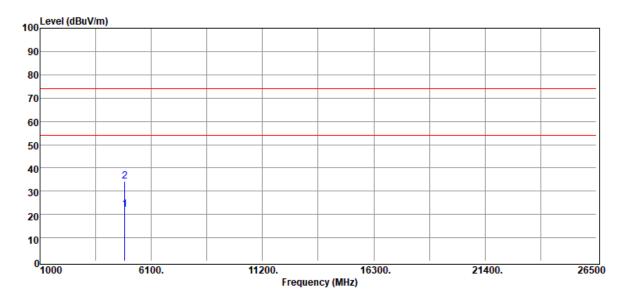

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4884.00	Average	19.05	3.05	22.10	54.00	-31.90
4884.00	Peak	31.27	3.05	34.32	74.00	-39.68

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :BLE 2M Temp./Humi. :23.2/58

Frequency :2442 MHz Antenna Pol. :HORIZONTAL

Operation Mode :TX CH MID Engineer :Kailin


EUT Pol. :H Plan

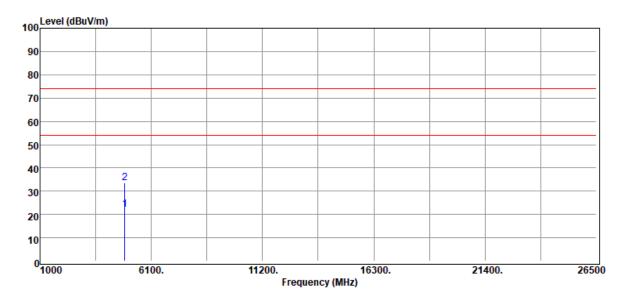

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4884.00	Average	19.02	3.05	22.07	54.00	-31.93
4884.00	Peak	30.55	3.05	33.60	74.00	-40.40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。






Operation Band :BLE 2M Temp./Humi. :23.1/64

Frequency :2480 MHz Antenna Pol. :VERTICAL

Operation Mode :TX CH HIGH Engineer :Kailin


EUT Pol. :H Plan

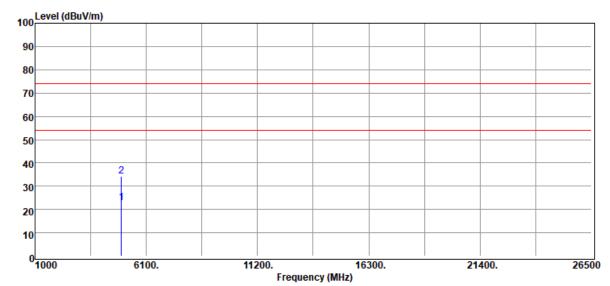

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
4960.00	Average	19.15	3.85	23.00	54.00	-31.00
4960.00	Peak	30.57	3.85	34.42	74.00	-39.58

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。






Operation Band :BLE 2M Temp./Humi. :23.1/64

Frequency :2480 MHz Antenna Pol. :HORIZONTAL

Operation Mode :TX CH HIGH Engineer :Kailin

EUT Pol. :H Plan

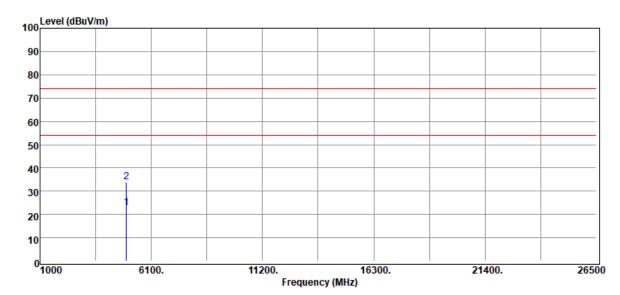

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4960.00	Average	18.96	3.85	22.81	54.00	-31.19
4960.00	Peak	29.97	3.85	33.82	74.00	-40.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 61 of 64

11 PEAK POWER SPECTRAL DENSITY

11.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020	
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019	

11.3 Test Set-up:



11.4 Measurement Procedure:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



11.5 **Measurement Result:**

BLE 1M mode

Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result		
2402	-12.38	8	PASS		
2442	-12.36	8	PASS		
2480	-11.78	8	PASS		

NOTE: cable loss as 12.6dB that offsets in the spectrum

BLE 2M mode

Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2402	-15.89	8	PASS
2442	-15.83	8	PASS
2480	-15.20	8	PASS

NOTE: cable loss as 12.6dB that offsets in the spectrum


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


程智科技股份有限公司




Power Density_BLE_1M_LowCH00-2402

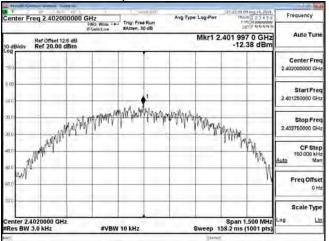


Power Density_BLE_1M_MidCH20-2442

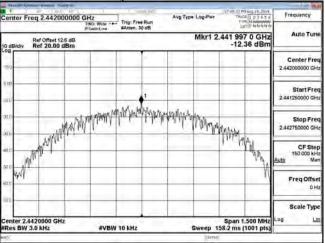


Power Density_BLE_1M_HighCH39-2480

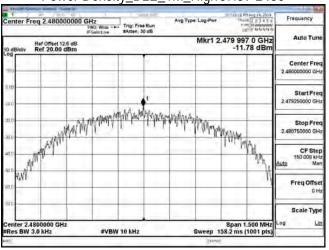


Power Density_BLE_2M_LowCH00-2402

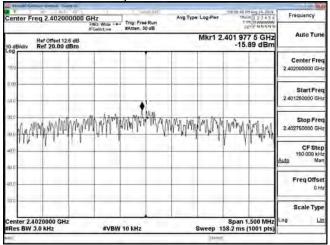

Power Density_BLE_2M_MidCH20-2442

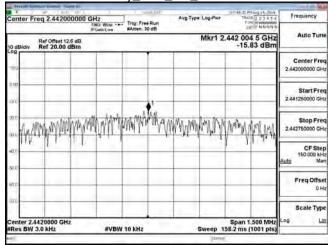

Power Density_BLE_2M_HighCH39-2480

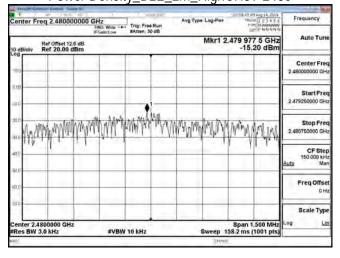

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 64 of 64



12 ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

In case of point-to-point operation, the power shall be reduced by the one dB for every 3 dB that the directional gain of antenna exceeds 6dBi.

12.2 Antenna Connected Construction:

An embedded-in antenna design is used.

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。