


Inverted F Antenna Specification


Summay

ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2400MHz	2450MHz	2500MHz
	-1.26dBi	-0.76dBi	-0.50dBi	-5.25dBi	-3.56dBi	-2.23dBi
MAX.Gain	-0.5dBi					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattem	Omni-directional					
Impedance	50 Ohm					
Antenna Length	10 mm					
Manufacture	ZHUHAI JIELI TECHNOLOGY CO.,LTD					

Antenna Photo & Length

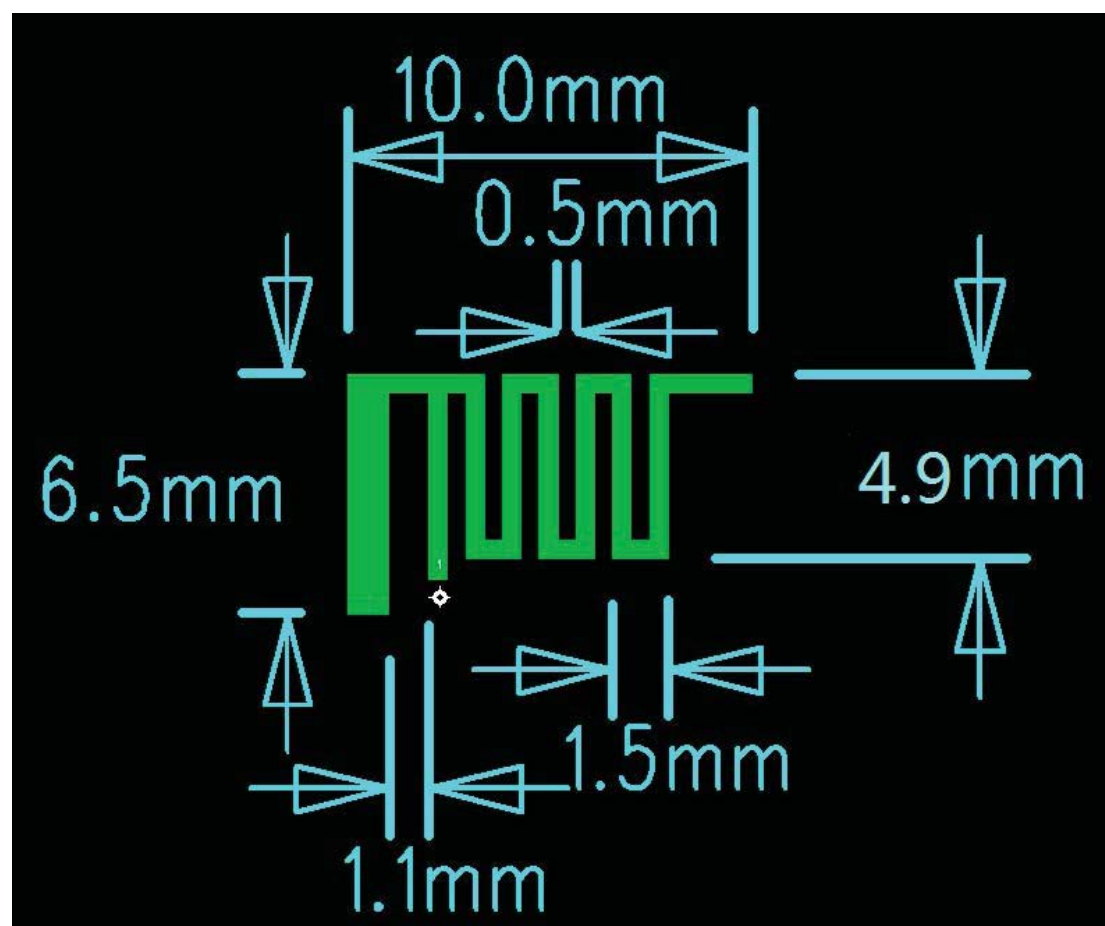


Horizontal: 2400 MHz 2450 MHz 2500 MHz
Power (dBm)
Max: 0 Min: -40 Scale: 5/div

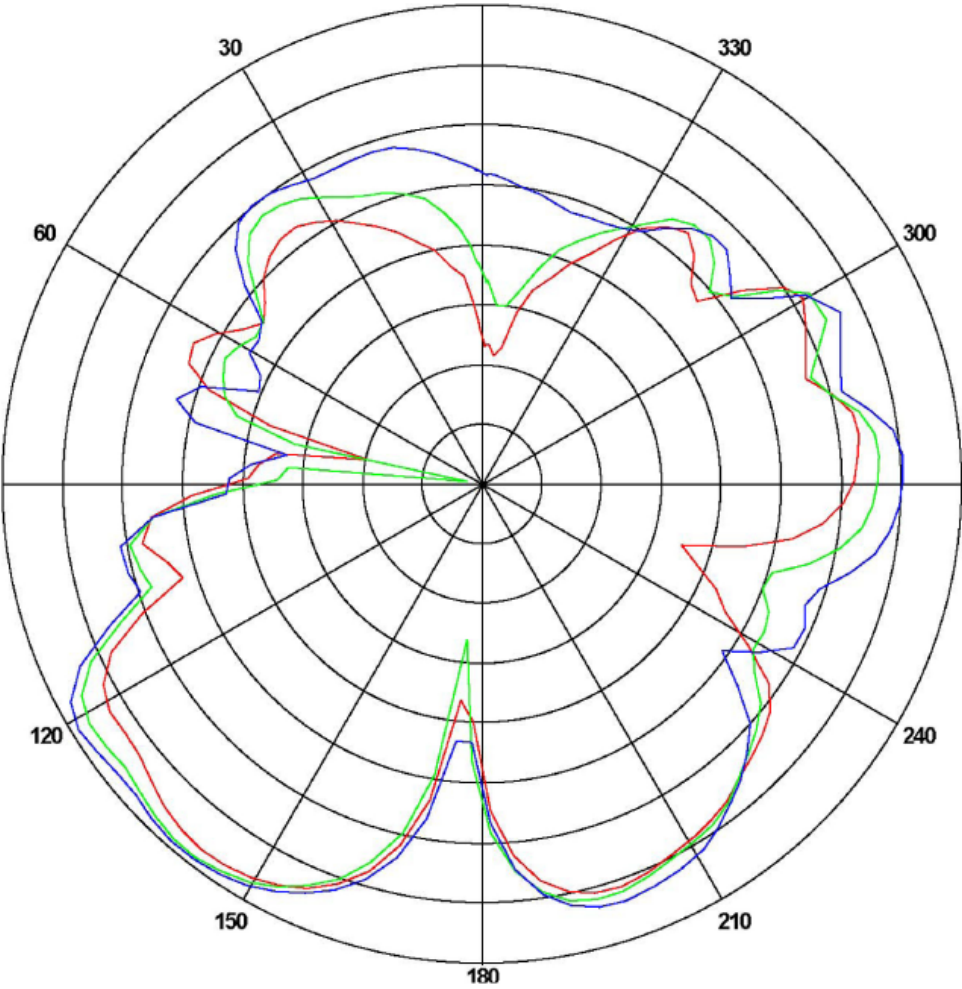

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-1.26181	-30.0801	-7.18829
2450	-0.766201	-36.5612	-7.48003
2500	-0.50000	-22.0316	-6.59127

Vertical: 2400 MHz 2450 MHz 2500 MHz
 Power (dBm)
 Max: 0 Min: -30 Scale: 5/div

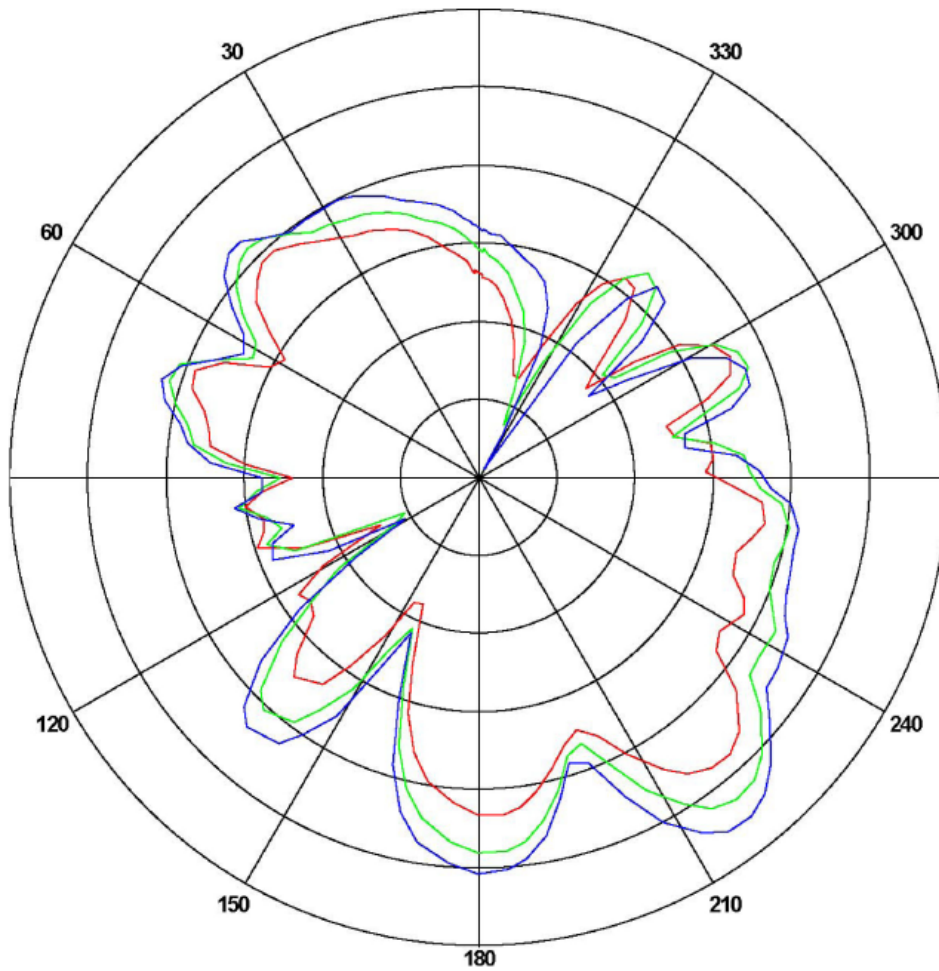

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-5.2536	-22.168	-12.4295
2450	-3.5682	-24.5847	-10.4773
2500	-2.2350	-29.5216	-9.2057

ANT Test Labs: Attestation of Global Compliance Co.,Ltd