



# FCC PART 15C TEST REPORT

No. I23Z70138-IOT05

for

**Samsung Electronics Co., Ltd.**

**Tablet with Bluetooth, WLAN**

**Model Name: SM-X110**

**FCC ID: ZCASM110**

with

**Hardware Version: REV1.0**

**Software Version: X110.001**

**Issued Date: 2023-8-8**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL, Telecommunication Technology Labs, CAICT**

No.52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [cttl\\_terminals@caict.ac.cn](mailto:cttl_terminals@caict.ac.cn), website: [www.chinattl.com](http://www.chinattl.com)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I23Z70138-IOT05	Rev.0	1st edition	2023-8-8

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT .....	6
1.4. PROJECT DATA .....	6
1.5. SIGNATURE .....	6
<b>2. CLIENT INFORMATION .....</b>	<b>7</b>
2.1. APPLICANT INFORMATION .....	7
2.2. MANUFACTURER INFORMATION .....	7
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>8</b>
3.1. ABOUT EUT .....	8
3.2. INTERNAL IDENTIFICATION OF EUT .....	8
3.3. INTERNAL IDENTIFICATION OF AE .....	8
3.4. NORMAL ACCESSORY SETTING .....	8
3.5. GENERAL DESCRIPTION .....	8
<b>4. REFERENCE DOCUMENTS .....</b>	<b>9</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	9
4.2. REFERENCE DOCUMENTS FOR TESTING .....	9
<b>5. TEST RESULTS .....</b>	<b>10</b>
5.1. SUMMARY OF TEST RESULTS .....	10
5.2. STATEMENTS .....	10
5.3. EXPLANATION OF RE-USE OF TEST DATA .....	10
<b>6. TEST FACILITIES UTILIZED .....</b>	<b>11</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>12</b>
7.1. PEAK OUTPUT POWER - CONDUCTED .....	12
7.2. FREQUENCY BAND EDGES - CONDUCTED .....	12
7.3. FREQUENCY BAND EDGES - RADIATED .....	12
7.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED .....	12
7.5. TRANSMITTER SPURIOUS EMISSION - RADIATED .....	12
7.6. TIME OF OCCUPANCY (DWELL TIME) .....	12
7.7. 20DB BANDWIDTH .....	13
7.8. CARRIER FREQUENCY SEPARATION .....	13
7.9. AC POWERLINE CONDUCTED EMISSION .....	13
<b>ANNEX A: EUT PARAMETERS .....</b>	<b>14</b>
<b>ANNEX B: DETAILED TEST RESULTS .....</b>	<b>15</b>
B.1. MEASUREMENT METHOD .....	15



B.2. PEAK OUTPUT POWER.....	16
B.3. FREQUENCY BAND EDGES – CONDUCTED .....	18
B.4. FREQUENCY BAND EDGES –RADIATED.....	25
B.5. TRANSMITTER SPURIOUS EMISSION - CONDUCTED .....	29
B.6. TRANSMITTER SPURIOUS EMISSION - RADIATED .....	54
B.7. TIME OF OCCUPANCY (DWEELL TIME).....	61
B.8. 20dB BANDWIDTH.....	72
B.9. CARRIER FREQUENCY SEPARATION .....	78
B.10. NUMBER OF HOPPING CHANNELS.....	81
B.11. AC POWERLINE CONDUCTED EMISSION .....	85
<b>ANNEX C: ACCREDITATION CERTIFICATE .....</b>	<b>89</b>

## **1. Test Laboratory**

### **1.1. Introduction &Accreditation**

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Radiated testing Location:

CTTL(BDA)

Address: No. 18A, Kangding Street, Beijing Economic-Technology  
Development Area, Beijing, 100176, P.R. China

CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

### 1.3. Testing Environment

Normal Temperature: 20-27℃  
Relative Humidity: 20-50%

### 1.4. Project data

Testing Start Date: 2023-6-5  
Testing End Date: 2023-7-28

### 1.5. Signature




---

**Wu Le**  
(Prepared this test report)



---

**Sun Zhenyu**  
(Reviewed this test report)



---

**Hu Xiaoyu**  
(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Samsung Electronics Co., Ltd.  
Address /Post: 19 Chapin Rd., Building D Pine Brook, NJ 07058  
Contact Person: Jenni Chun  
Contact Email: j1.chun@samsung.com  
Telephone: +1-201-937-4203  
Fax: /

### **2.2. Manufacturer Information**

Company Name: Samsung Electronics Co., Ltd.  
Address /Post: Samsung R5, Maetan dong 129, Samsung ro  
Youngtong gu, Suwon city 443 742, Korea  
Contact Person: JP KIM  
Contact Email: jp426.kim@samsung.com  
Telephone: +82-10-4376-0326  
Fax: /

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Tablet with Bluetooth, WLAN
Model Name	SM-X110
FCC ID	ZCASM110
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	GFSK/π/4 DQPSK/8DPSK
Number of Channels	79
Power Supply	3.82V DC by Battery
Antenna gain	-0.5dBi

#### **3.2. Internal Identification of EUT**

<b>EUT ID*</b>	<b>SN or IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Date of receipt</b>
UT07a	/	REV1.0	X110.001	/
UT01a	/	REV1.0	X110.001	/

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE**

<b>AE ID*</b>	<b>Name</b>	<b>Model</b>	<b>Manufacturer</b>
AE1	Battery	HQ-3565S	SCUD(Fujian) Electronics Co., LTD.
AE2	Adapter	EP-T1510	DONGYANG
AE3	Date Cable C-C	EP-DN980BWE	Samsung Electronics Co.,Ltd
AE5	Headset	ESH61ASFWE	/

\*AE ID: is used to identify the test sample in the lab internally.

\*AE2 and A5 are not the AE for EUT, provided by the client for relevant tests.

#### **3.4. Normal Accessory setting**

Fully charged battery should be used during the test.

#### **3.5. General Description**

The Equipment Under Test (EUT) is a model of Tablet with Bluetooth, WLAN with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.



## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT parameters, referring to Annex A for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part15	FCC CFR 47, Part 15, Subpart C:	2021
	15.205 Restricted bands of operation;	
	15.209 Radiated emission limits, general requirements;	
ANSI C63.10	15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	June,2013
	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	

## 5. Test Results

### 5.1. Summary of Test Results

Abbreviations used in this clause:

- P** Pass, The EUT complies with the essential requirements in the standard.
- F** Fail, The EUT does not comply with the essential requirements in the standard
- NA** Not Applicable, The test was not applicable
- NP** Not Performed, The test was not performed by CTTL
- R** Re-use test data from basic model report

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power	15.247 (b)(1)	<b>R</b>
Frequency Band Edges- Conducted	15.247 (d)	<b>R</b>
Frequency Band Edges- Radiated	15.247, 15.205, 15.209	<b>R</b>
Transmitter Spurious Emission - Conducted	15.247 (d)	<b>R</b>
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	<b>R</b>
Time of Occupancy (Dwell Time)	15.247 (a) (1)(iii)	<b>R</b>
20dB Bandwidth	15.247 (a)(1)	<b>R</b>
Carrier Frequency Separation	15.247 (a)(1)	<b>R</b>
Number of hopping channels	15.247 (a)(iii)	<b>R</b>
AC Powerline Conducted Emission	15.107, 15.207	<b>R</b>

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

### 5.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

### 5.3. Explanation of re-use of test data

The Equipment Under Test (EUT) model SM-X110 (FCC ID: ZCASM110) are variant products of SM-X115 (FCC ID: ZCASM115), according to the declaration of changes provided by the applicant and FCC KDB publication 178919 D01, all the test results are derived from test report No.I23Z70136-IOT01.

For detail differences between two models please refer the Declaration of Changes document.

## 6. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	100024	R&S	1 year	2024-03-09
2	Bluetooth Tester	CBT	100315	R&S	1 year	2024-03-08
6	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	R&S	1 year	2023-09-22
2	Test Receiver	FSV40	101047	R&S	1 year	2024-06-25
3	Test Receiver	ESW44	103144	R&S	1 year	2023-10-25
4	Loop Antenna	HFH2-Z2	829324/007	R&S	1 year	2023-12-22
5	EMI Antenna	VULB9163	01177	Schwarzbeck	1 year	2023-08-03
6	EMI Antenna	3117	00119021	ETS-Lindgren	1 year	2024-06-24
7	EMI Antenna	LB-180400 -25-C-KF	21100840000 06	A-INFO	1 year	2024-03-02
8	Universal Radio Communication Tester	CMW500	159408	R&S	1 year	2024-03-26

### AC Power Line Conducted Emission

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	LISN	ENV216	101459	R&S	1 year	2024-02-29
2	Test Receiver	ESCI	100766	R&S	1 year	2024-03-30
3	Universal Radio Communication Tester	CMW500	159408	R&S	1 year	2024-03-26

## 7. Measurement Uncertainty

### 7.1. Peak Output Power - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

### 7.2. Frequency Band Edges - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

### 7.3. Frequency Band Edges - Radiated

Measurement Uncertainty:

Measurement Uncertainty (k=2)	/
-------------------------------	---

### 7.4. Transmitter Spurious Emission - Conducted

Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

### 7.5. Transmitter Spurious Emission - Radiated

Measurement Uncertainty:

Frequency Range	Uncertainty(dBm) (k=2)
9kHz-30MHz	4.92
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.73
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.58
$18\text{GHz} \leq f \leq 40\text{GHz}$	3.37

### 7.6. Time of Occupancy (Dwell Time)

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.88ms
-------------------------------	--------

### 7.7. 20dB Bandwidth

#### Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

### 7.8. Carrier Frequency Separation

#### Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

### 7.9. AC Powerline Conducted Emission

#### Measurement Uncertainty:

Measurement Uncertainty (k=2)	3.10dB
-------------------------------	--------

## **ANNEX A: EUT parameters**

Disclaimer: The antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.


## **ANNEX B: Detailed Test Results**

### **B.1. Measurement Method**

#### **B.1.1. Conducted Measurements**

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer

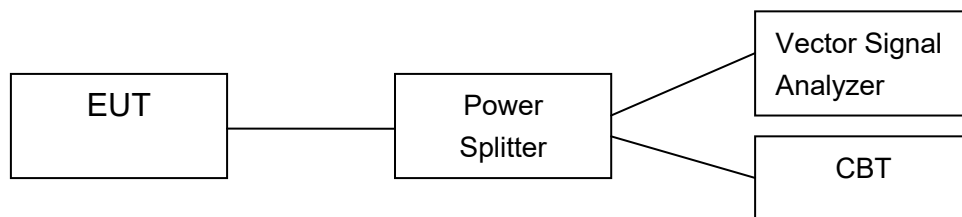

#### **B.1.2. Radiated Emission Measurements**


The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 3MHz;

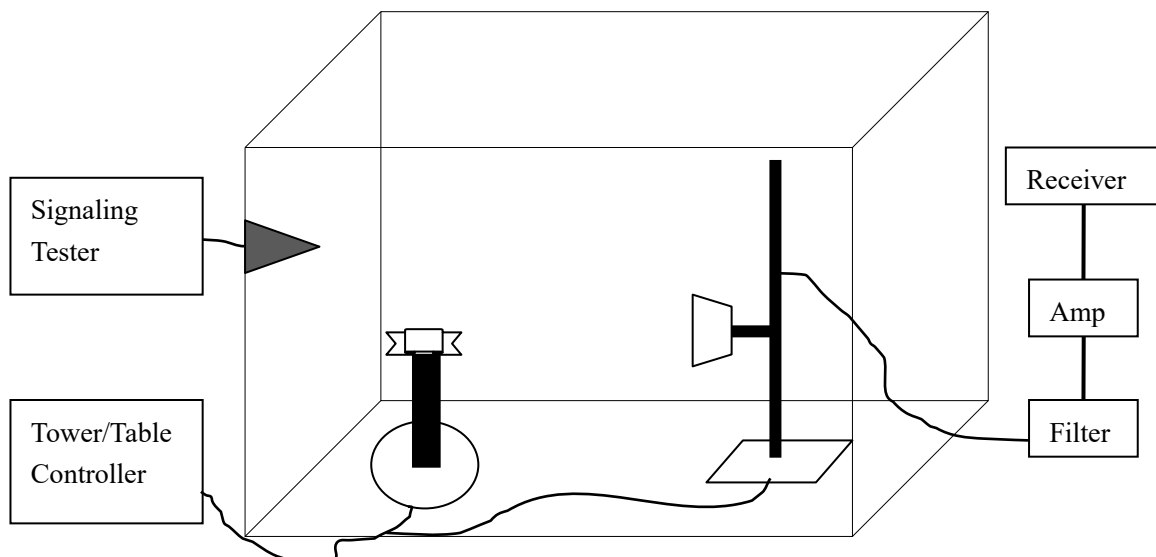

## B.2. Peak Output Power

### B.2.1. Peak Output Power – Conducted

**Method of Measurement: See ANSI C63.10-clause 7.8.5**

a) Use the following spectrum analyzer settings:

- Span: 6MHz
- RBW: 3MHz
- VBW: 3MHz
- Sweep time: 2.5ms
- Detector function: peak
- Trace: max hold

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power.

#### Measurement Limit:

Standard	Limits	
FCC Part 15.247 (b)(1)	Bandwidth $\leq$ 1MHz	30dBm (1W)
	Bandwidth $>$ 1MHz	21dBm (125mW)

#### Measurement Results:

##### For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	5.38	5.12	5.15	P

##### For $\pi/4$ DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	4.42	3.93	3.92	P

##### For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	4.30	4.06	4.08	P

**Conclusion: PASS**



### B.2.2. E.I.R.P.

The radiated E.I.R.P. is listed below:

Antenna gain = -0.5dBi

#### For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	4.88	4.62	4.65	P

#### For $\pi/4$ DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	3.92	3.43	3.42	P

#### For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	3.80	3.56	3.58	P

Note: E.I.R.P. are calculated with the antenna gain.

**Conclusion: PASS**

### B.3. Frequency Band Edges – Conducted

#### Method of Measurement: See ANSI C63.10-clause 7.8.6

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).

- Span: 10 MHz
- Resolution Bandwidth: 100 kHz
- Video Bandwidth: 300 kHz
- Sweep Time: Auto
- Detector: Peak
- Trace: max hold

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

#### Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	< -20

#### Measurement Result:

##### For GFSK

Channel	Hopping	Band Edge Power ( dBc)		Conclusion
0	Hopping OFF	Fig.1	-58.54	P
	Hopping ON	Fig.2	-58.97	P
78	Hopping OFF	Fig.3	-60.82	P
	Hopping ON	Fig.4	-61.82	P

##### For $\pi/4$ DQPSK

Channel	Hopping	Band Edge Power ( dBc)		Conclusion
0	Hopping OFF	Fig.5	-59.17	P
	Hopping ON	Fig.6	-61.02	P
78	Hopping OFF	Fig.7	-59.34	P
	Hopping ON	Fig.8	-59.11	P

##### For 8DPSK

Channel	Hopping	Band Edge Power ( dBc)		Conclusion
0	Hopping OFF	Fig.9	-59.69	P
	Hopping ON	Fig.10	-60.36	P

78	Hopping OFF	Fig.11	-59.87	P
	Hopping ON	Fig.12	-57.59	P

**Conclusion: PASS**

**Test graphs as below**

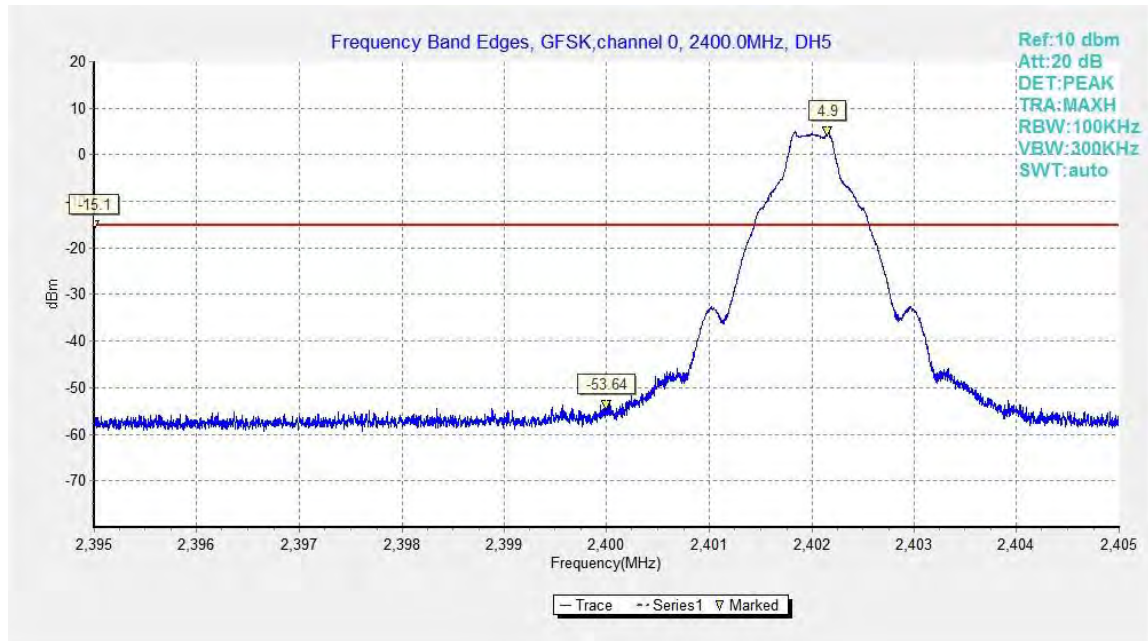


Fig.1. Frequency Band Edges: GFSK, Channel 0, Hopping Off

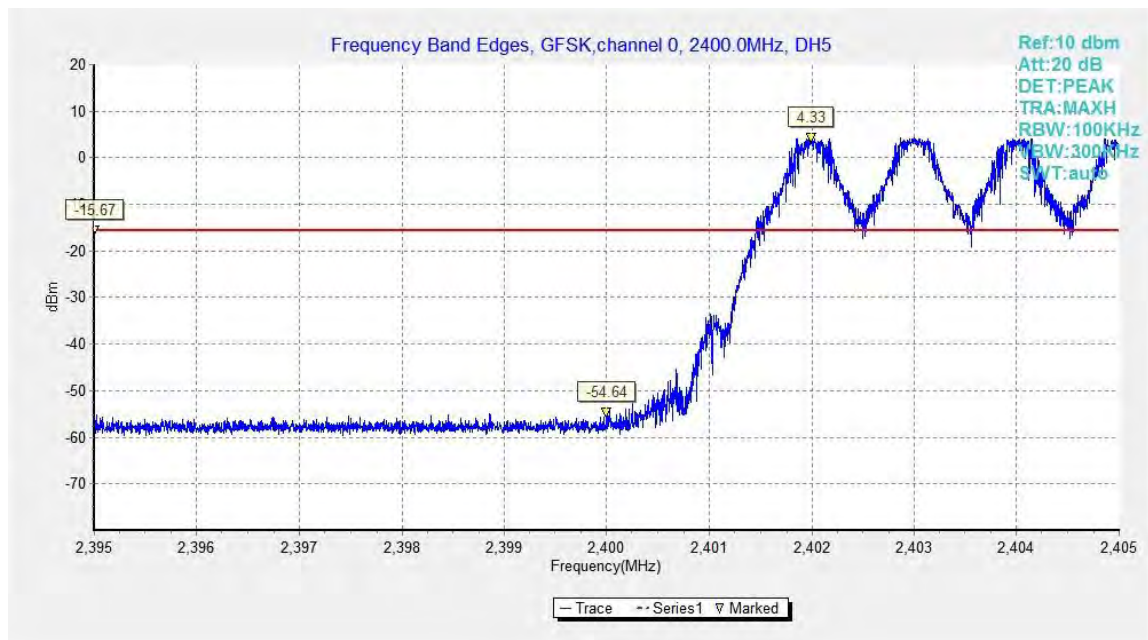


Fig.2. Frequency Band Edges: GFSK, Channel 0, Hopping On

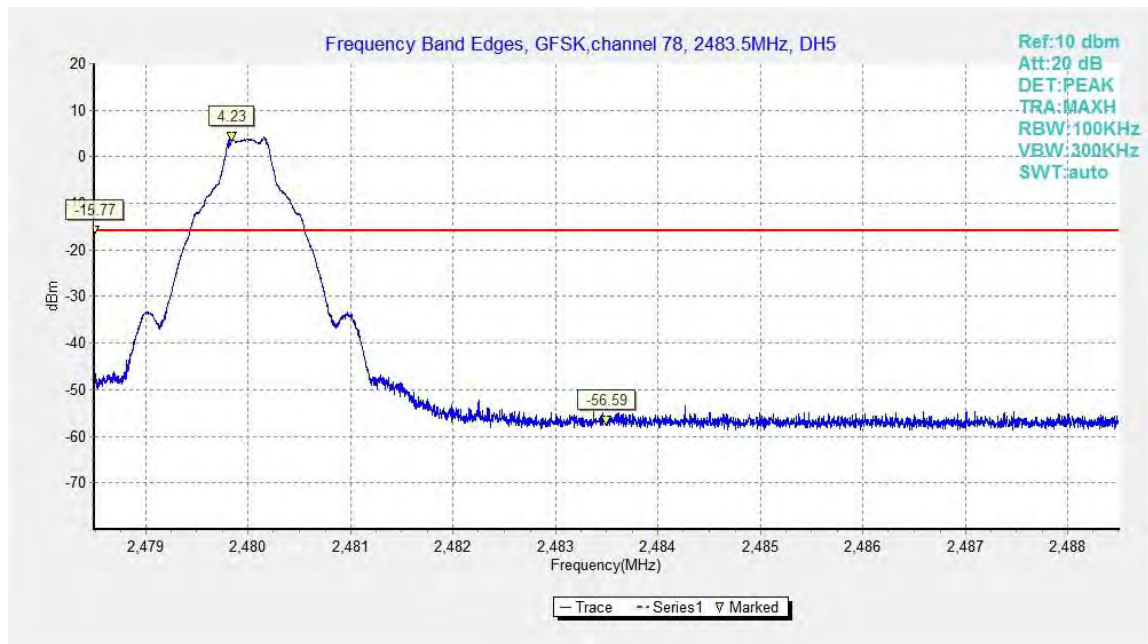


Fig.3. Frequency Band Edges: GFSK, Channel 78, Hopping Off

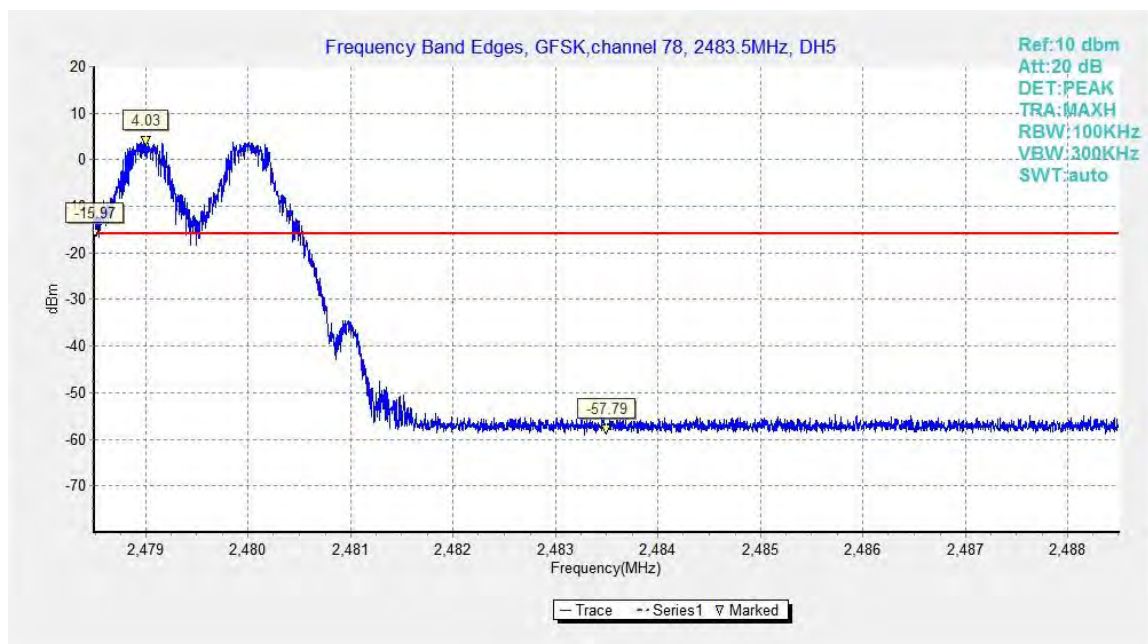


Fig.4. Frequency Band Edges: GFSK, Channel 78, Hopping On



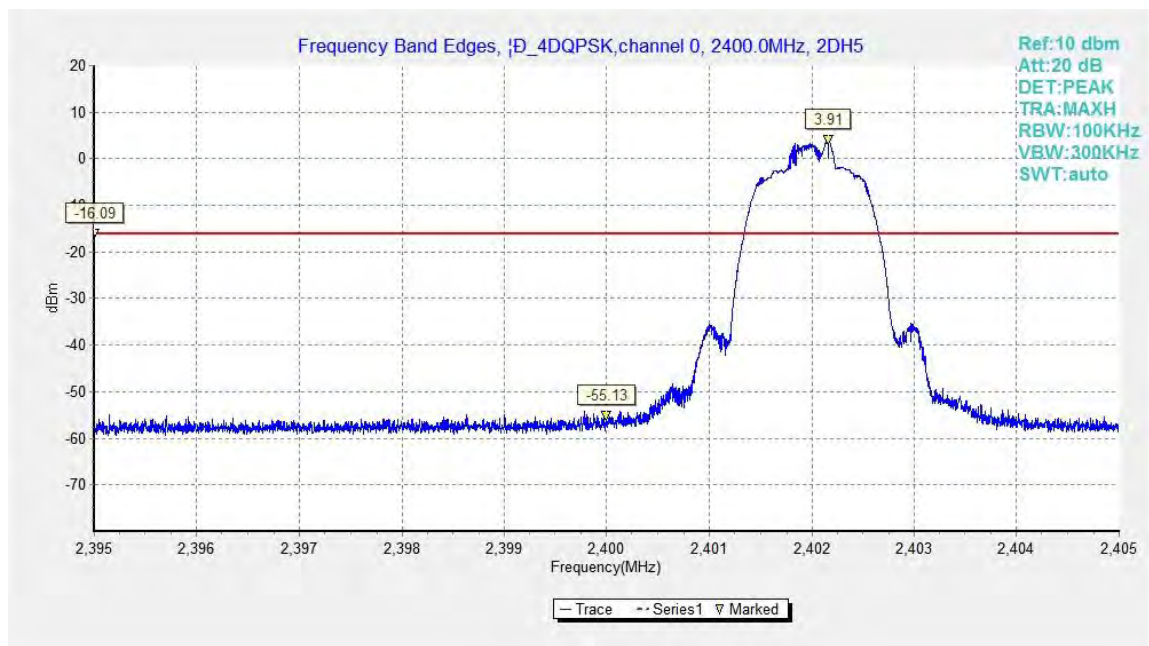


Fig.5. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 0, Hopping Off

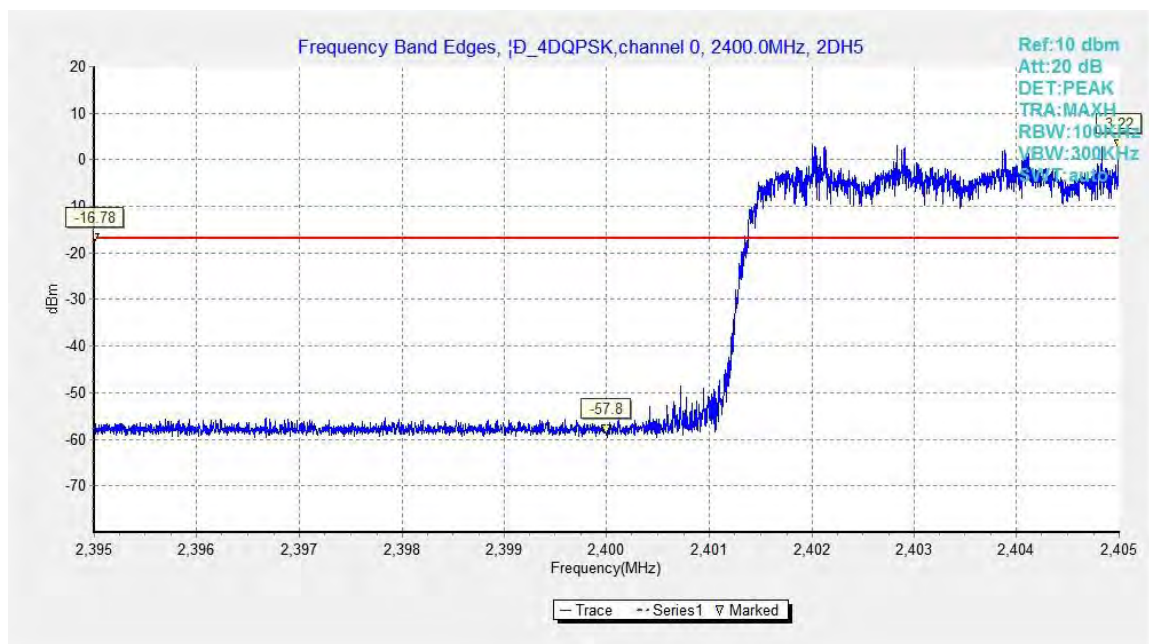


Fig.6. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 0, Hopping On

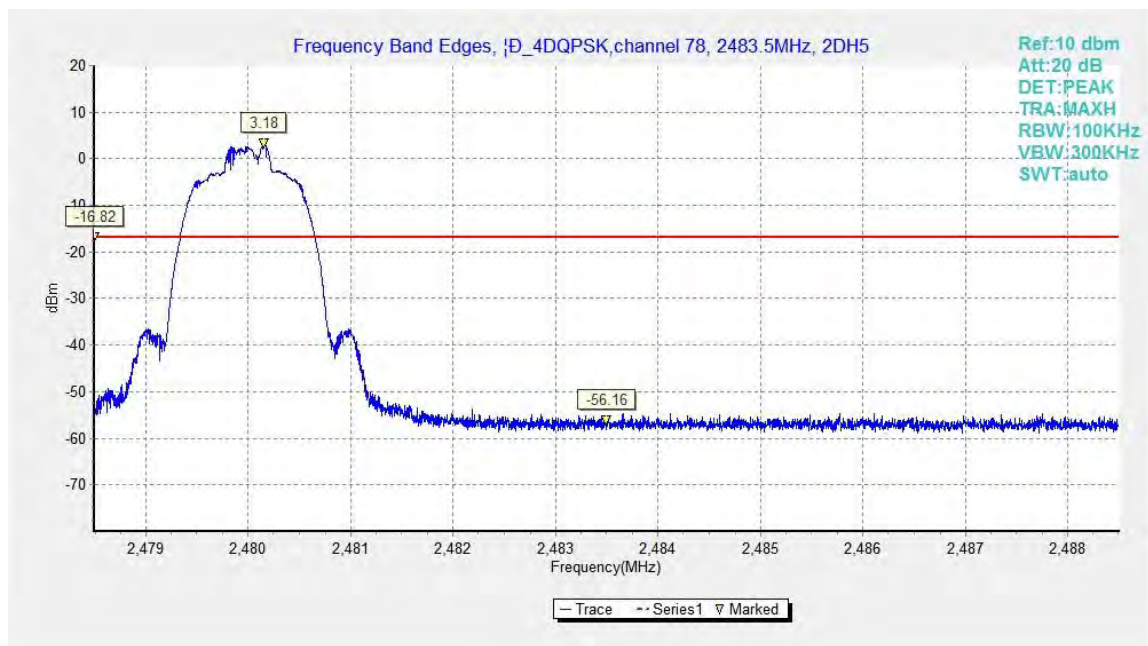


Fig.7. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 78, Hopping Off

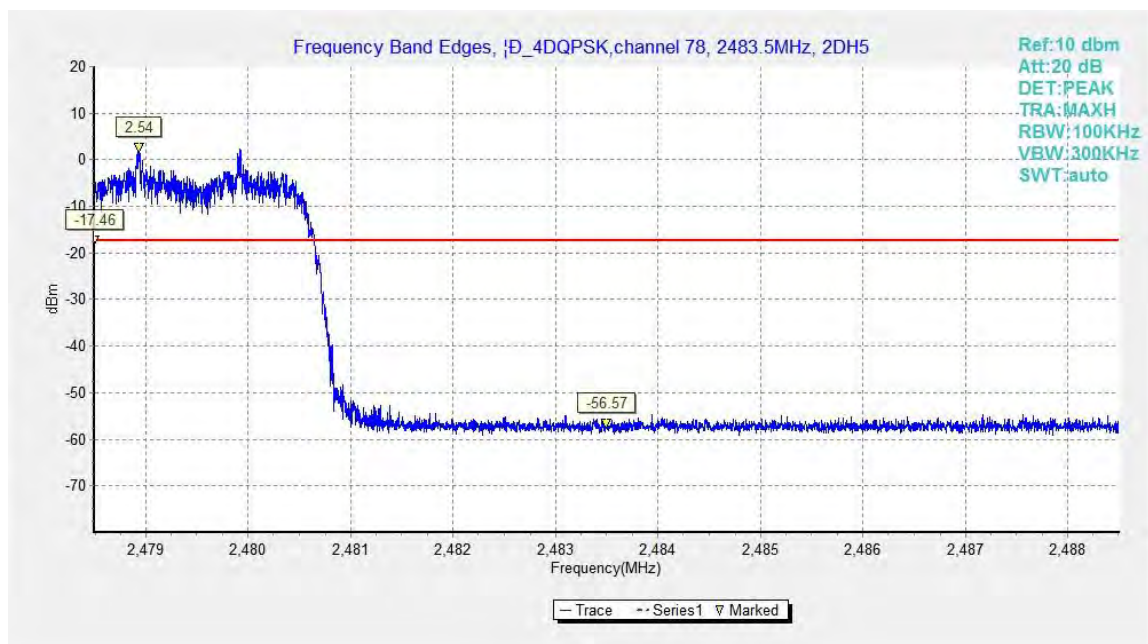


Fig.8. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 78, Hopping On

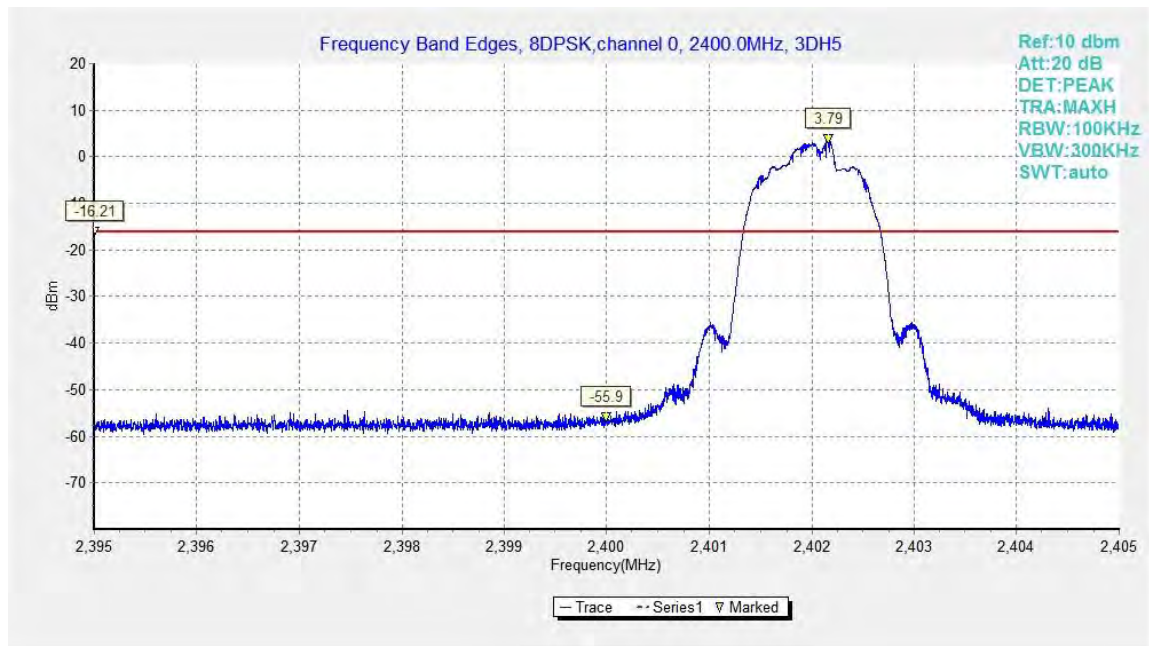


Fig.9. Frequency Band Edges: 8DPSK, Channel 0, Hopping Off

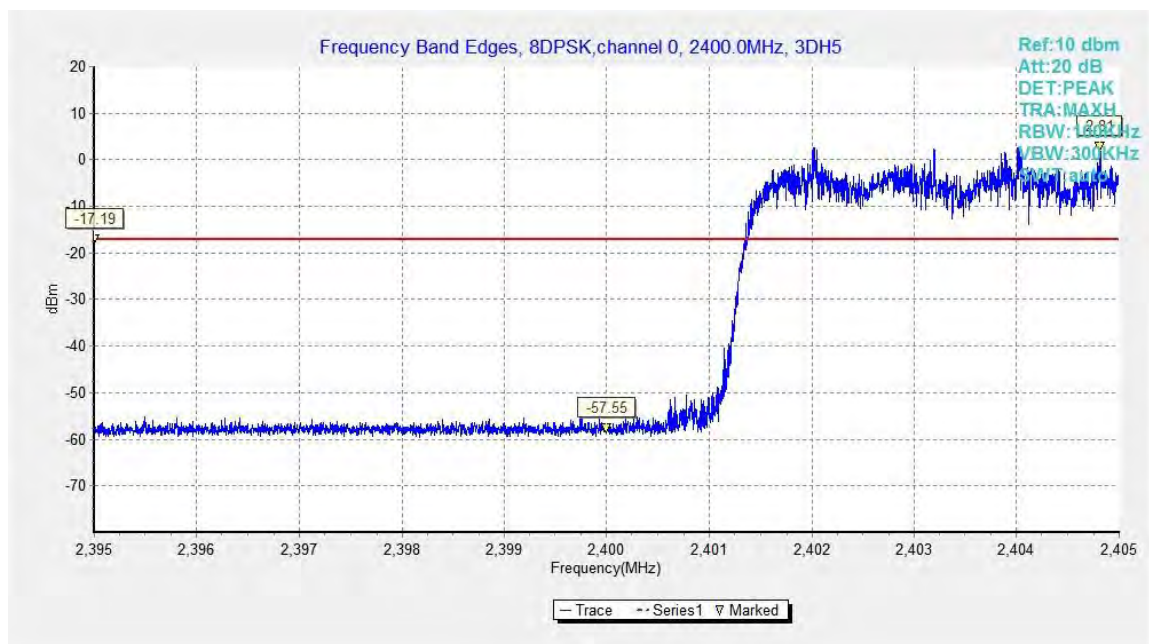


Fig.10. Frequency Band Edges: 8DPSK, Channel 0, Hopping On



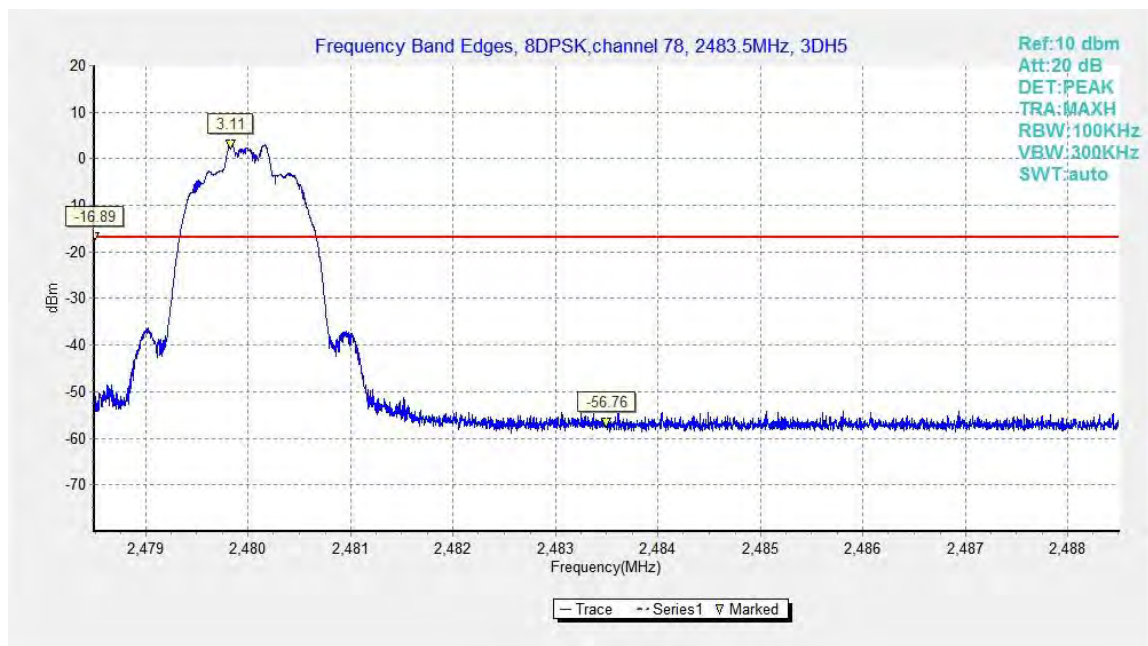


Fig.11. Frequency Band Edges: 8DPSK, Channel 78, Hopping Off

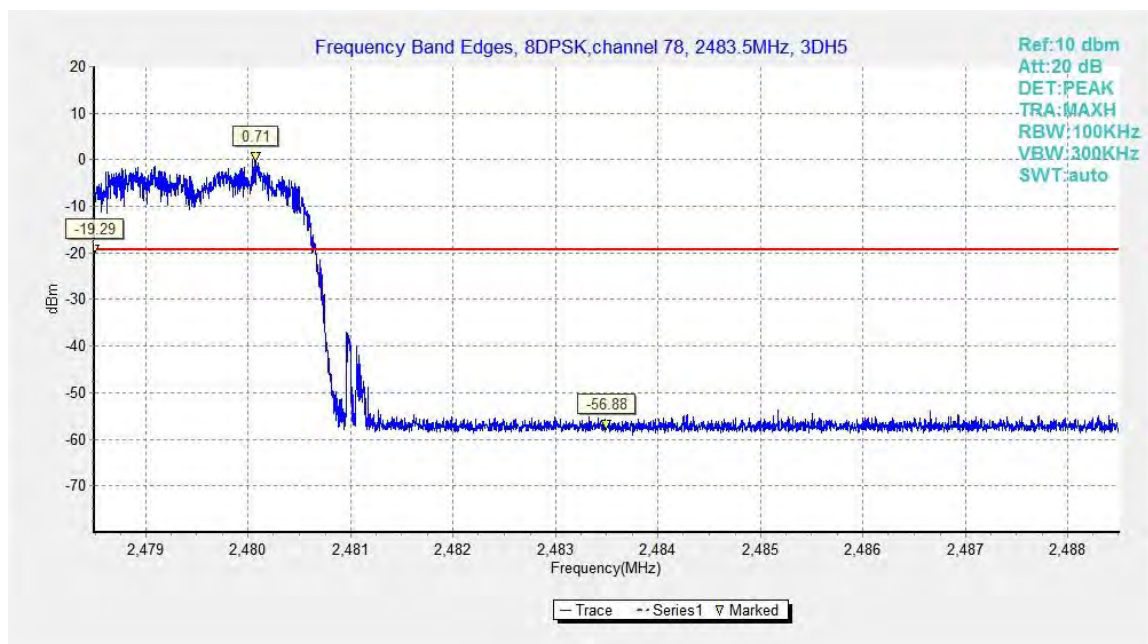


Fig.12. Frequency Band Edges: 8DPSK, Channel 78, Hopping On



## B.4. Frequency Band Edges –Radiated

**Method of Measurement:** See ANSI C63.10-clause 6.4 &6.5 & 6.6

**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Limit in restricted band:**

Frequency of emission (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
Above 960	500	54	3

**Set up:**

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m and the table height shall be 1.5 m.

The EUT and transmitting antenna shall be centered on the turntable.

**Measurement Results:**

**EUT ID: UT07a**


Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.31GHz ~2.45GHz	Fig.13	P
	78	2.45GHz ~2.5GHz	Fig.14	P

Mode	Channel	Frequency Range	Test Results	Conclusion
$\pi/4$ DQPSK	0	2.31GHz ~2.43GHz	Fig.15	P
	78	2.45GHz ~2.5GHz	Fig.16	P


Mode	Channel	Frequency Range	Test Results	Conclusion
8DPSK	0	2.31GHz ~2.45GHz	Fig.17	P
	78	2.45GHz ~2.5GHz	Fig.18	P

**Conclusion: PASS**


Test graphs as below

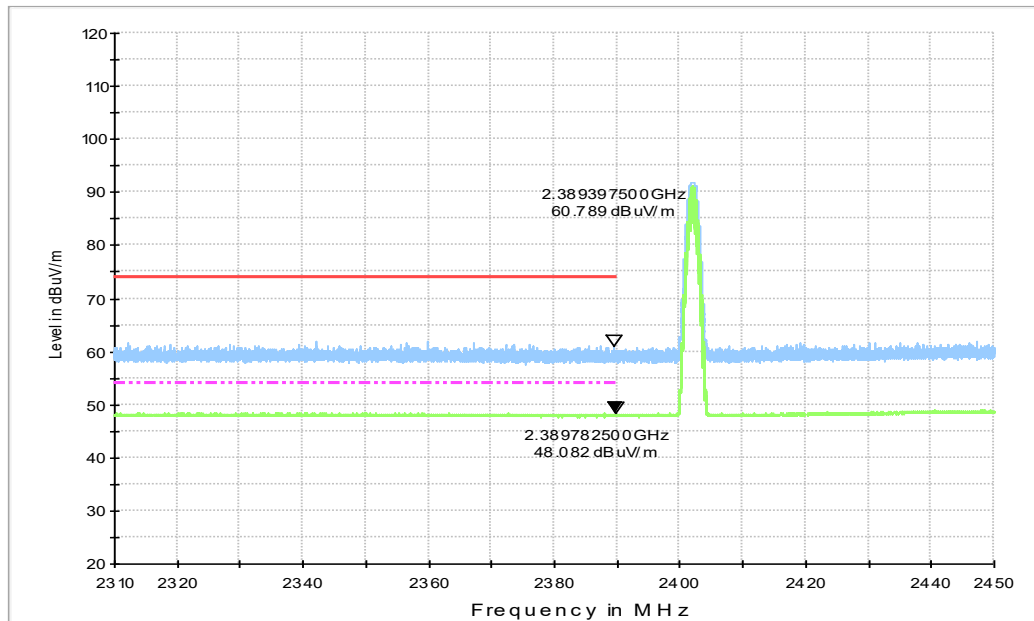


**Fig.13. Frequency Band Edges: GFSK, Channel 0, 2.31 GHz – 2.45GHz**

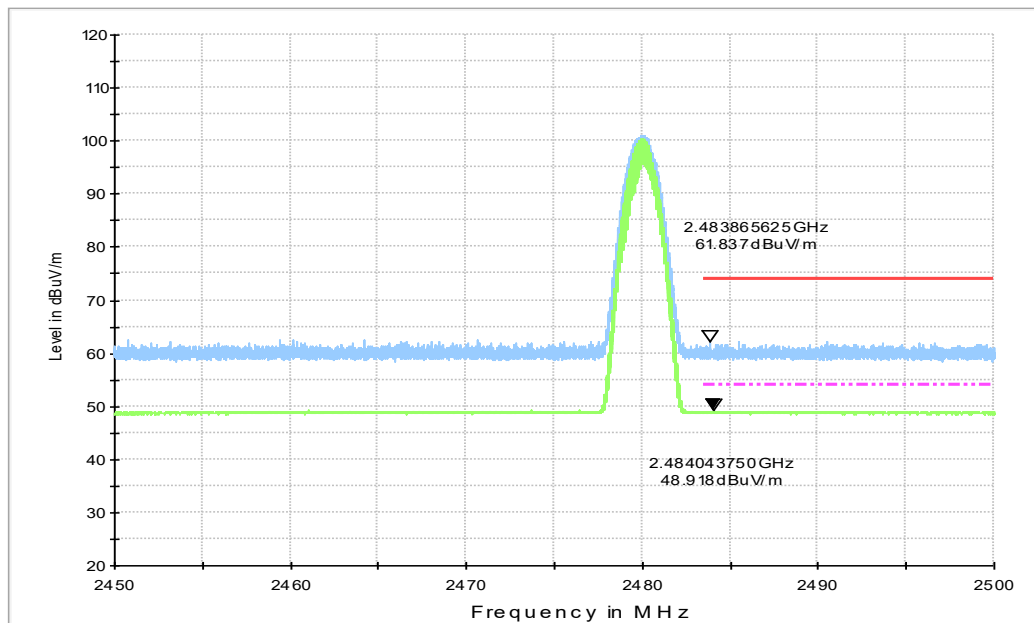


**Fig.14. Frequency Band Edges: GFSK, Channel 78, 2.45 GHz - 2.50GHz**

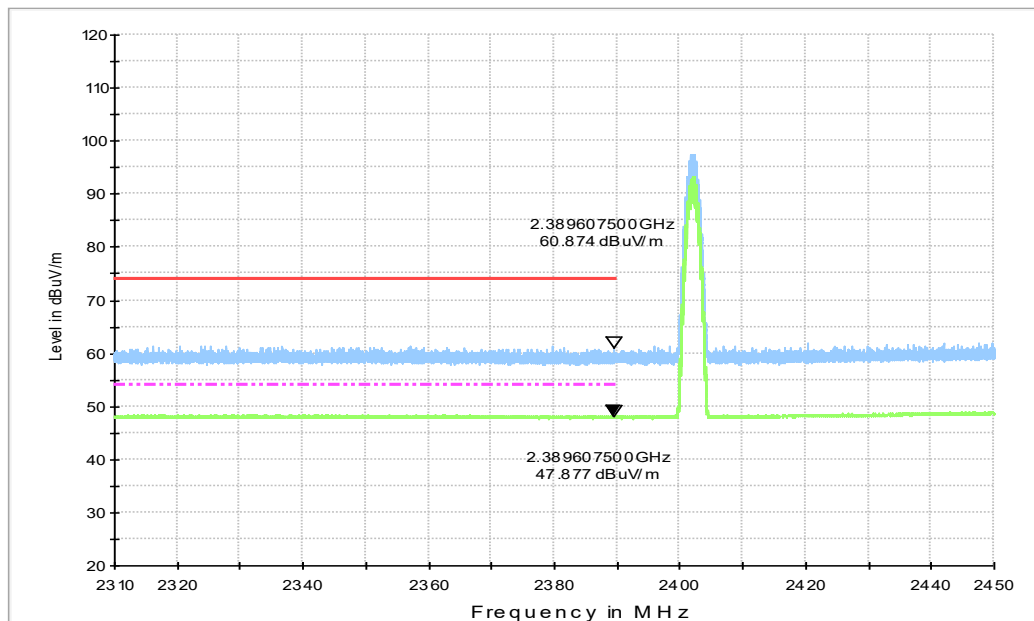


**Fig.15. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 0, 2.31 GHz - 2.45GHz**

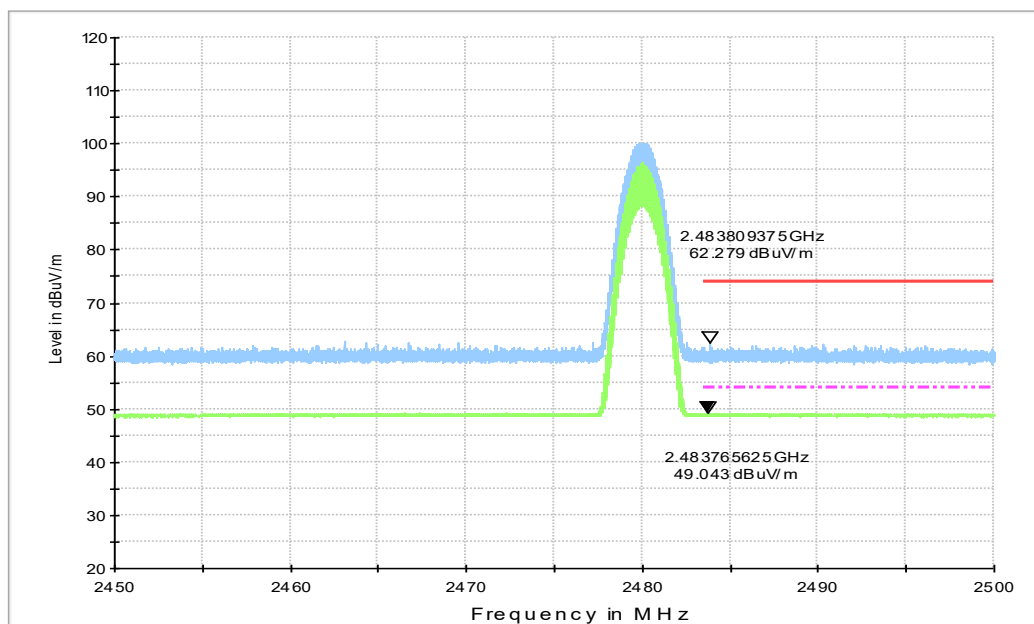

**Fig.16. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 78, 2.45 GHz - 2.50GHz**

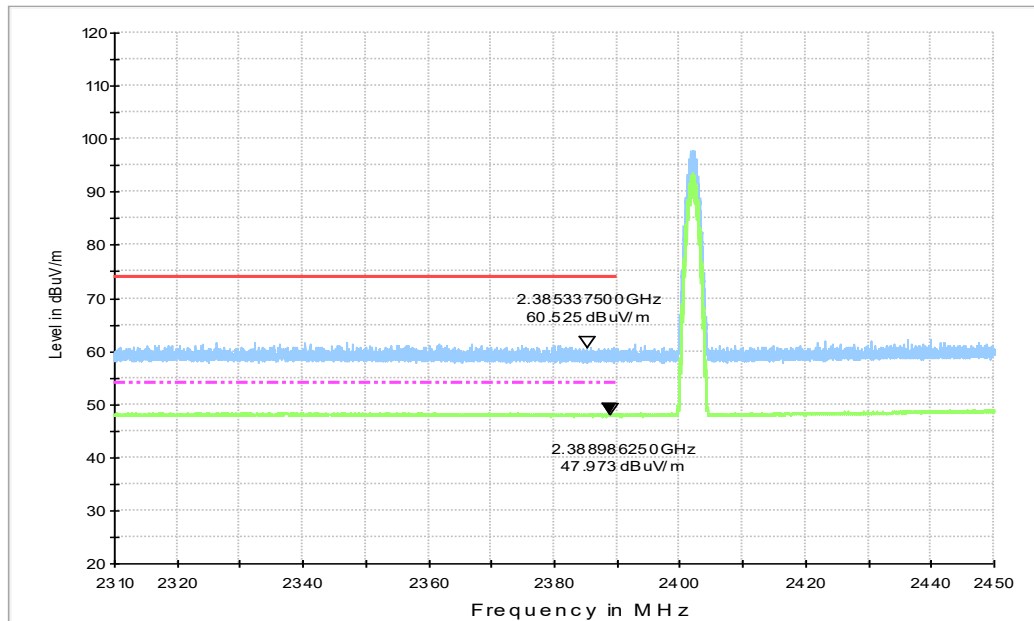

**Fig.17. Frequency Band Edges: 8DPSK, Channel 0, 2.38 GHz - 2.45GHz**

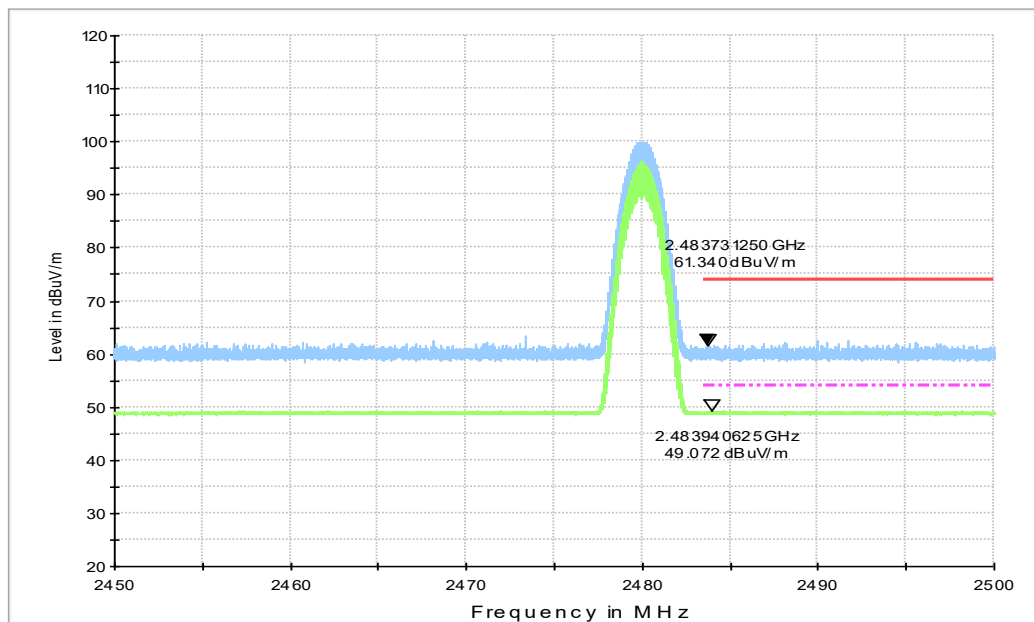

**Fig.18. Frequency Band Edges: 8DPSK, Channel 78, 2.45 GHz - 2.50GHz**

## B.5. Transmitter Spurious Emission - Conducted

### Method of Measurement: See ANSI C63.10-clause 7.8.8

#### Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to 5-30 % greater than the EBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

#### Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
2. Set VBW = 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

### Measurement Results:

#### For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0	Center Frequency	Fig.19	P

2402 MHz	30 MHz ~ 1 GHz	Fig.20	P
	1 GHz ~ 3 GHz	Fig.21	P
	3 GHz ~ 10 GHz	Fig.22	P
	10 GHz ~ 26 GHz	Fig.23	P
Ch 39 2441 MHz	Center Frequency	Fig.24	P
	30 MHz ~ 1 GHz	Fig.25	P
	1 GHz ~ 3 GHz	Fig.26	P
	3 GHz ~ 10 GHz	Fig.27	P
	10 GHz ~ 26 GHz	Fig.28	P
Ch 78 2480 MHz	Center Frequency	Fig.29	P
	30 MHz ~ 1 GHz	Fig.30	P
	1 GHz ~ 3 GHz	Fig.31	P
	3 GHz ~ 10 GHz	Fig.32	P
	10 GHz ~ 26 GHz	Fig.33	P

#### For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.34	P
	30 MHz ~ 1 GHz	Fig.35	P
	1 GHz ~ 3 GHz	Fig.36	P
	3 GHz ~ 10 GHz	Fig.37	P
	10 GHz ~ 26 GHz	Fig.38	P
Ch 39 2441 MHz	Center Frequency	Fig.39	P
	30 MHz ~ 1 GHz	Fig.40	P
	1 GHz ~ 3 GHz	Fig.41	P
	3 GHz ~ 10 GHz	Fig.42	P
	10 GHz ~ 26 GHz	Fig.43	P
Ch 78 2480 MHz	Center Frequency	Fig.44	P
	30 MHz ~ 1 GHz	Fig.45	P
	1 GHz ~ 3 GHz	Fig.46	P
	3 GHz ~ 10 GHz	Fig.47	P
	10 GHz ~ 26 GHz	Fig.48	P

#### For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.49	P
	30 MHz ~ 1 GHz	Fig.50	P
	1 GHz ~ 3 GHz	Fig.51	P
	3 GHz ~ 10 GHz	Fig.52	P
	10 GHz ~ 26 GHz	Fig.53	P

Ch 39 2441 MHz	Center Frequency	Fig.54	P
	30 MHz ~ 1 GHz	Fig.55	P
	1 GHz ~ 3 GHz	Fig.56	P
	3 GHz ~ 10 GHz	Fig.57	P
	10 GHz ~ 26 GHz	Fig.58	P
Ch 78 2480 MHz	Center Frequency	Fig.59	P
	30 MHz ~ 1 GHz	Fig.60	P
	1 GHz ~ 3 GHz	Fig.61	P
	3 GHz ~ 10 GHz	Fig.62	P
	10 GHz ~ 26 GHz	Fig.63	P

**Conclusion: PASS**

**Test graphs as below**

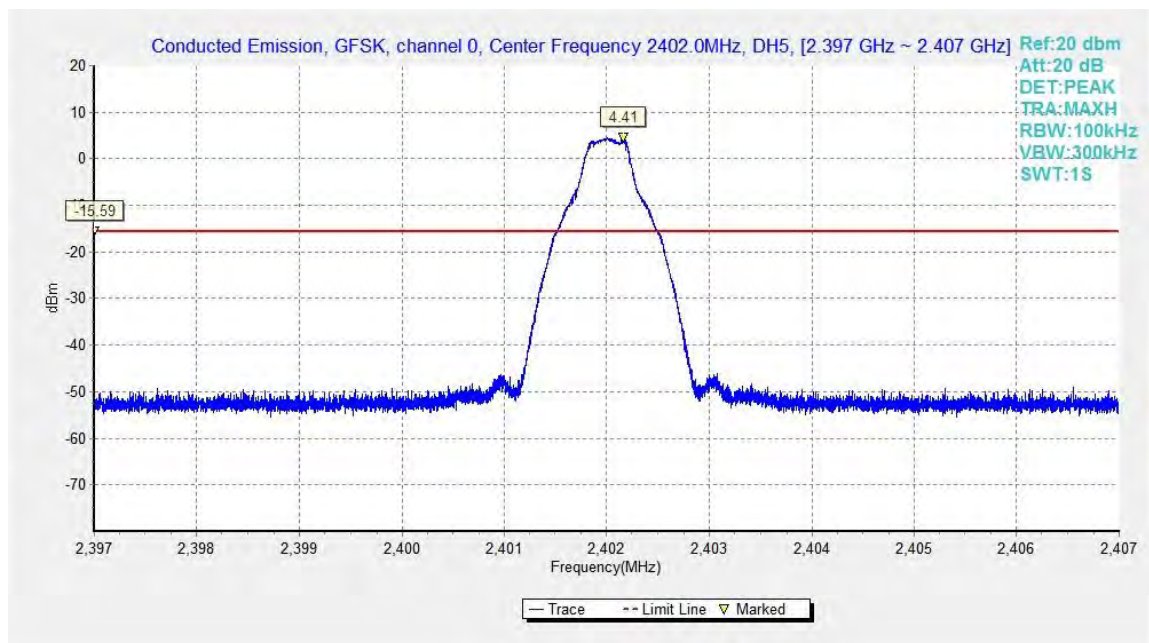


Fig.19. Conducted spurious emission: GFSK, Channel 0,2402MHz



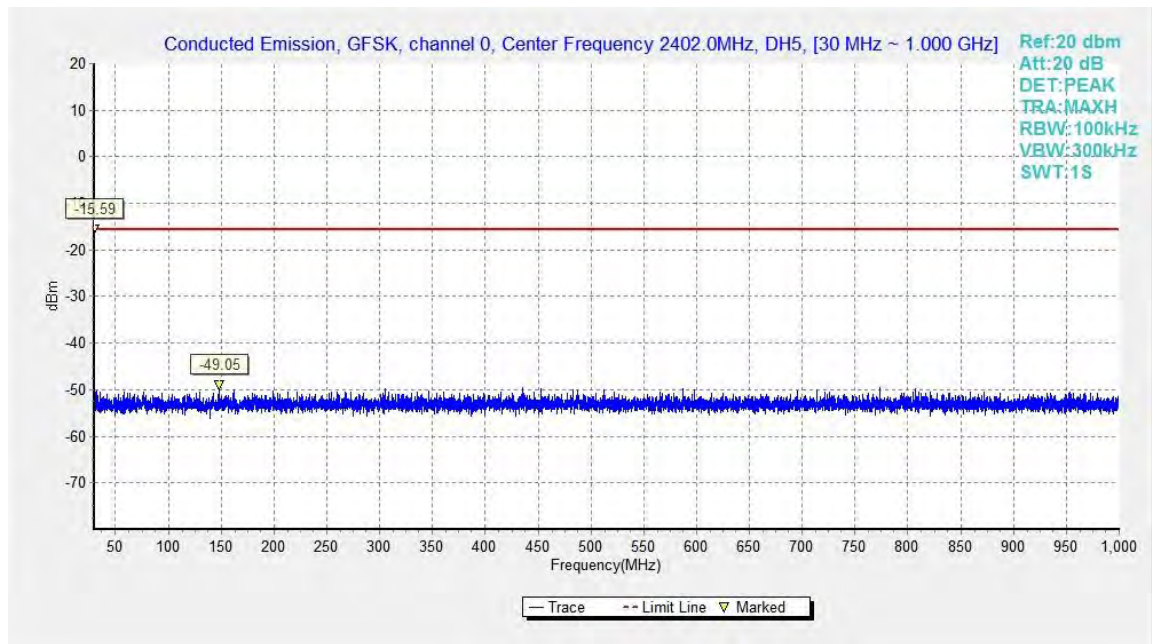


Fig.20. Conducted spurious emission: GFSK, Channel 0, 30MHz - 1GHz

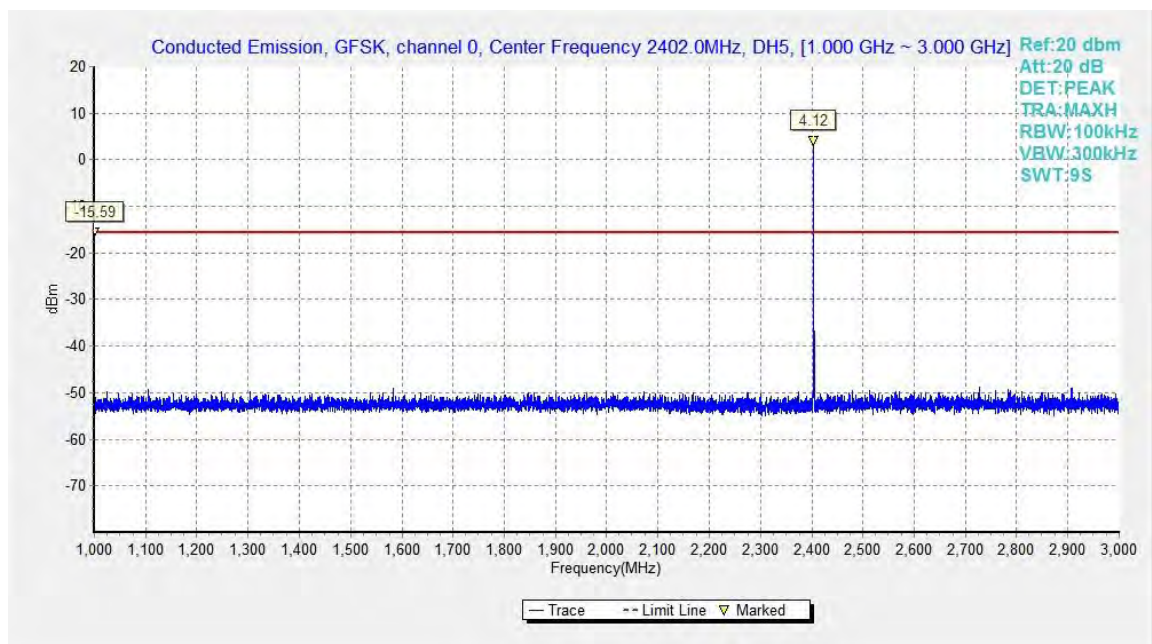


Fig.21. Conducted spurious emission: GFSK, Channel 0, 1GHz - 3GHz



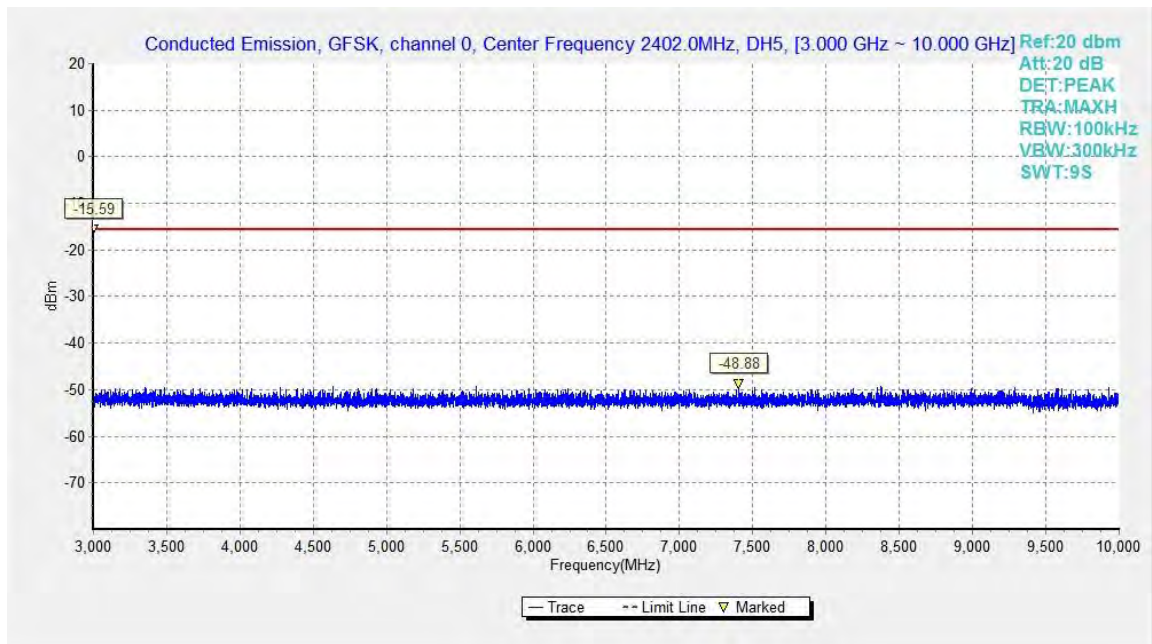


Fig.22. Conducted spurious emission: GFSK, Channel 0, 3GHz - 10GHz

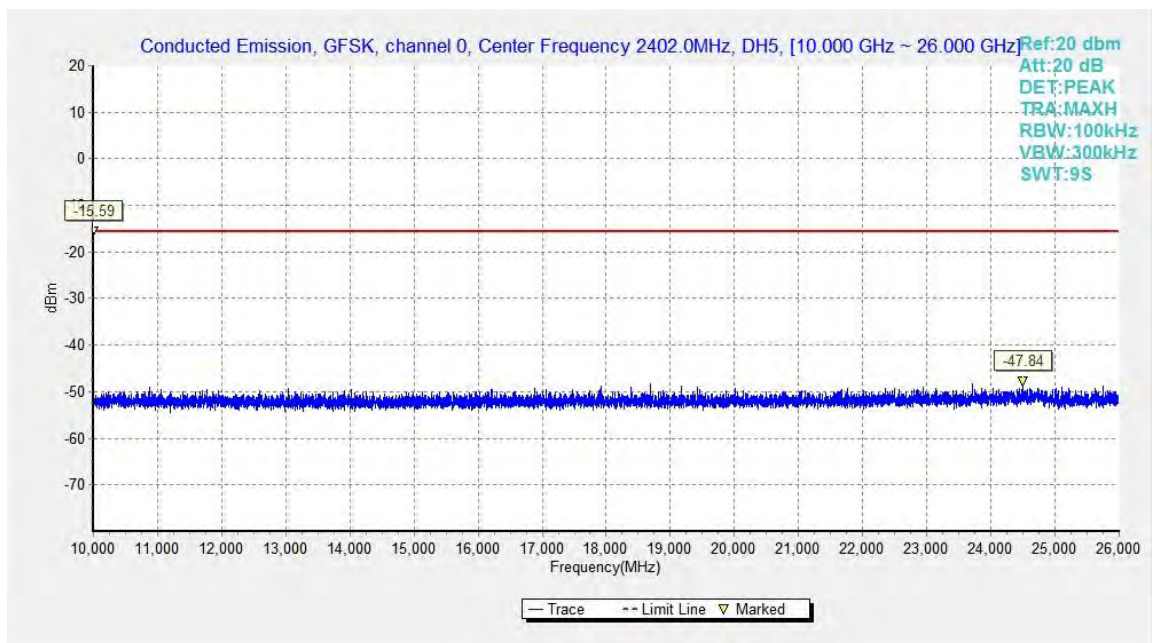


Fig.23. Conducted spurious emission: GFSK, Channel 0, 10GHz - 26GHz

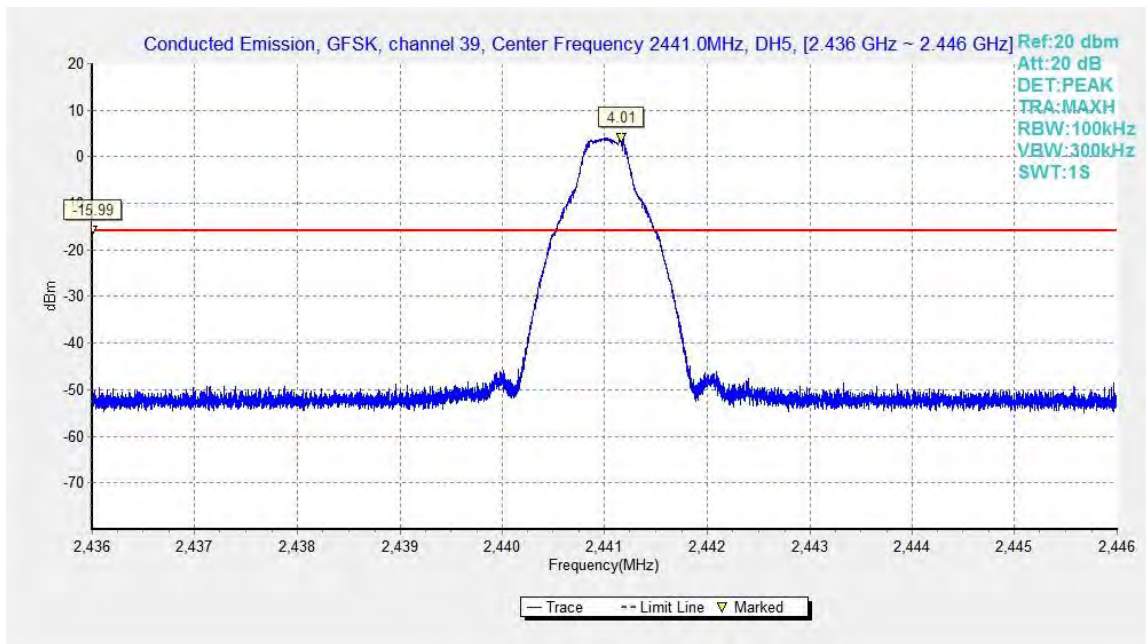


Fig.24. Conducted spurious emission: GFSK, Channel 39, 2441MHz

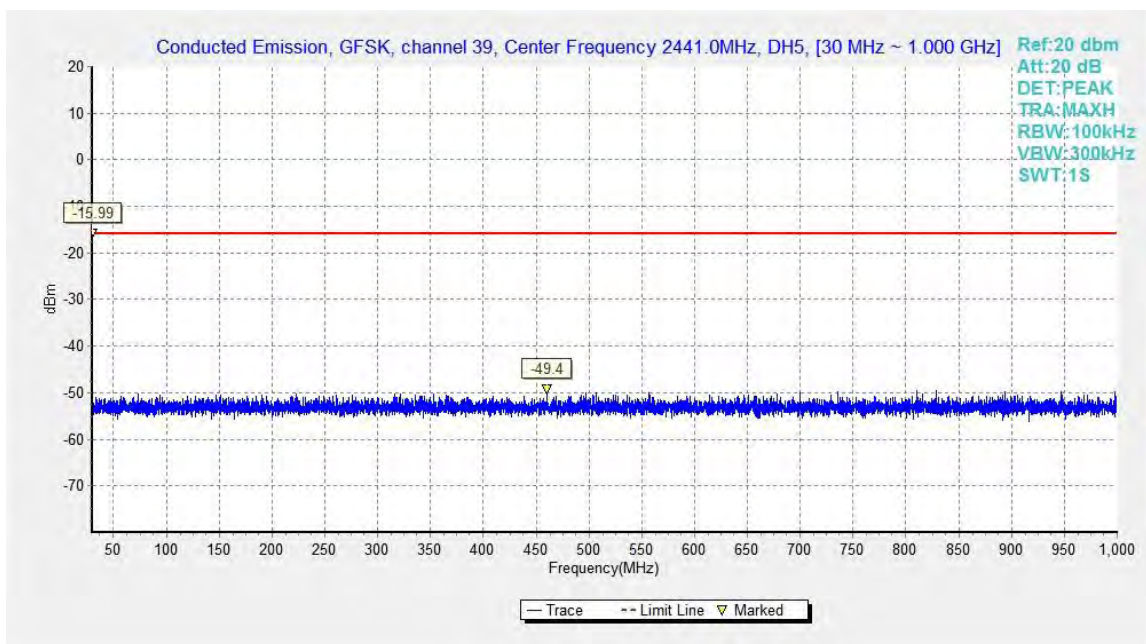


Fig.25. Conducted spurious emission: GFSK, Channel 39, 30MHz - 1GHz



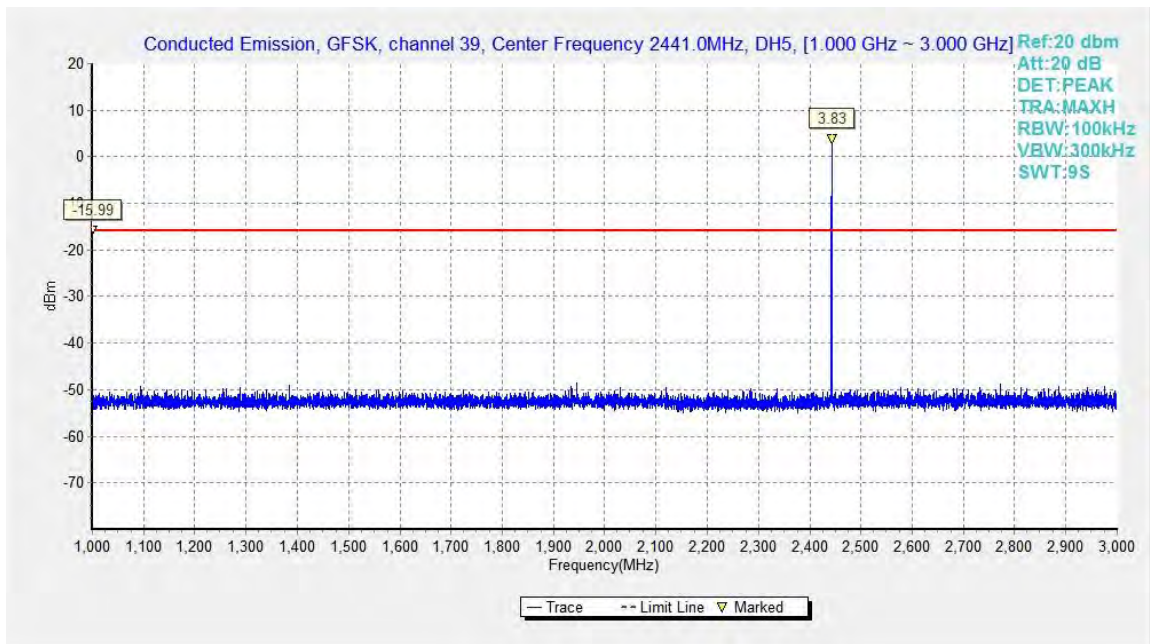


Fig.26. Conducted spurious emission: GFSK, Channel 39, 1GHz – 3GHz

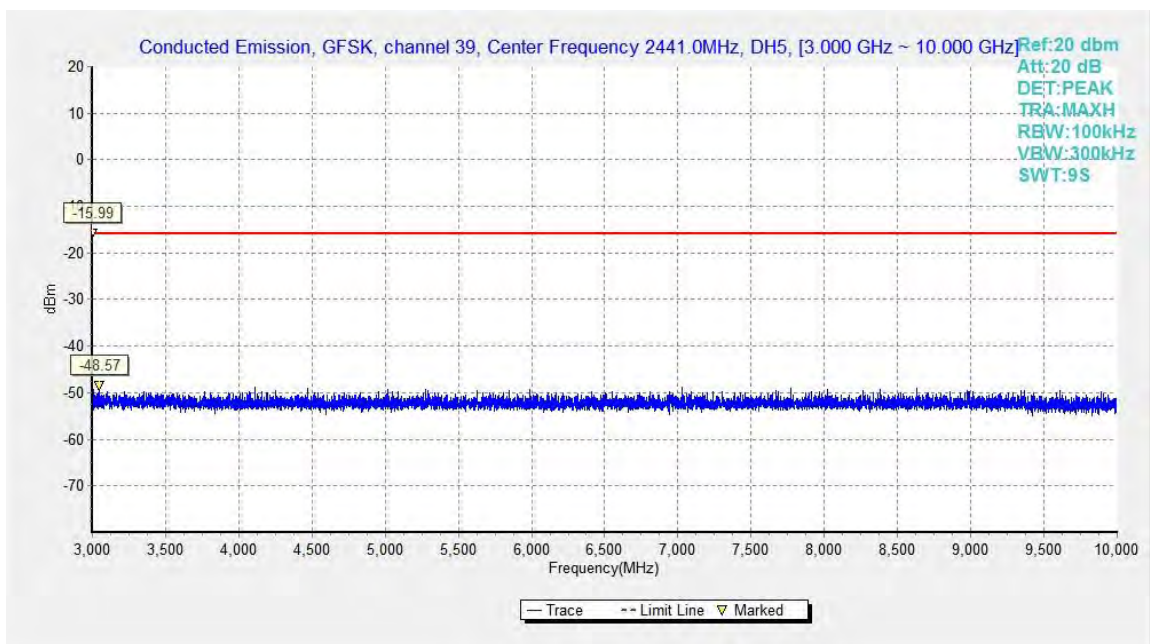


Fig.27. Conducted spurious emission: GFSK, Channel 39, 3GHz – 10GHz

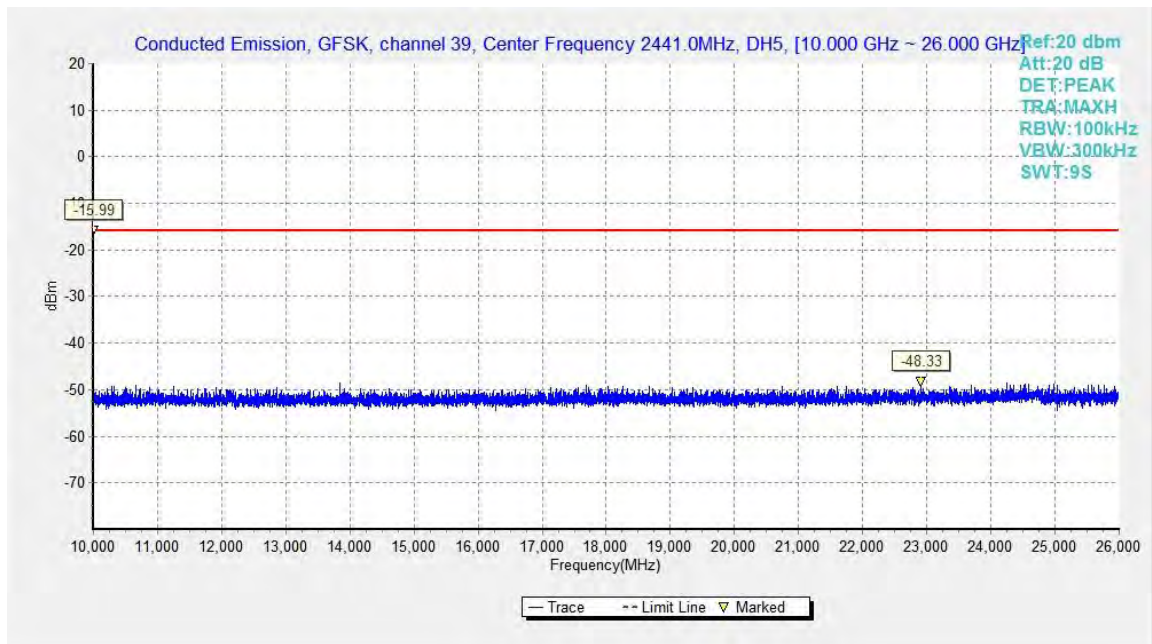


Fig.28. Conducted spurious emission: GFSK, Channel 39, 10GHz – 26GHz

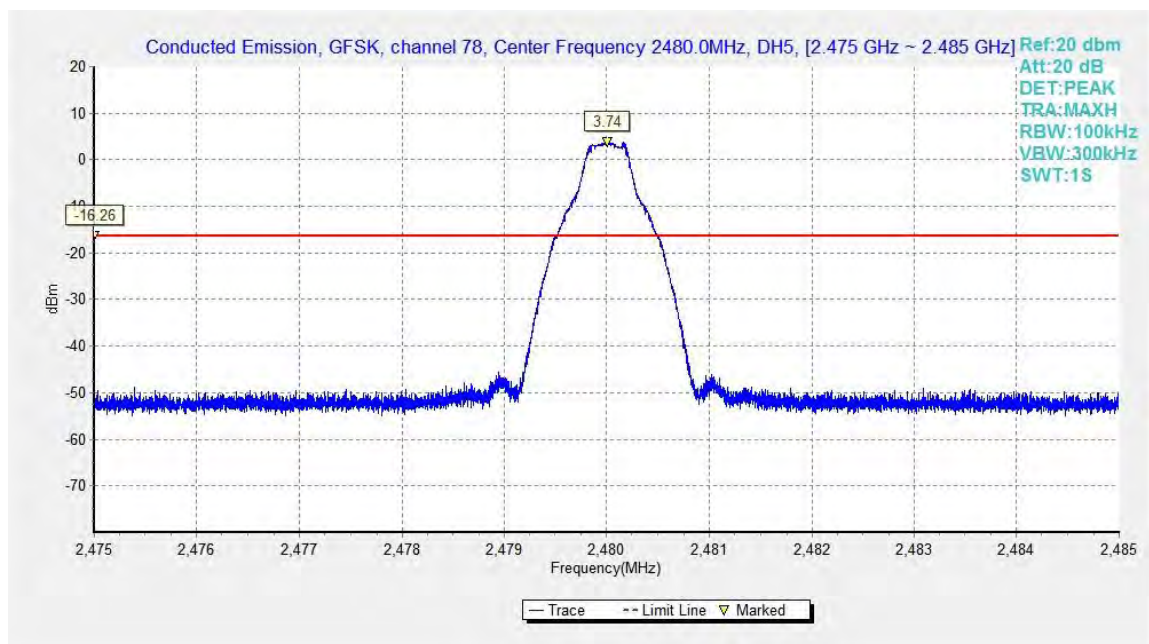


Fig.29. Conducted spurious emission: GFSK, Channel 78, 2480MHz



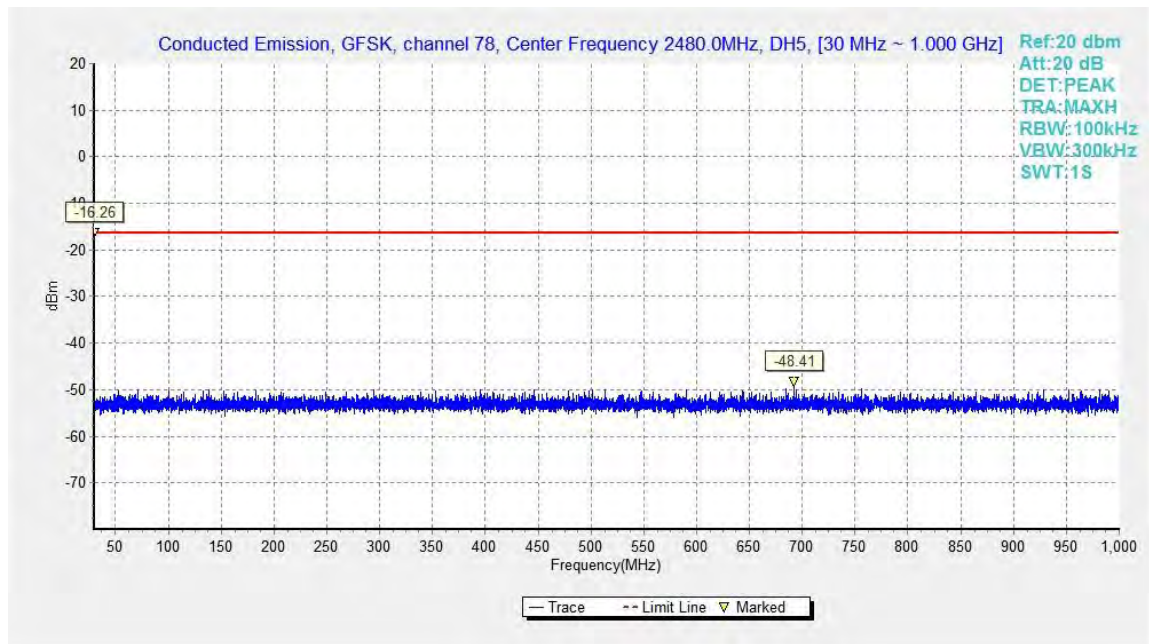


Fig.30. Conducted spurious emission: GFSK, Channel 78, 30MHz - 1GHz

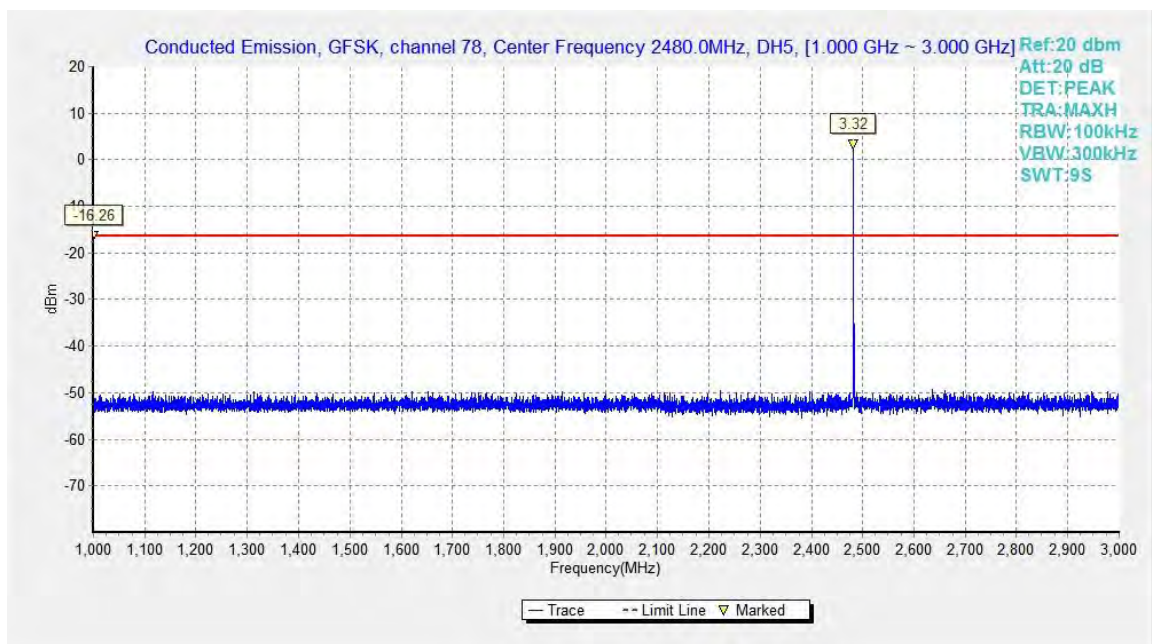


Fig.31. Conducted spurious emission: GFSK, Channel 78, 1GHz - 3GHz

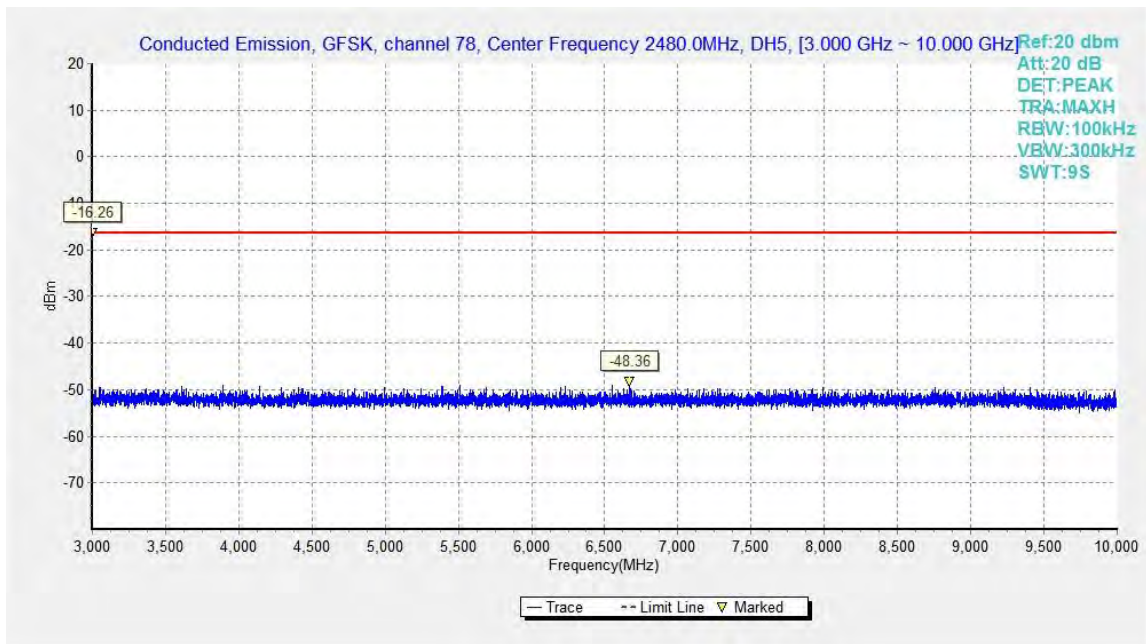


Fig.32. Conducted spurious emission: GFSK, Channel 78, 3GHz - 10GHz

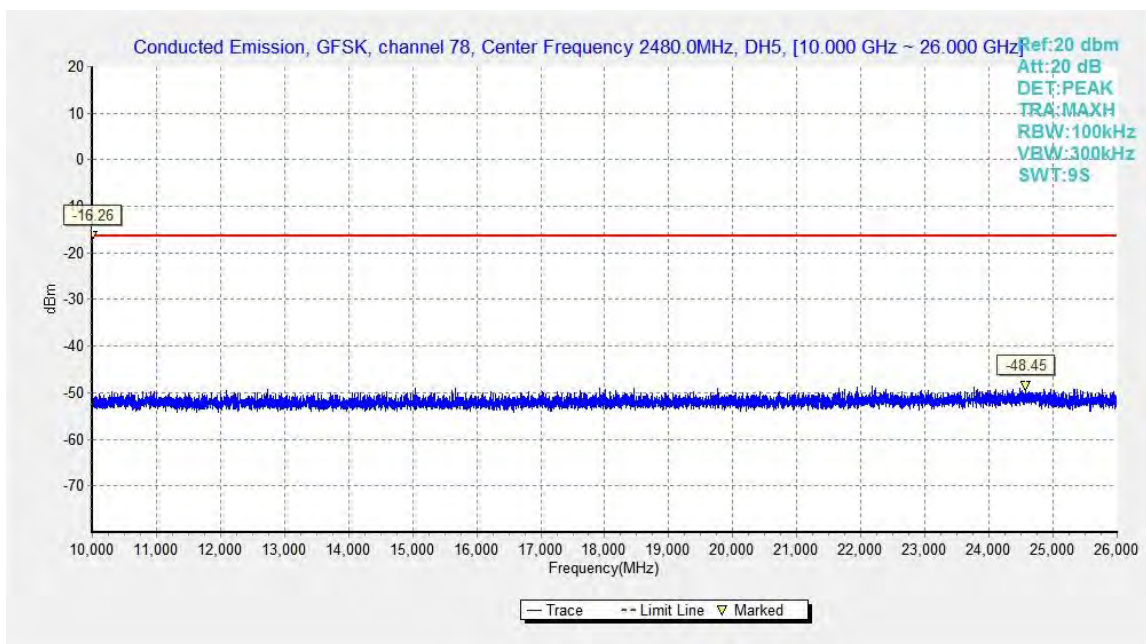


Fig.33. Conducted spurious emission: GFSK, Channel 78, 10GHz - 26GHz



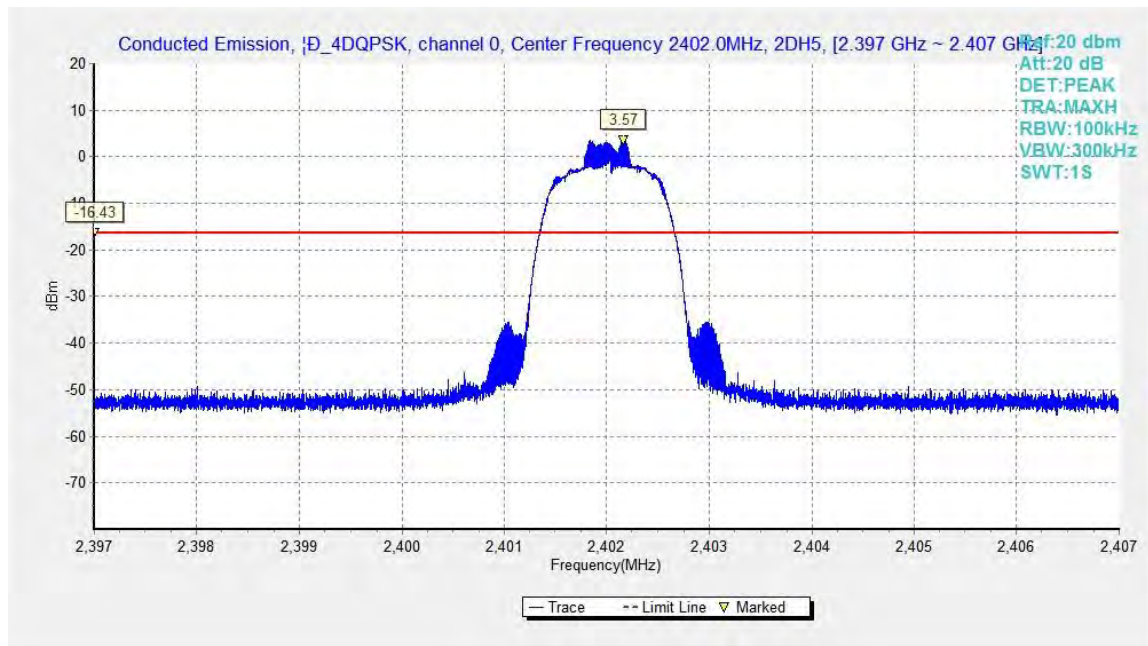


Fig.34. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 2402MHz

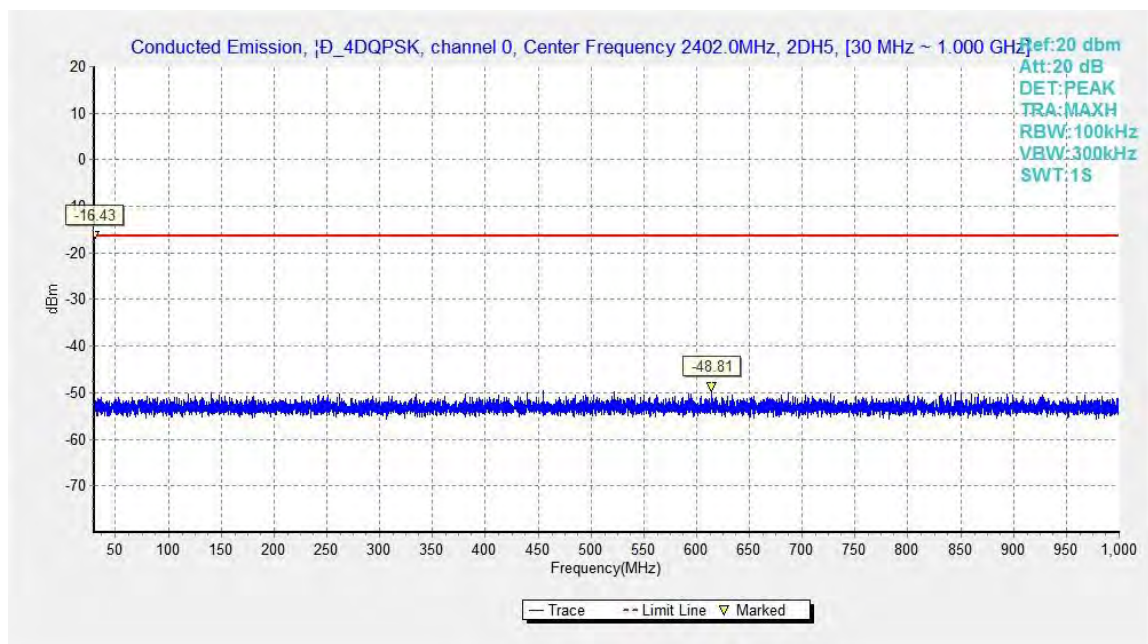


Fig.35. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 30MHz - 1GHz

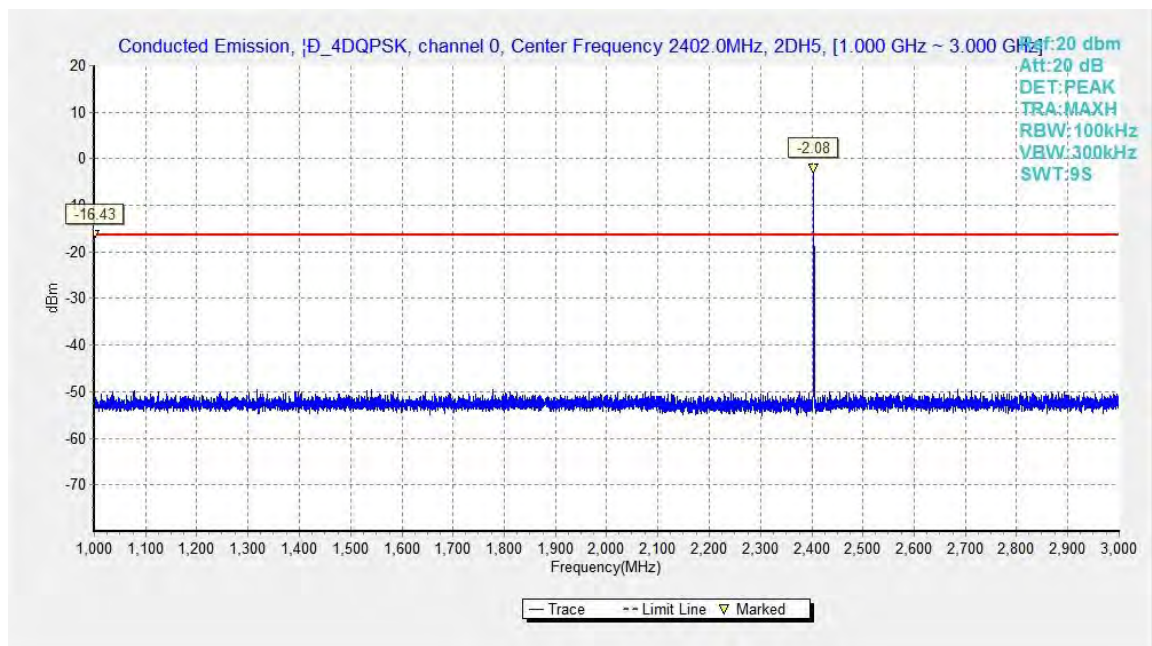


Fig.36. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 1GHz - 3GHz

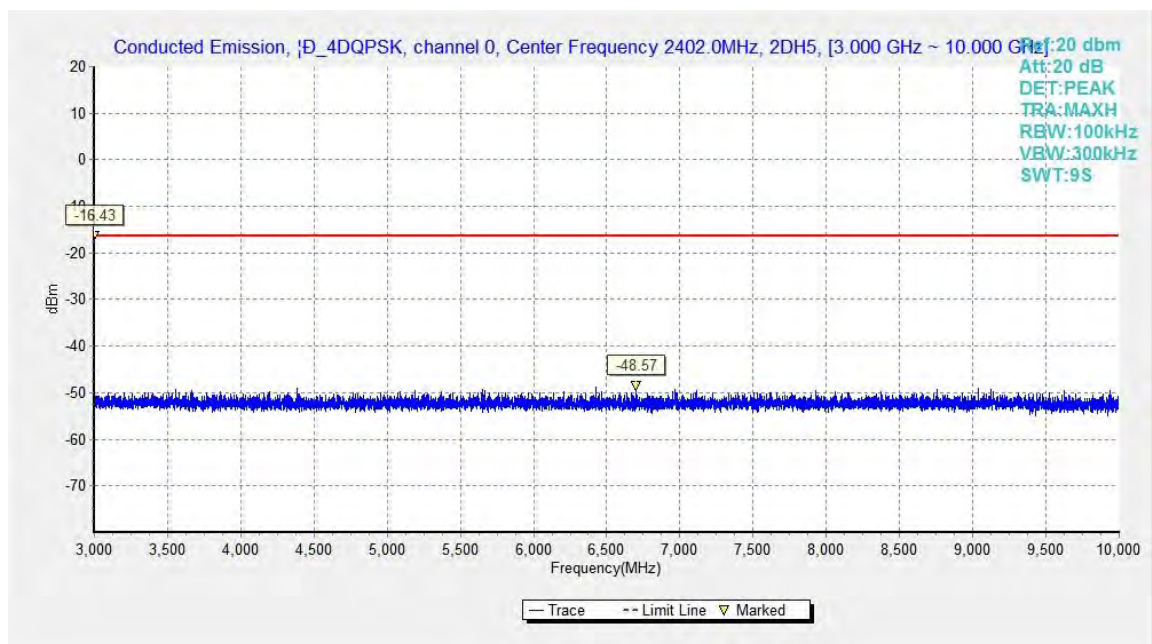


Fig.37. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 3GHz - 10GHz



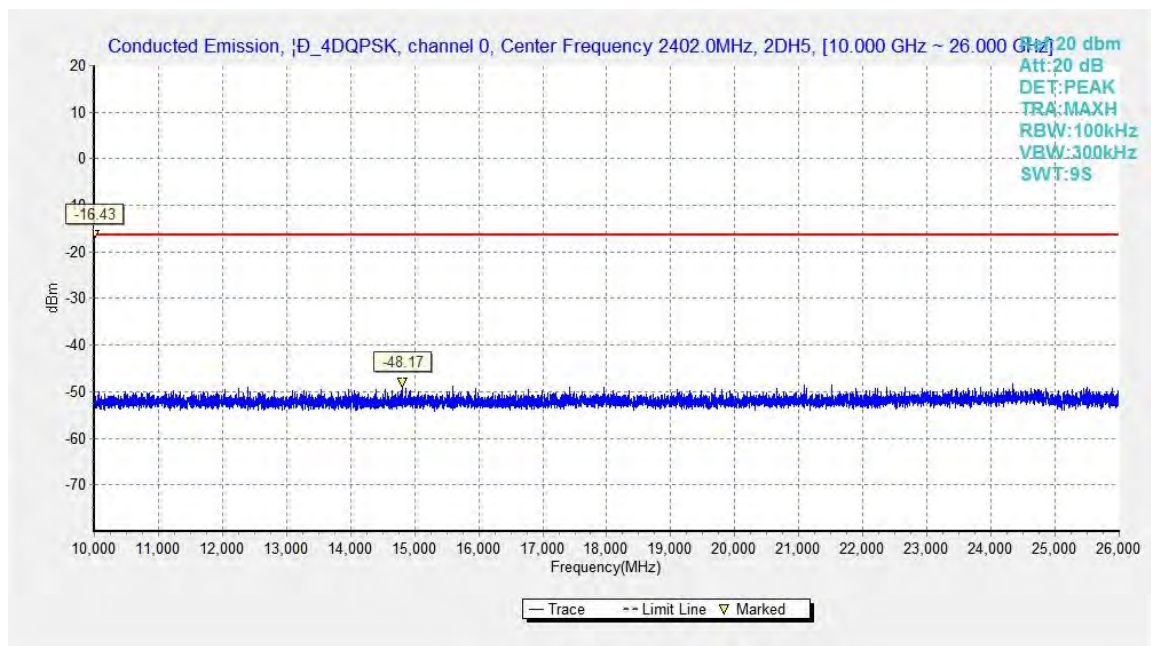


Fig.38. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 10GHz - 26GHz

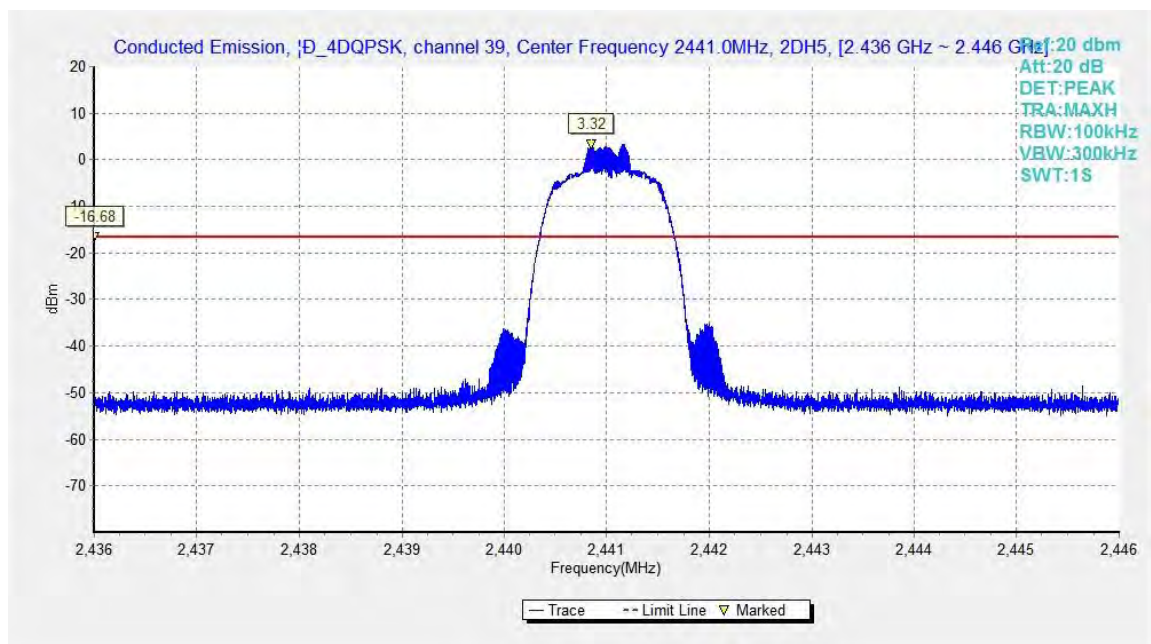


Fig.39. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 2441MHz

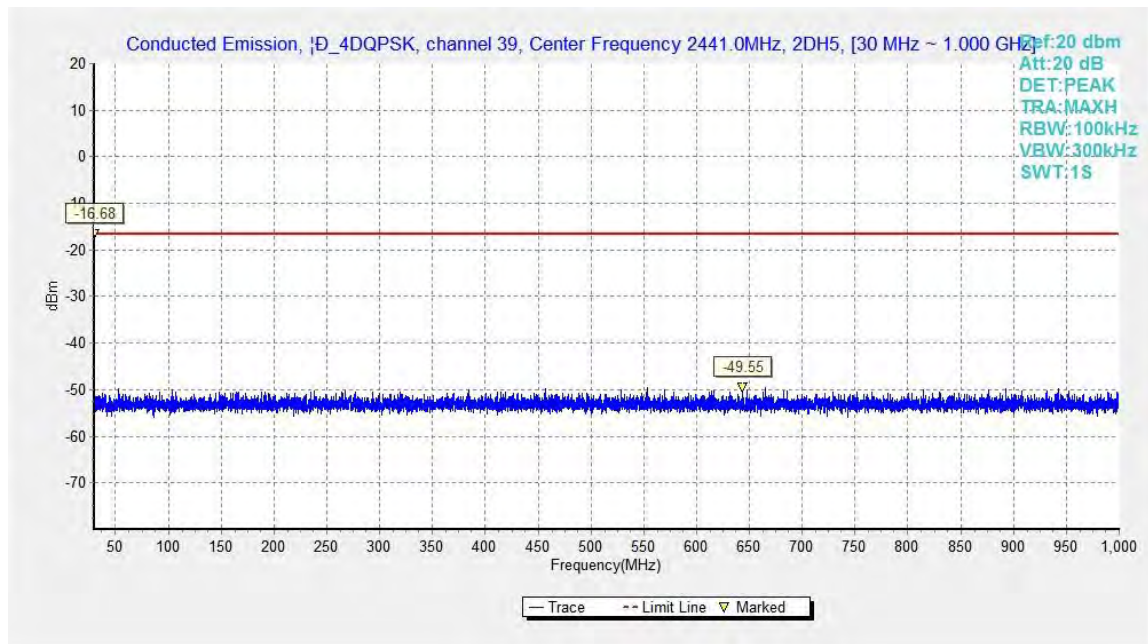


Fig.40. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 30MHz - 1GHz

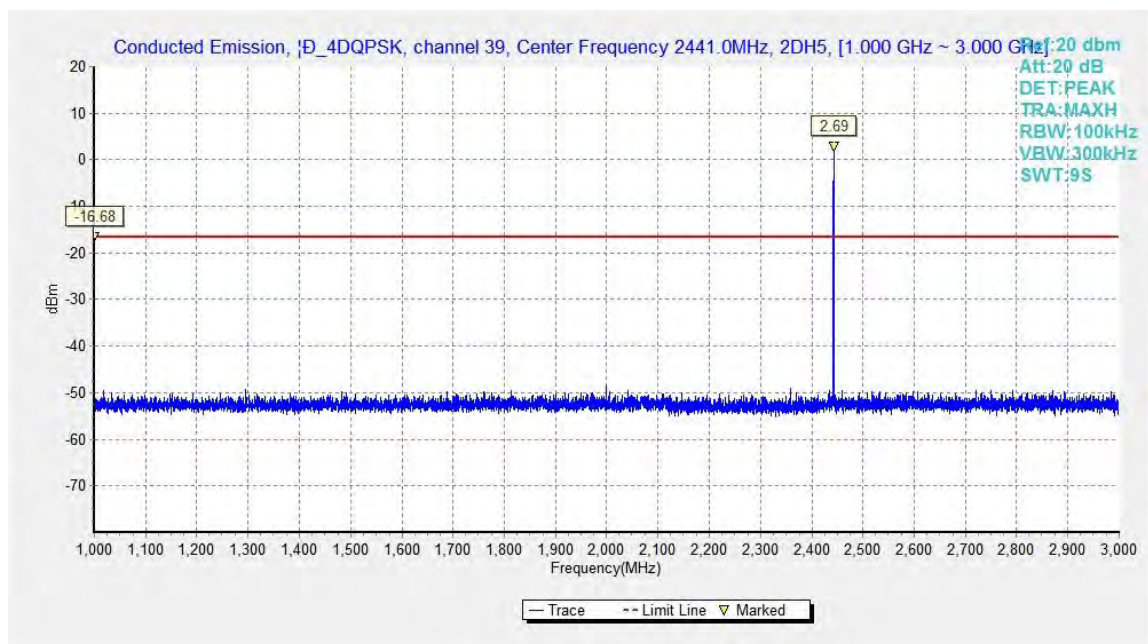


Fig.41. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 1GHz - 3GHz



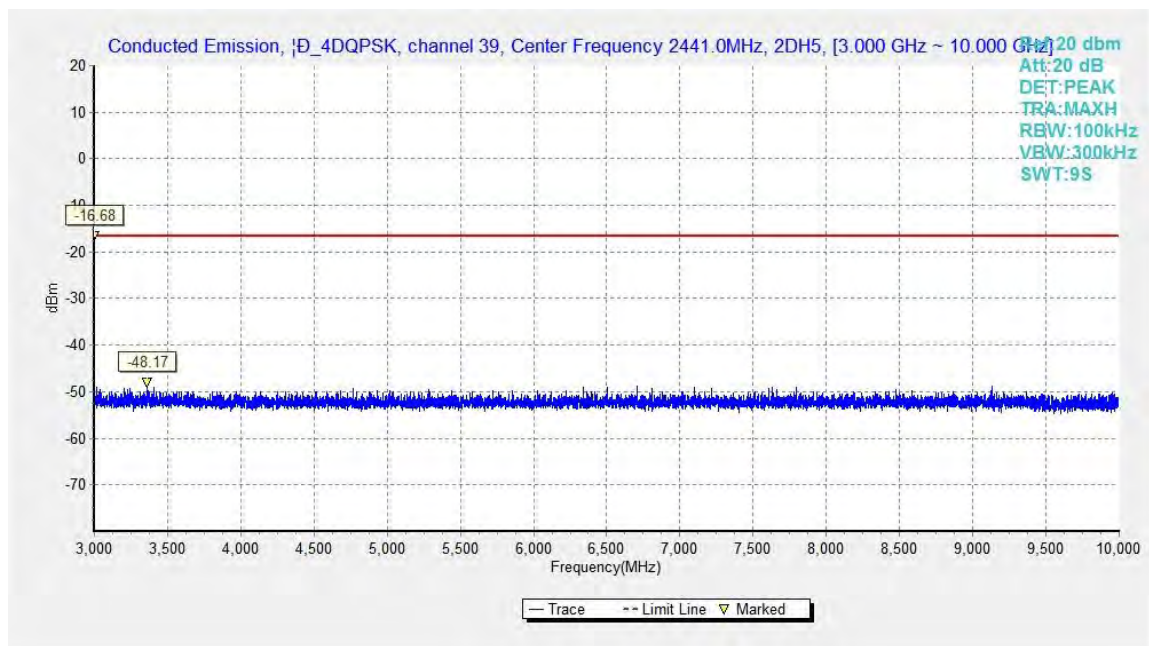


Fig.42. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 3GHz - 10GHz

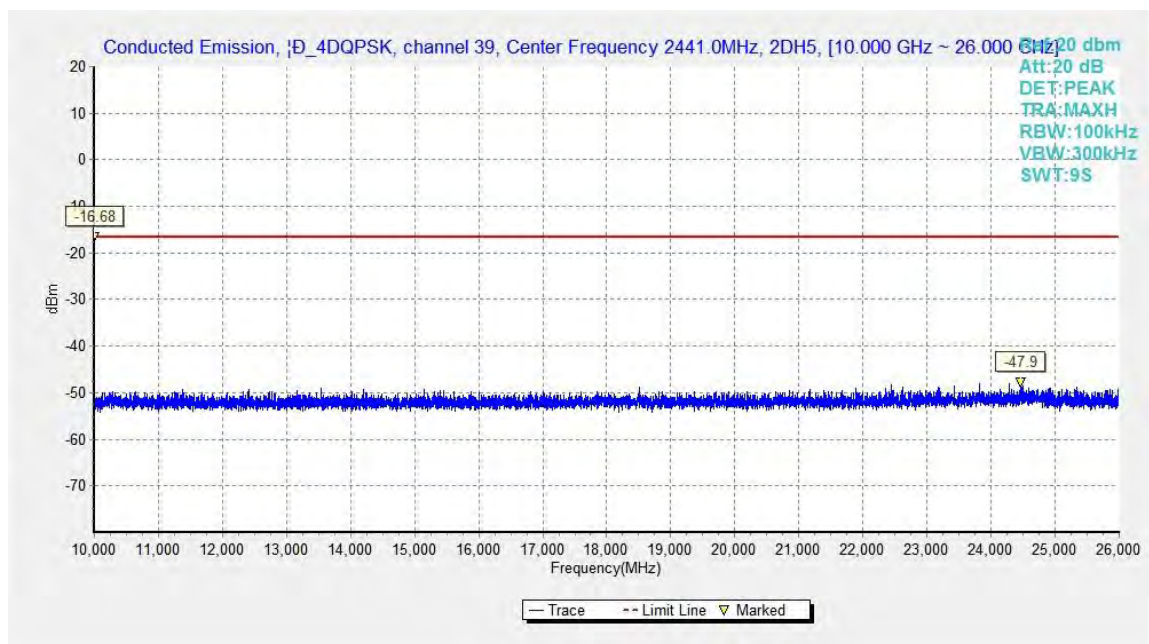


Fig.43. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 10GHz – 26GHz

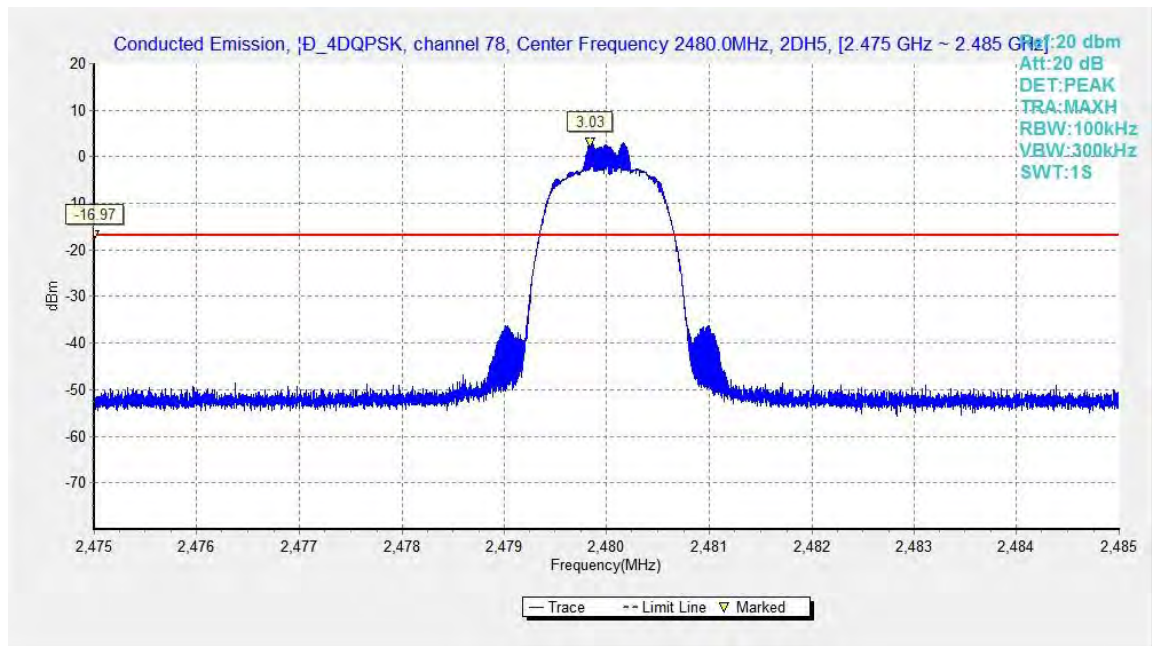


Fig.44. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 2480MHz

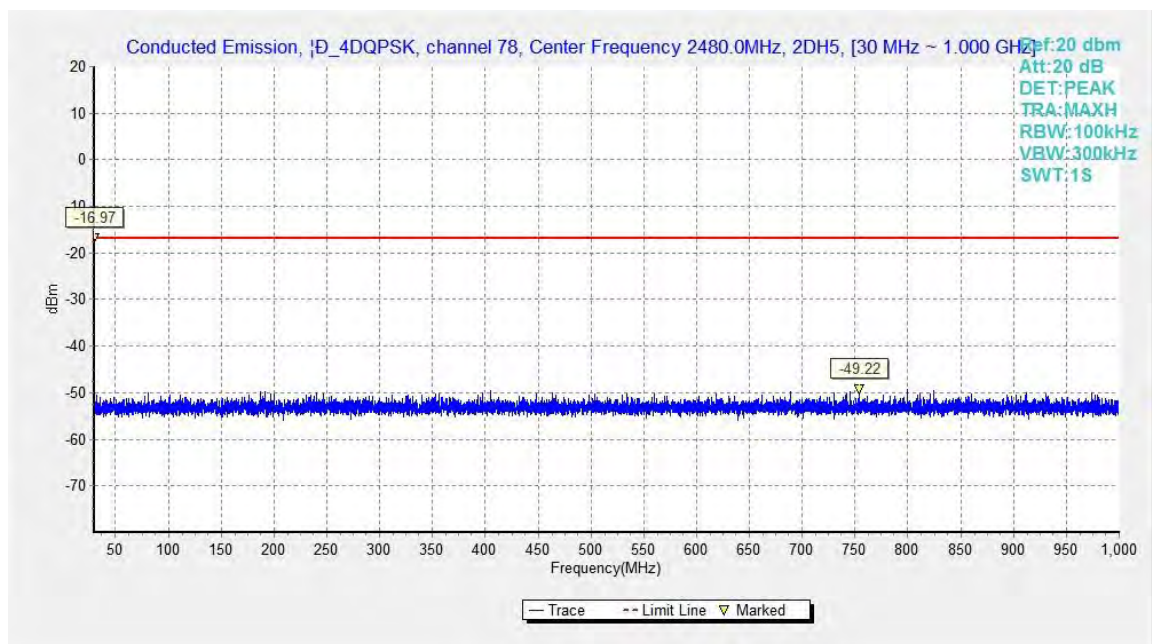


Fig.45. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 30MHz - 1GHz



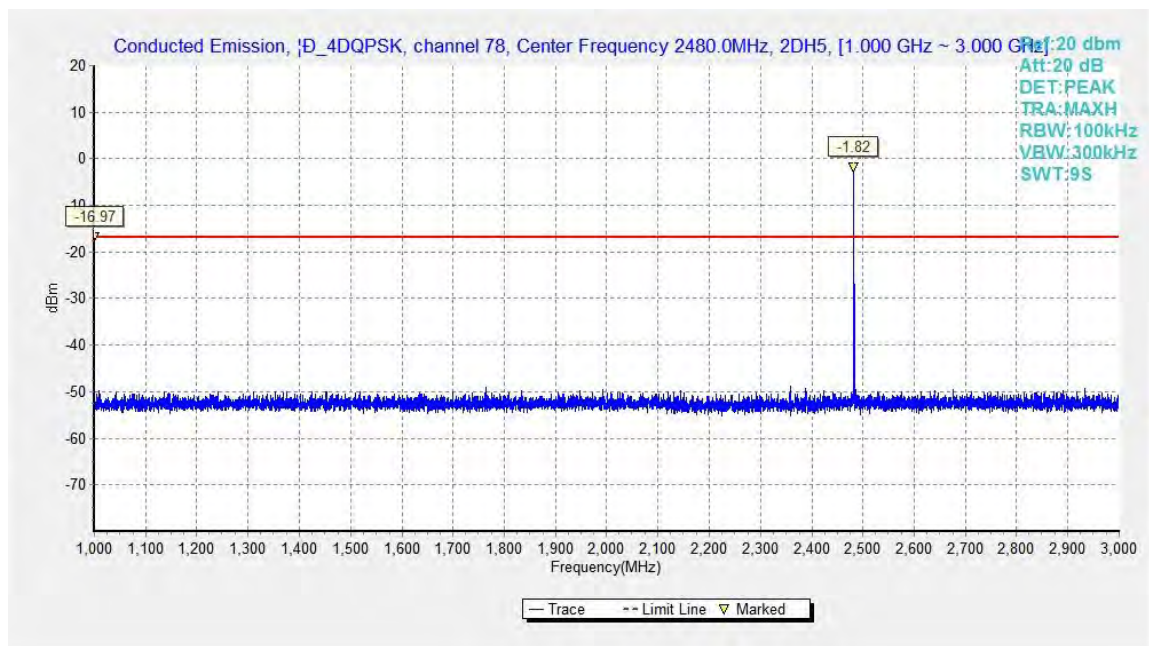


Fig.46. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 1GHz - 3GHz

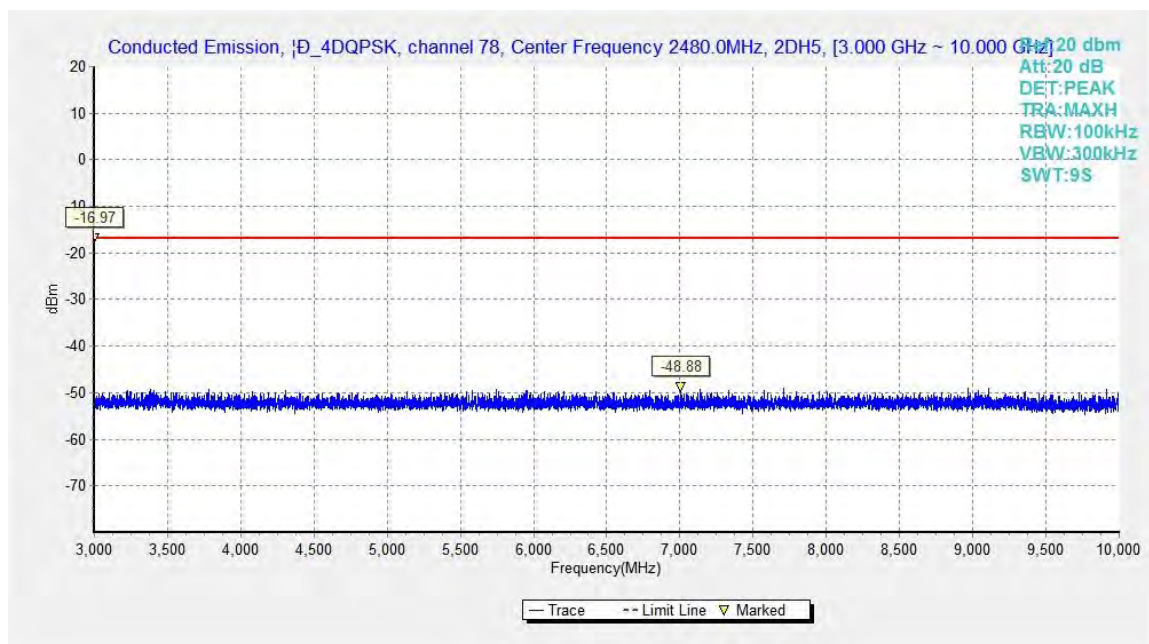


Fig.47. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 3GHz - 10GHz

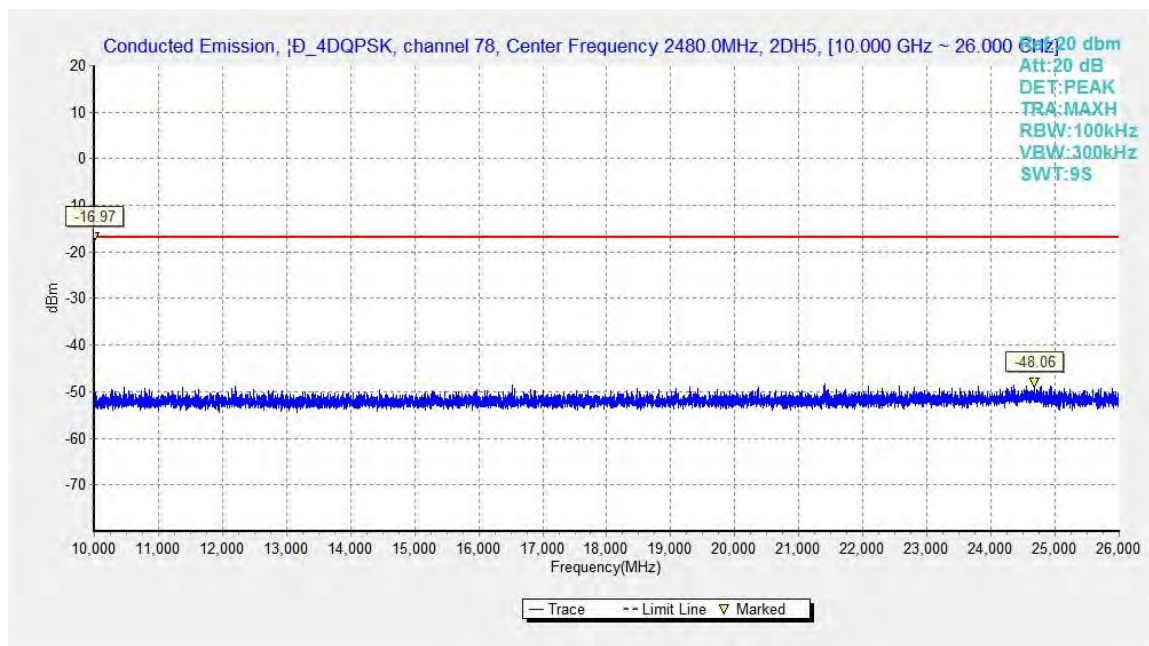


Fig.48. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 10GHz - 26GHz

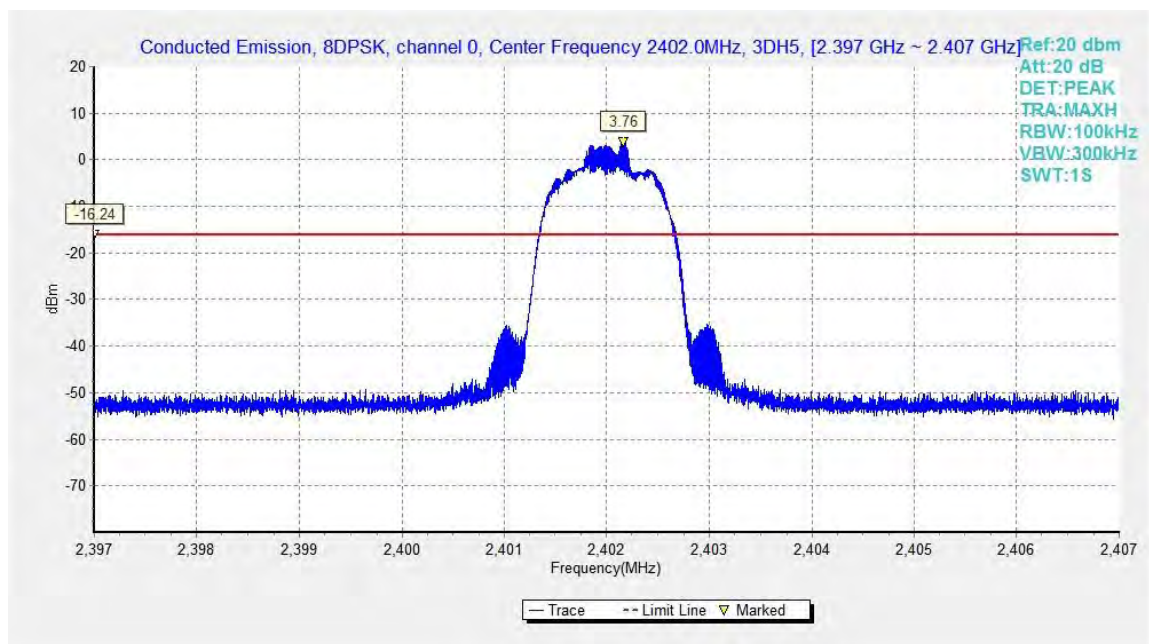


Fig.49. Conducted spurious emission: 8DPSK, Channel 0, 2,402MHz



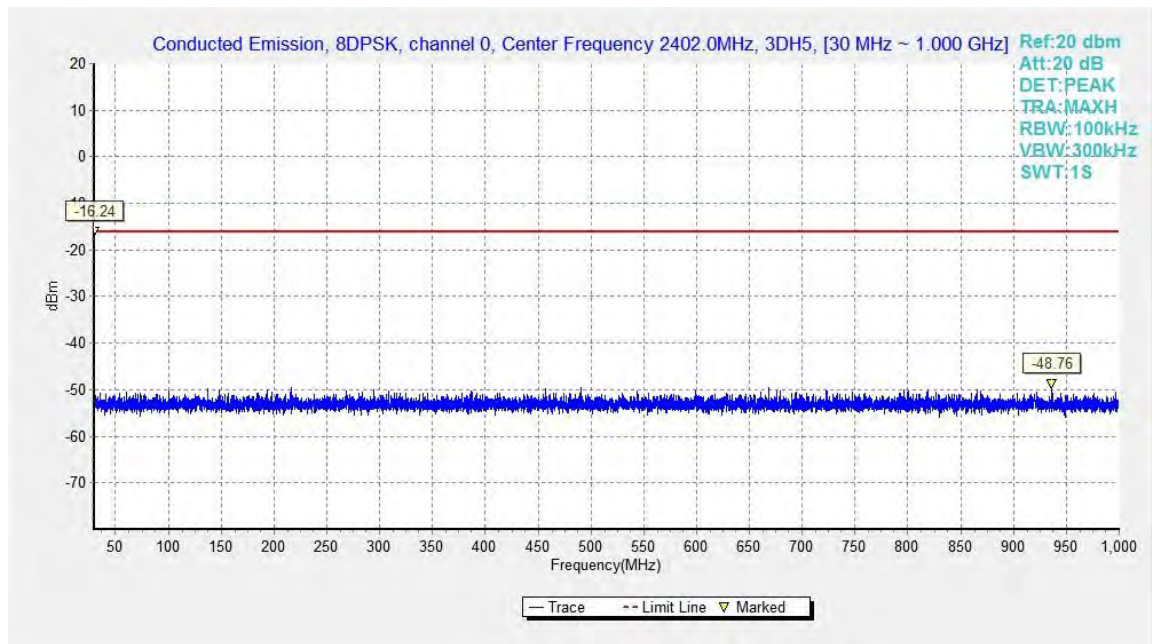


Fig.50. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

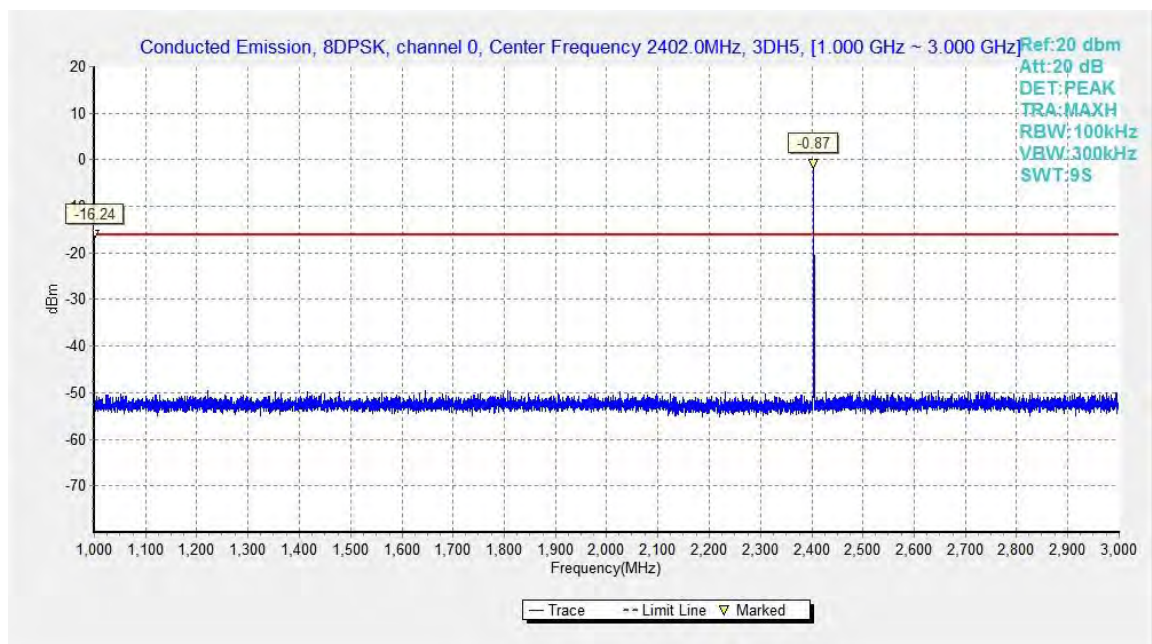


Fig.51. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz

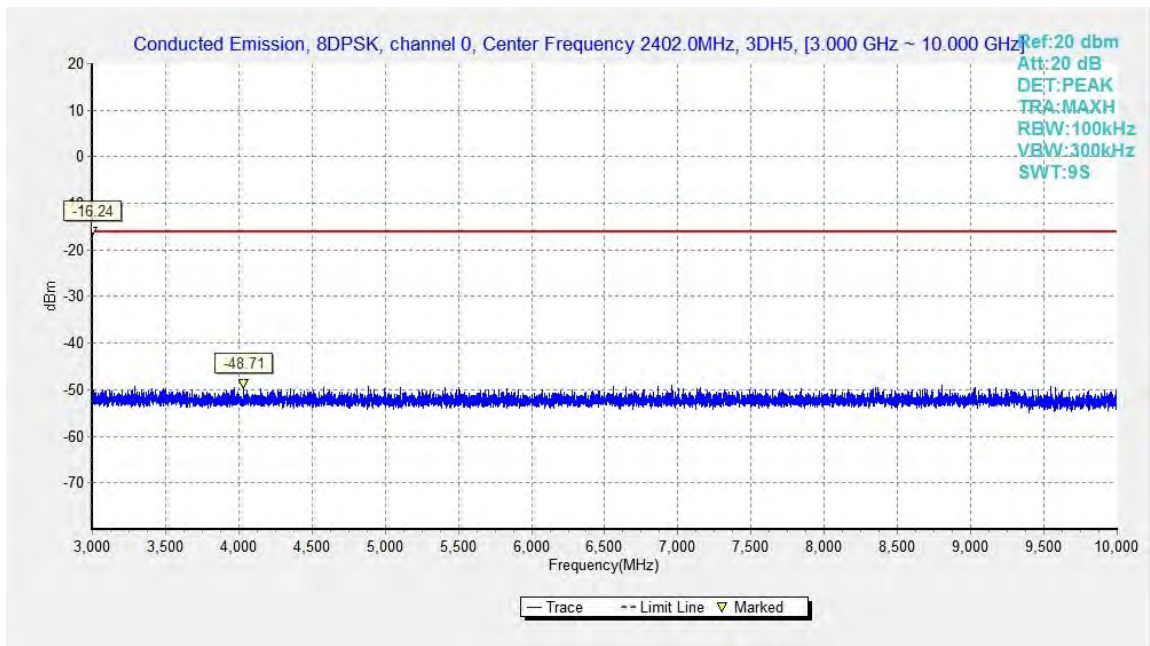


Fig.52. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

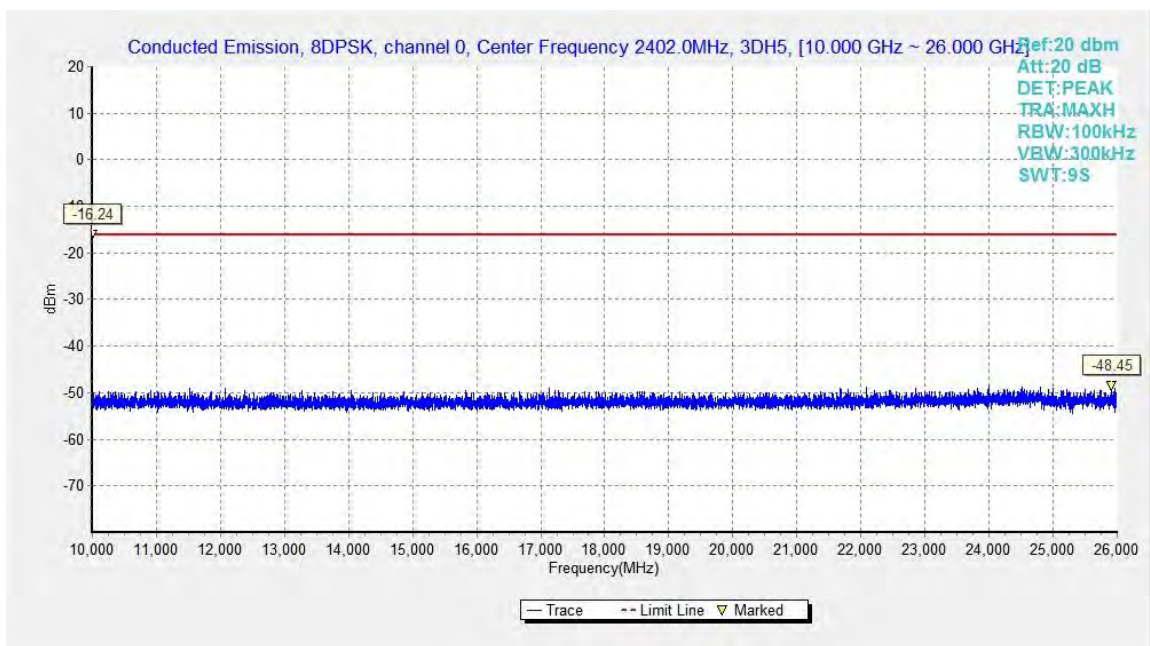


Fig.53. Conducted spurious emission: 8DPSK, Channel 0, 10GHz - 26GHz



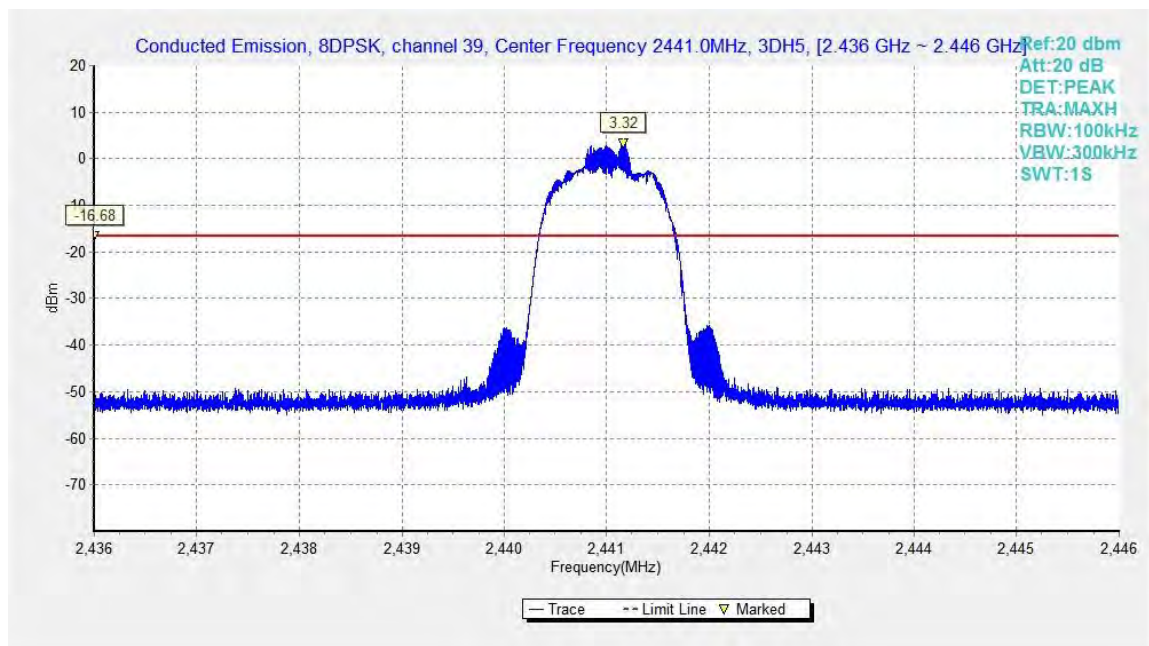


Fig.54. Conducted spurious emission: 8DPSK, Channel 39, 2441MHz

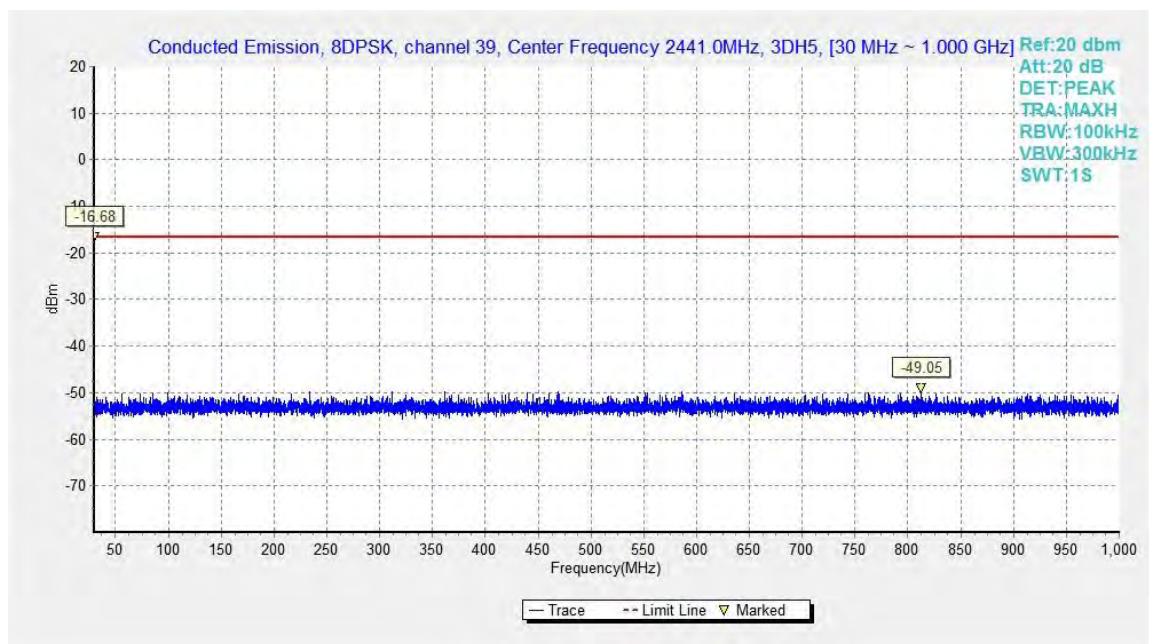


Fig.55. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz

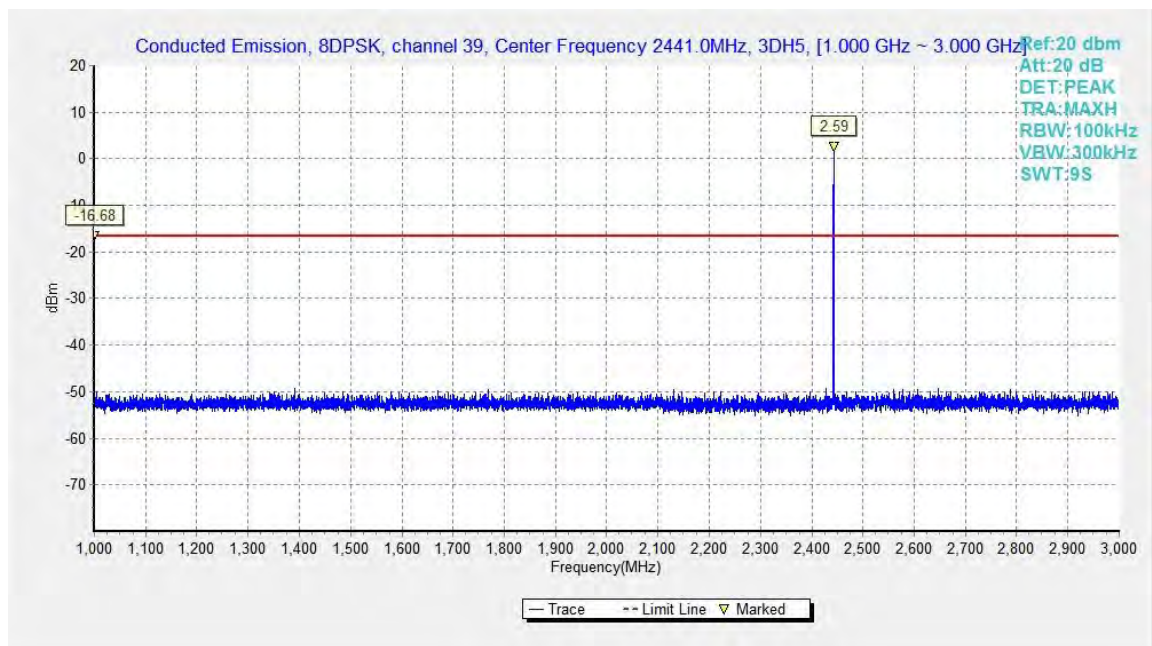


Fig.56. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

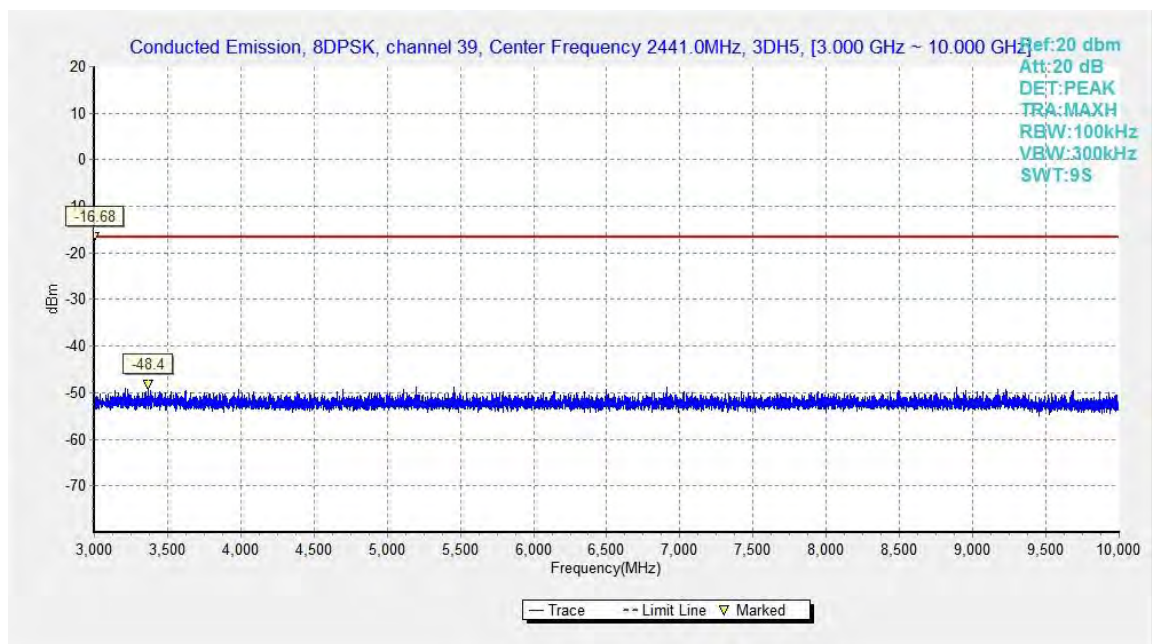


Fig.57. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz



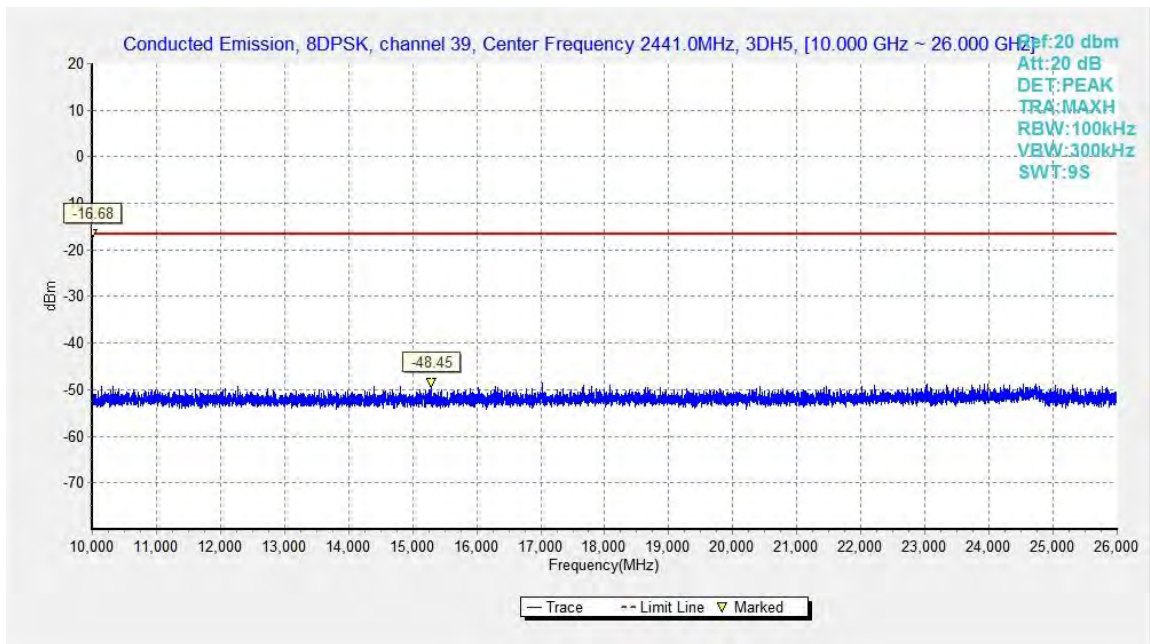


Fig.58. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

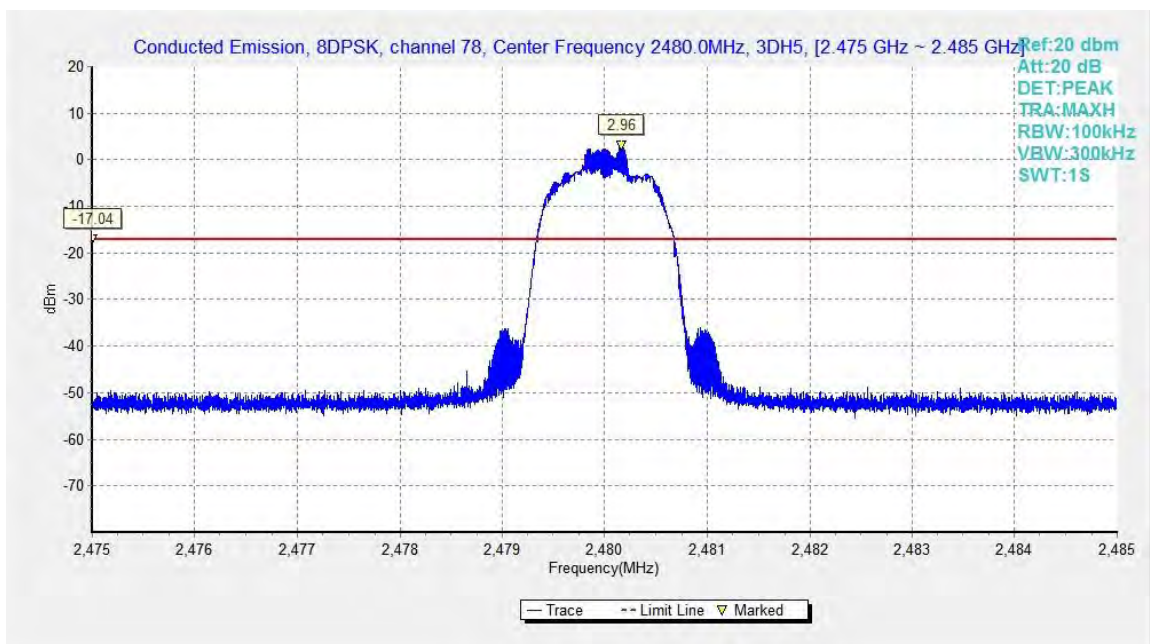


Fig.59. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

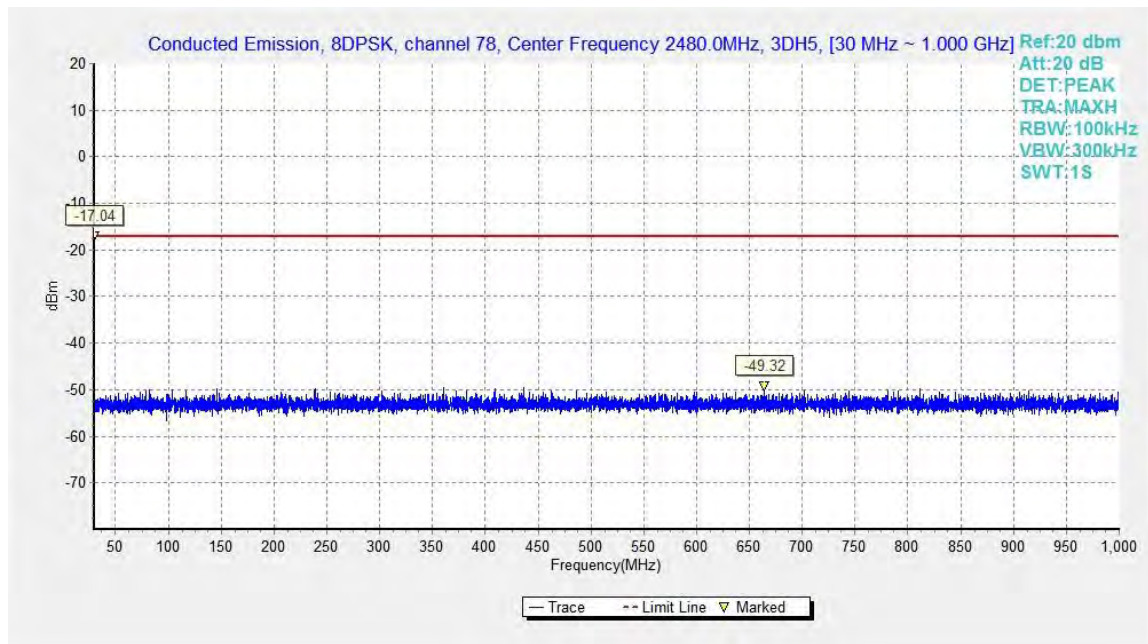


Fig.60. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

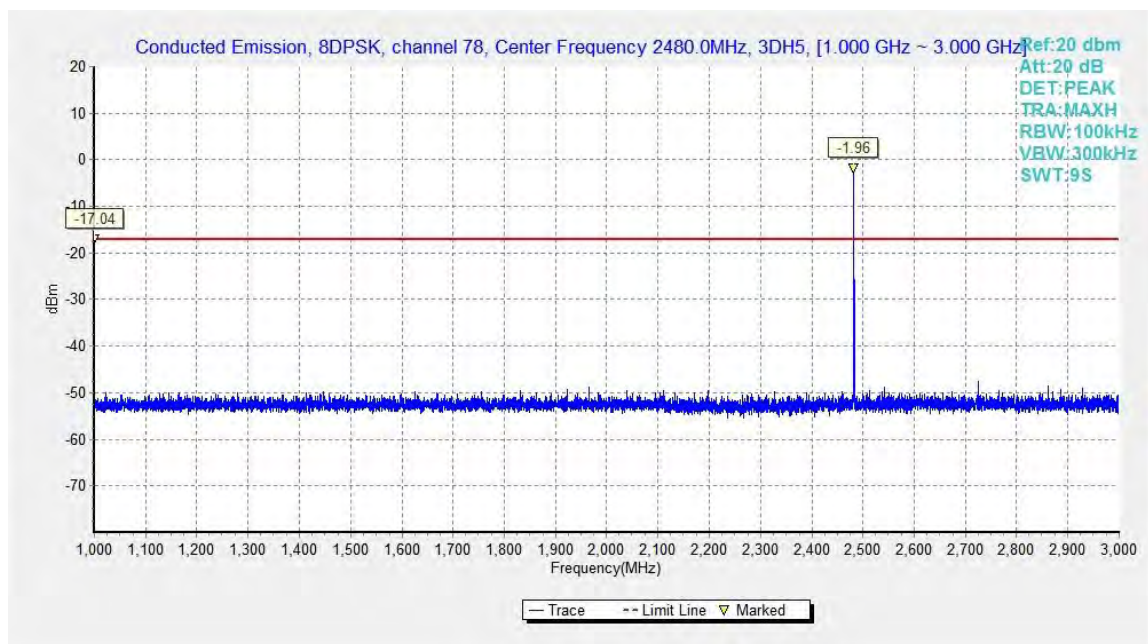


Fig.61. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz



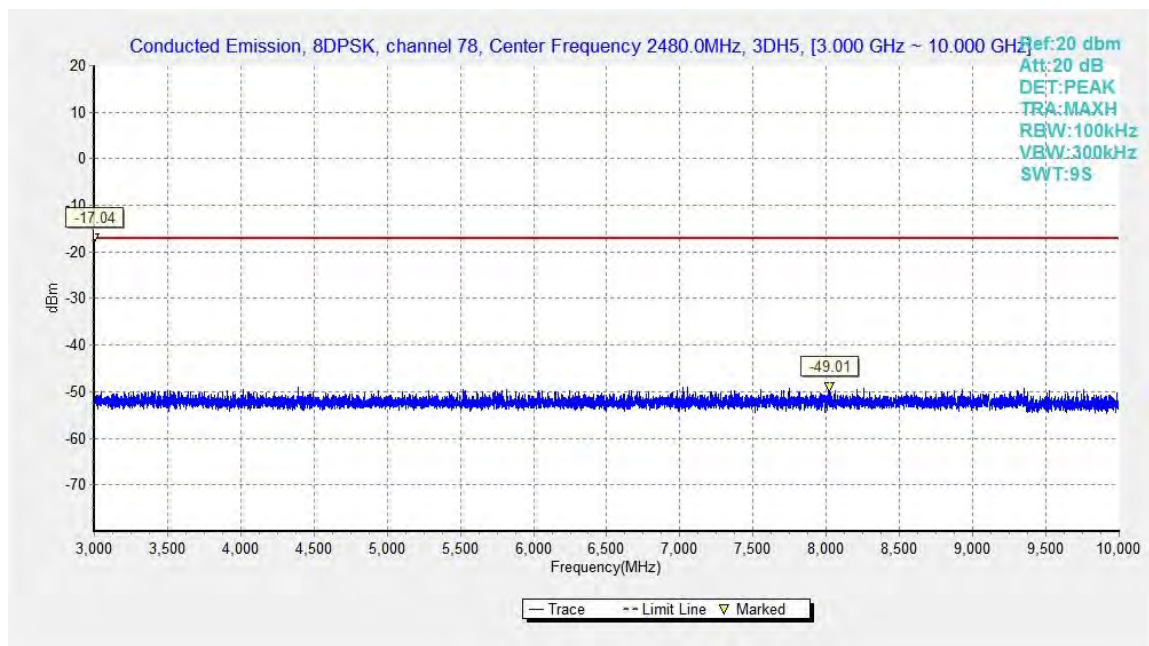


Fig.62. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

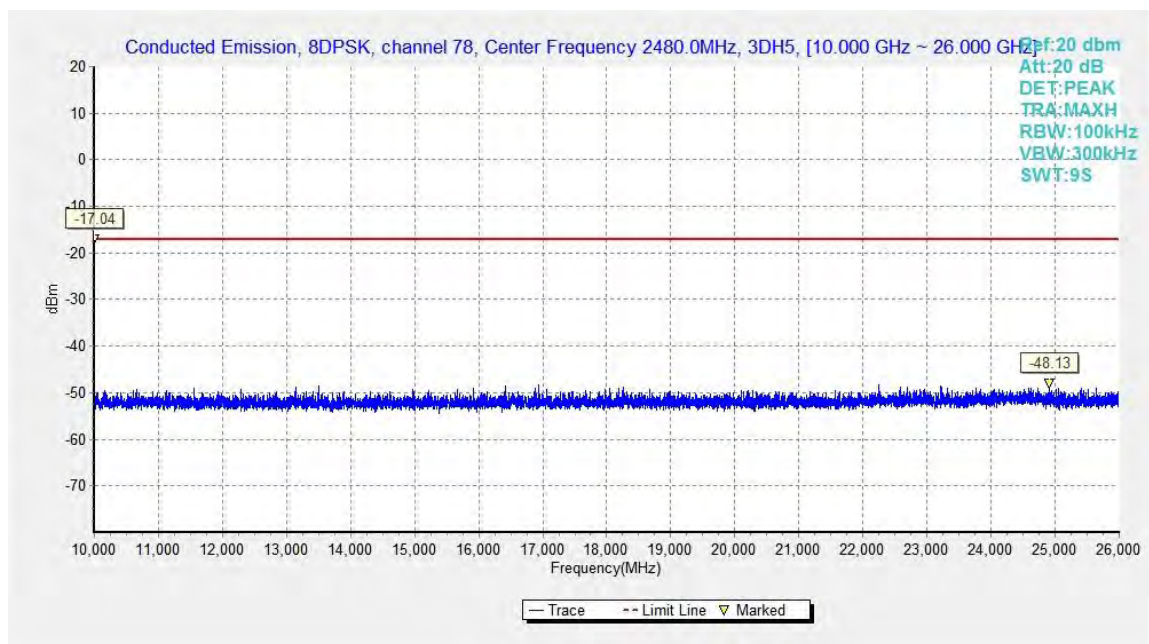


Fig.63. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

## B.6. Transmitter Spurious Emission - Radiated

**Method of Measurement:** See ANSI C63.10-clause 6.4 & 6.5 & 6.6

**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Limit in restricted band:**

Frequency (MHz)	Field strength(μV/m)	Measurement distance(m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

**Set up:**

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The EUT and transmitting antenna shall be centered on the turntable.

**Note:**

1. A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= $P_{Mea}+A_{Rpl}= P_{Mea}+Cable\ Loss+Antenna\ Factor$

2. The range of evaluated frequency is from 9 kHz to 26GHz. Measurement value showed here only up to 6 maximum emissions noted.

### Peak Measurement results

#### GFSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2385.970	60.89	4.60	27.47	28.81	74.00	13.11	V
2389.460	60.37	4.61	27.48	28.27	74.00	13.63	H
4804.000	44.89	-35.05	33.98	45.96	74.00	29.11	V
7206.000	44.08	-33.04	35.52	41.60	74.00	29.92	H
9607.000	45.58	-32.21	36.31	41.47	74.00	28.42	H
12010.000	47.33	-30.19	38.80	38.71	74.00	26.67	H

#### GFSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2359.400	45.03	-35.79	31.31	49.51	74.00	28.97	V
2515.000	46.12	-36.01	32.46	49.67	74.00	27.88	V
4881.500	45.95	-34.38	33.83	46.50	74.00	28.05	V
7323.000	43.71	-33.03	35.40	41.34	74.00	30.29	V
9763.000	45.39	-31.87	36.57	40.69	74.00	28.61	H
12205.500	48.65	-29.39	38.79	39.25	74.00	25.35	H

#### GFSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.865	61.84	4.65	27.80	29.39	74.00	12.16	V
2485.470	62.13	4.65	27.80	29.68	74.00	11.87	H
4959.500	45.49	-34.43	33.80	46.12	74.00	28.51	V
7439.500	44.61	-32.79	35.42	41.98	74.00	29.39	H
9919.000	46.11	-32.04	36.84	41.31	74.00	27.89	V
12400.000	48.68	-29.42	38.60	39.50	74.00	25.32	H

#### $\pi/4$ DQPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2385.250	60.90	4.60	27.47	28.83	74.00	13.10	H
2389.607	60.87	4.61	27.48	28.78	74.00	13.13	V
4804.000	42.27	-35.05	33.98	43.35	74.00	31.73	H
7206.000	42.81	-33.04	35.52	40.32	74.00	31.19	V
9608.000	44.31	-32.21	36.32	40.20	74.00	29.69	H
12010.000	47.02	-30.19	38.80	38.41	74.00	26.98	H

#### $\pi/4$ DQPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2367.200	44.17	-35.63	31.41	48.38	74.00	29.83	H
2510.000	45.28	-35.78	32.44	48.62	74.00	28.72	V
4882.000	43.58	-34.37	33.83	44.13	74.00	30.42	V
7323.000	42.45	-33.03	35.40	40.08	74.00	31.55	V
9764.000	43.89	-31.87	36.57	39.19	74.00	30.11	H
12205.000	47.07	-29.39	38.79	37.66	74.00	26.93	V

#### $\pi/4$ DQPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.800	62.28	4.65	27.80	29.83	74.00	11.72	H
2483.993	61.67	4.65	27.80	29.22	74.00	12.33	V
4960.000	42.40	-34.42	33.80	43.03	74.00	31.60	V
7440.000	42.06	-32.79	35.42	39.44	74.00	31.94	V
9920.000	44.90	-32.04	36.84	40.09	74.00	29.10	H
12400.000	46.50	-29.42	38.60	37.32	74.00	27.50	V



### 8DPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2385.910	60.75	4.60	27.47	28.68	74.00	13.25	V
2389.555	60.50	4.61	27.48	28.41	74.00	13.50	V
4804.000	44.40	-35.05	33.98	45.47	74.00	29.60	H
7206.000	42.83	-33.04	35.52	40.35	74.00	31.17	H
9608.000	44.39	-32.21	36.32	40.28	74.00	29.61	V
12010.000	47.16	-30.19	38.80	38.55	74.00	26.84	H

### 8DPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2350.200	44.88	-35.94	31.20	49.63	74.00	29.12	V
2512.400	45.88	-35.89	32.45	49.32	74.00	28.12	V
4882.000	43.47	-34.37	33.83	44.01	74.00	30.53	V
7323.000	43.12	-33.03	35.40	40.75	74.00	30.88	H
9764.000	45.11	-31.87	36.57	40.41	74.00	28.89	H
12205.000	47.17	-29.39	38.79	37.77	74.00	26.83	V

### 8DPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.731	61.34	4.65	27.80	28.89	74.00	12.66	V
2485.531	61.73	4.65	27.80	29.28	74.00	12.27	V
4960.000	42.09	-34.42	33.80	42.71	74.00	31.91	V
7440.000	43.22	-32.79	35.42	40.59	74.00	30.78	H
9920.000	44.47	-32.04	36.84	39.67	74.00	29.53	V
12400.000	47.60	-29.42	38.60	38.41	74.00	26.40	H

## Average Measurement results

### GFSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2381.681	46.61	4.59	27.46	14.55	54.00	7.39	V
2385.656	46.52	4.60	27.47	14.44	54.00	7.48	V
4804.000	38.21	-35.05	33.98	39.28	54.00	15.79	H
7206.000	31.57	-33.04	35.52	29.09	54.00	22.43	H
9608.000	32.63	-32.21	36.32	28.53	54.00	21.37	H
12010.000	35.42	-30.19	38.80	26.81	54.00	18.58	H

### GFSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2438.231	47.36	4.66	27.73	14.97	54.00	6.64	V
2443.781	47.28	4.67	27.76	14.85	54.00	6.72	V
4881.667	38.93	-34.38	33.83	39.48	54.00	15.07	H
7323.000	31.27	-33.03	35.40	28.90	54.00	22.73	V
9764.000	32.64	-31.87	36.57	27.94	54.00	21.36	V
12205.000	35.66	-29.39	38.79	26.26	54.00	18.34	V

### GFSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2485.537	47.71	4.65	27.80	15.26	54.00	6.29	V
2493.340	47.54	4.63	27.80	15.11	54.00	6.46	V
4959.667	38.18	-34.43	33.80	38.81	54.00	15.82	V
7440.000	30.83	-32.79	35.42	28.20	54.00	23.17	H
9920.000	32.61	-32.04	36.84	27.81	54.00	21.39	V
12400.000	35.55	-29.42	38.60	26.37	54.00	18.45	H

#### $\pi/4$ DQPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2374.550	46.67	4.58	27.45	14.65	54.00	7.33	V
2377.931	46.71	4.58	27.46	14.67	54.00	7.29	V
4803.667	33.53	-35.05	33.98	34.60	54.00	20.47	V
7206.000	31.42	-33.04	35.52	28.93	54.00	22.58	V
9608.000	32.41	-32.21	36.32	28.30	54.00	21.59	V
12010.000	34.91	-30.19	38.80	26.30	54.00	19.09	V

#### $\pi/4$ DQPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2437.894	47.34	4.66	27.73	14.95	54.00	6.66	V
2443.762	47.33	4.67	27.76	14.90	54.00	6.67	V
4881.666	33.52	-34.38	33.83	34.08	54.00	20.48	H
7323.000	30.96	-33.03	35.40	28.59	54.00	23.04	H
9764.000	32.13	-31.87	36.57	27.44	54.00	21.87	H
12205.000	35.12	-29.39	38.79	25.72	54.00	18.88	V

#### $\pi/4$ DQPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2485.725	47.53	4.65	27.80	15.09	54.00	6.47	V
2495.643	47.51	4.62	27.80	15.08	54.00	6.49	V
4960.000	32.80	-34.42	33.80	33.43	54.00	21.20	V
7440.000	30.68	-32.79	35.42	28.05	54.00	23.32	H
9920.000	32.51	-32.04	36.84	27.71	54.00	21.49	V
12400.000	35.13	-29.42	38.60	25.95	54.00	18.87	V

### 8DPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2375.000	46.66	4.58	27.45	14.63	54.00	7.34	V
2379.618	46.73	4.59	27.46	14.68	54.00	7.27	V
4804.000	33.23	-35.05	33.98	34.30	54.00	20.77	V
7206.000	31.22	-33.04	35.52	28.74	54.00	22.78	V
9608.000	32.35	-32.21	36.32	28.24	54.00	21.65	V
12010.000	34.68	-30.19	38.80	26.07	54.00	19.32	V

### 8DPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2437.800	47.41	4.66	27.73	15.02	54.00	6.59	V
2443.894	47.25	4.67	27.76	14.82	54.00	6.75	V
4881.667	33.56	-34.38	33.83	34.11	54.00	20.44	H
7323.000	31.08	-33.03	35.40	28.71	54.00	22.92	V
9764.000	32.43	-31.87	36.57	27.73	54.00	21.57	V
12205.000	35.22	-29.39	38.79	25.81	54.00	18.78	V

### 8DPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2484.225	47.62	4.65	27.80	15.17	54.00	6.38	V
2488.218	47.61	4.64	27.80	15.17	54.00	6.39	V
4960.000	32.71	-34.42	33.80	33.33	54.00	21.29	V
7440.000	30.63	-32.79	35.42	28.01	54.00	23.37	V
9920.000	32.48	-32.04	36.84	27.67	54.00	21.52	V
12400.000	35.21	-29.42	38.60	26.03	54.00	18.79	H

**Conclusion: Pass**

## B.7. Time of Occupancy (Dwell Time)

**Method of Measurement: See ANSI C63.10-clause 7.8.4**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW  $\geq$  RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

### Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

### Measurement Result:

#### For GFSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	DH1	Fig.64	0.37	Fig.65	319	118.03	P
	DH3	Fig.66	1.63	Fig.67	99	161.37	P
	DH5	Fig.68	2.88	Fig.69	65	187.2	P

#### For $\pi/4$ DQPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	2DH1	Fig.70	0.38	Fig.71	322	122.36	P
	2DH3	Fig.72	1.63	Fig.73	111	180.93	P
	2DH5	Fig.74	2.88	Fig.75	65	187.2	P



### For 8DPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	3DH1	Fig.76	0.38	Fig.77	319	121.22	P
	3DH3	Fig.78	1.63	Fig.79	102	166.26	P
	3DH5	Fig.80	2.88	Fig.81	66	190.08	P

**Conclusion: PASS**

**Test graphs as below:**

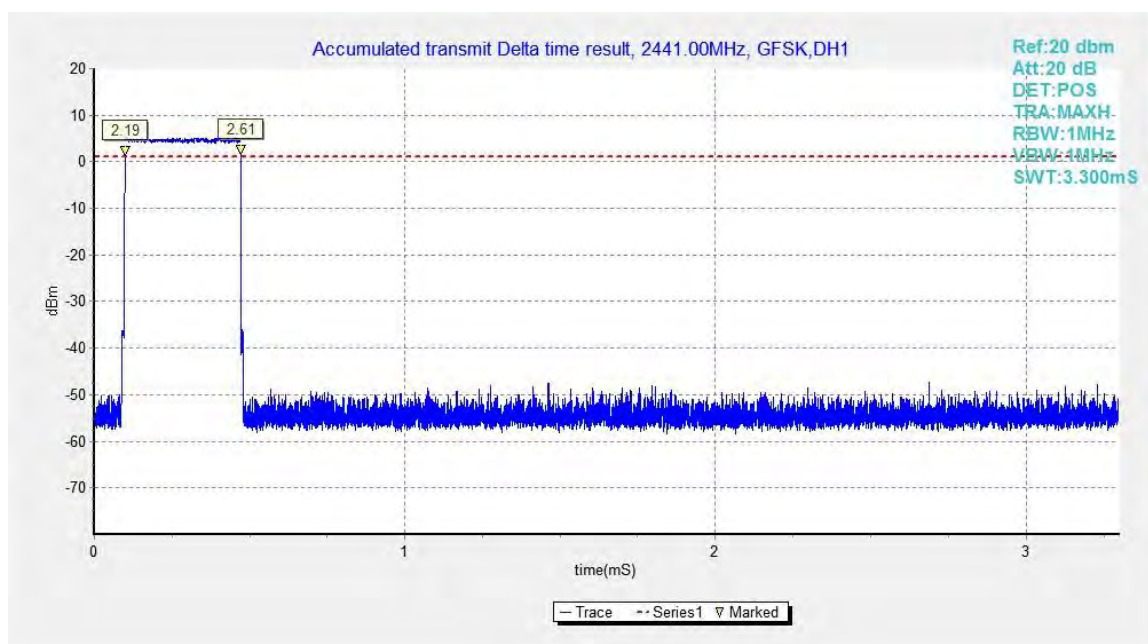


Fig.64. Time of occupancy (Dwell Time): Channel 39, Packet DH1

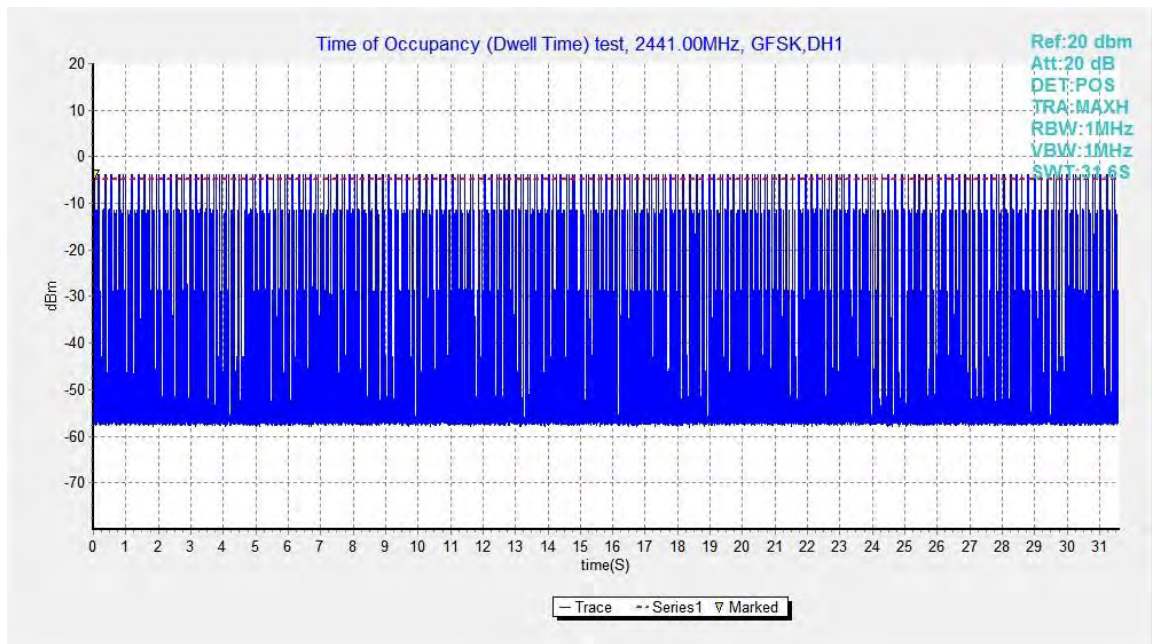


Fig.65. Number of Transmissions Measurement: Channel 39,Packet DH1

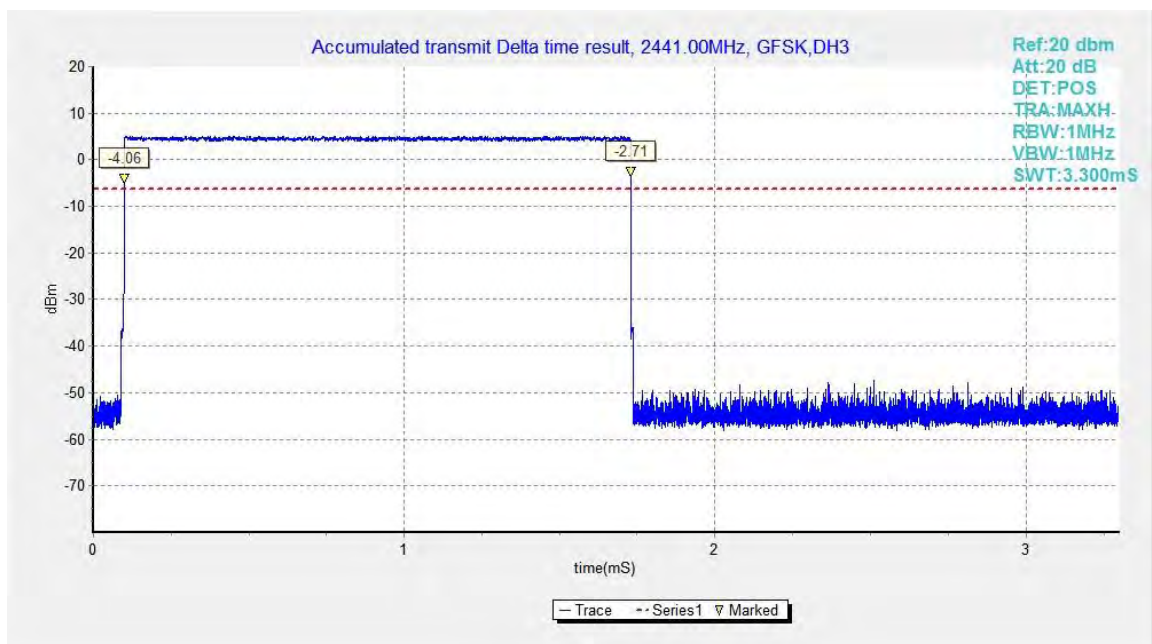


Fig.66. Time of occupancy (Dwell Time): Channel 39, Packet DH3

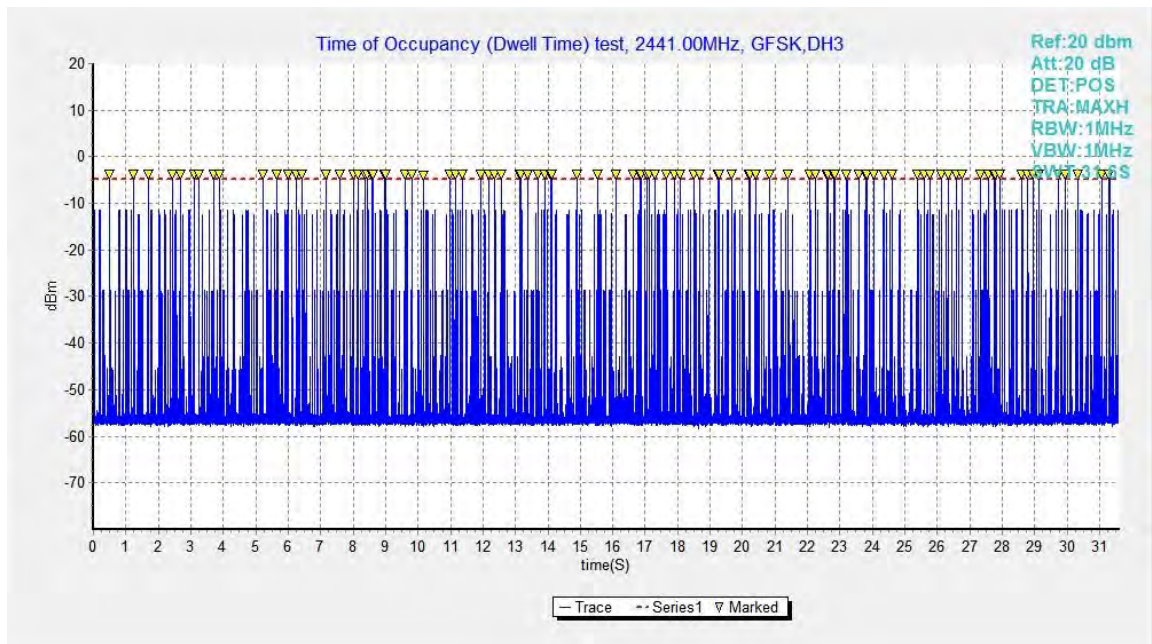


Fig.67. Number of Transmissions Measurement: Channel 39,Packet DH3

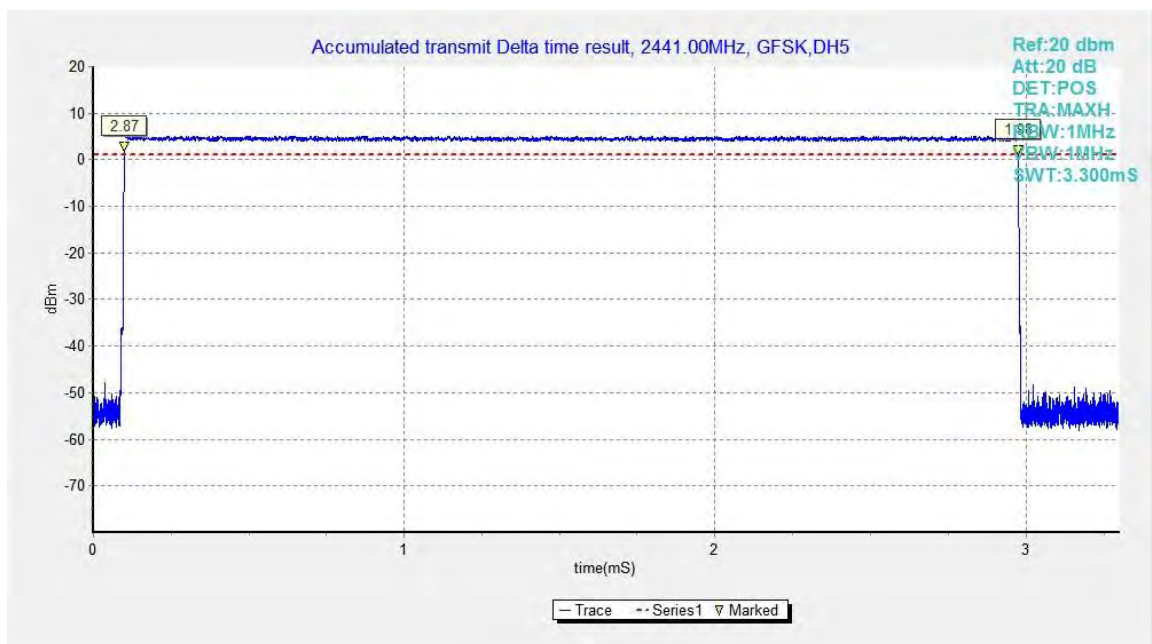


Fig.68. Time of occupancy (Dwell Time): Channel 39, Packet DH5



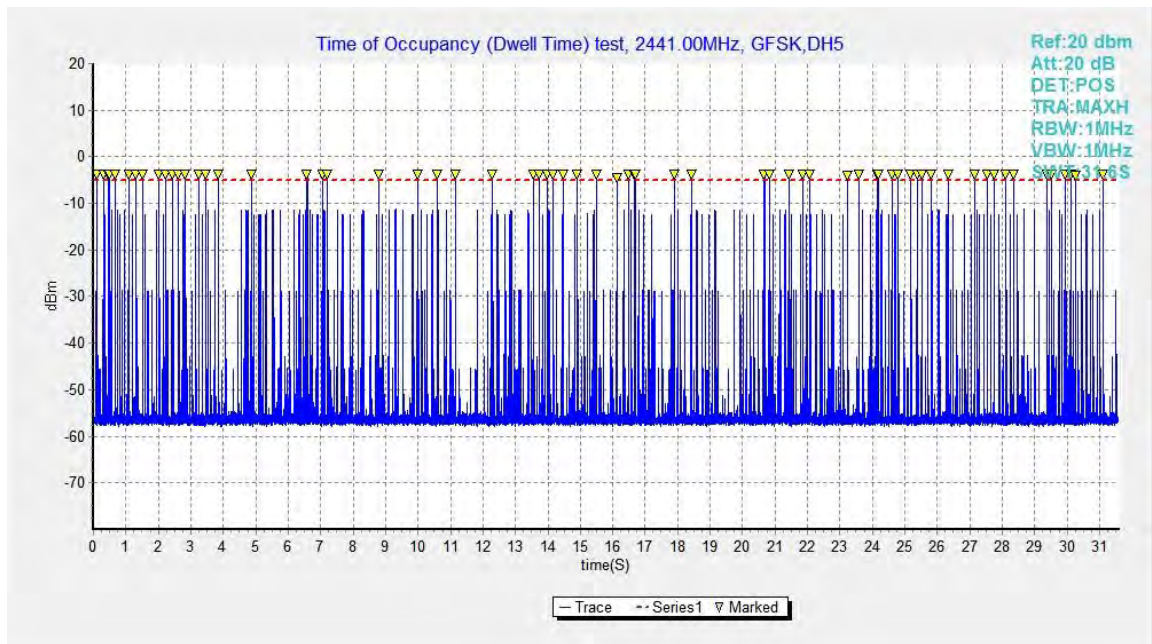


Fig.69. Number of Transmissions Measurement: Channel 39,Packet DH5

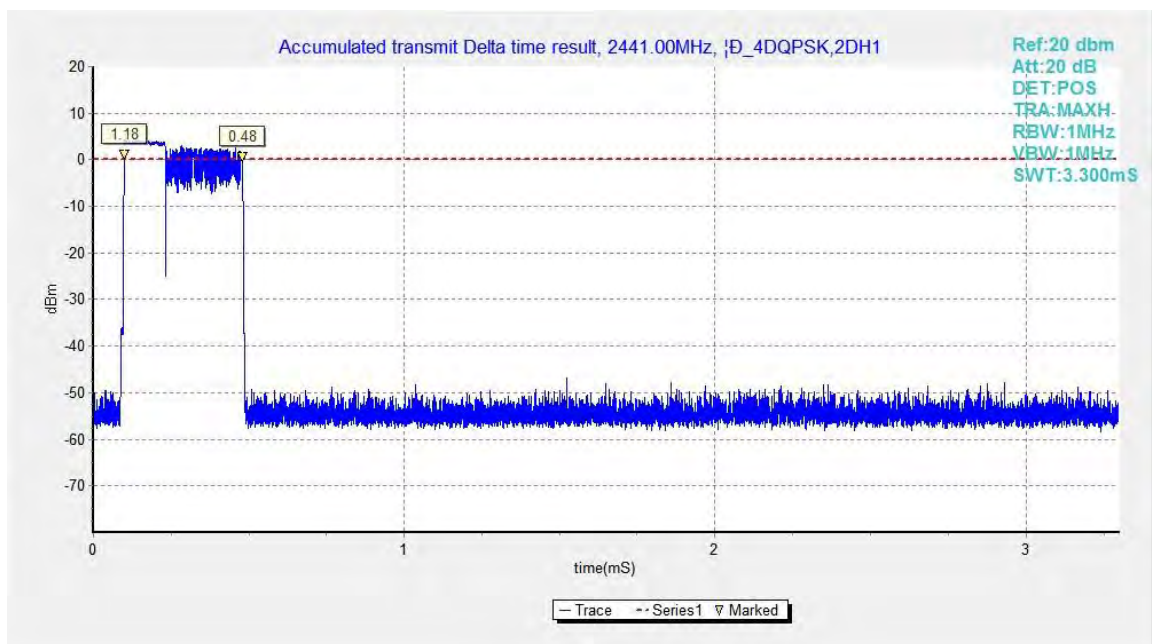


Fig.70. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

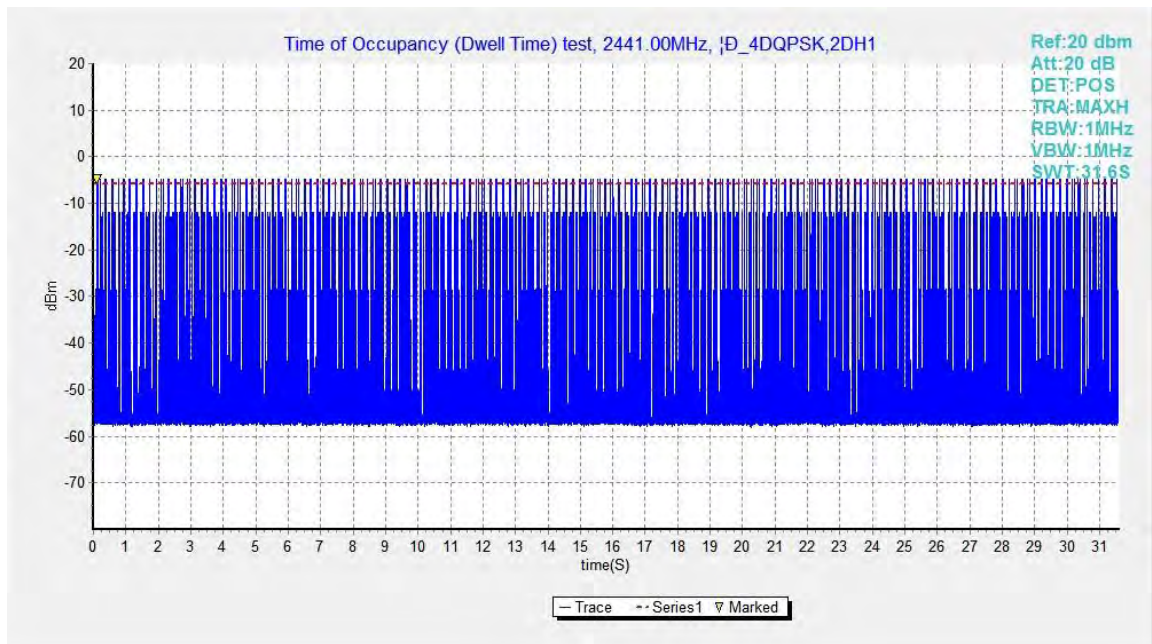


Fig.71. Number of Transmissions Measurement: Channel 39,Packet 2-DH1

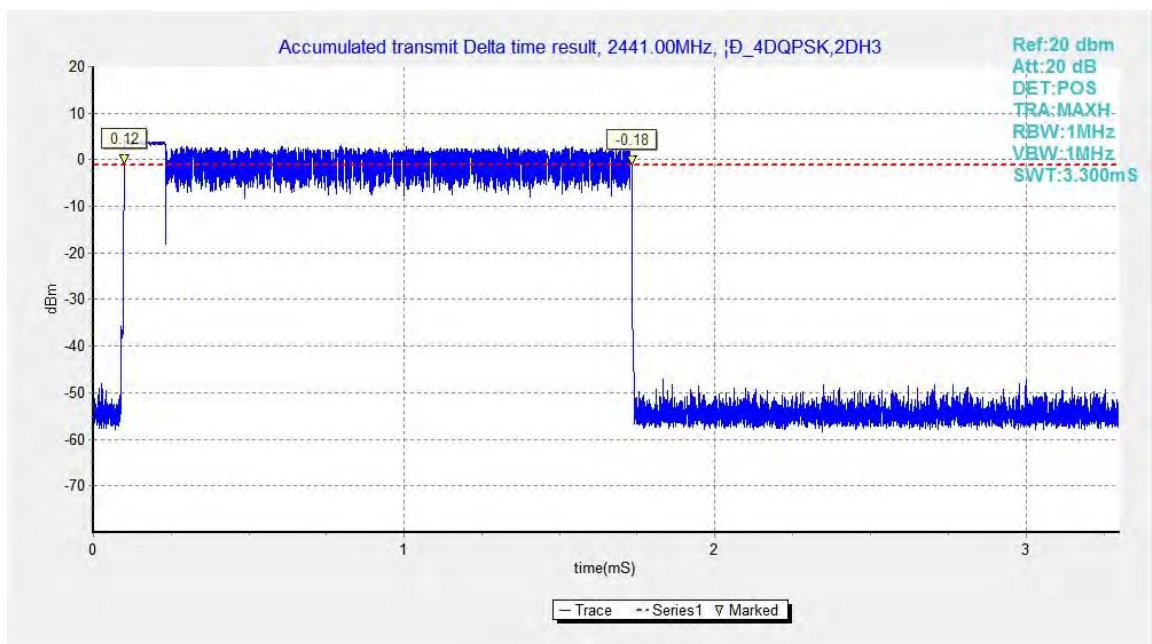


Fig.72. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3



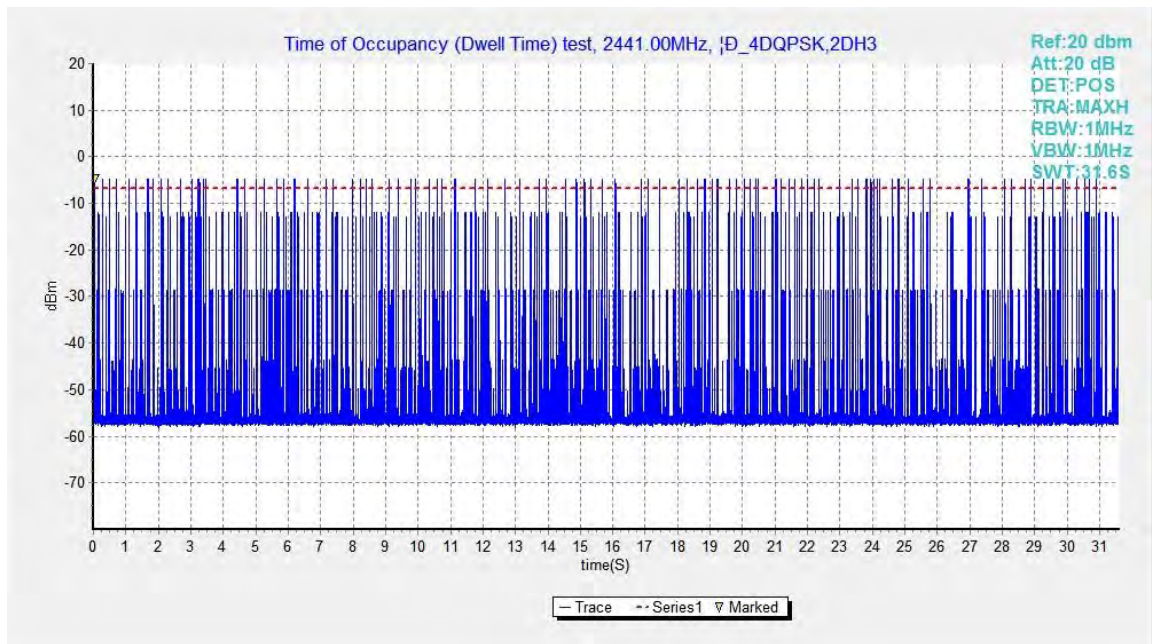


Fig.73. Number of Transmissions Measurement: Channel 39,Packet 2-DH3

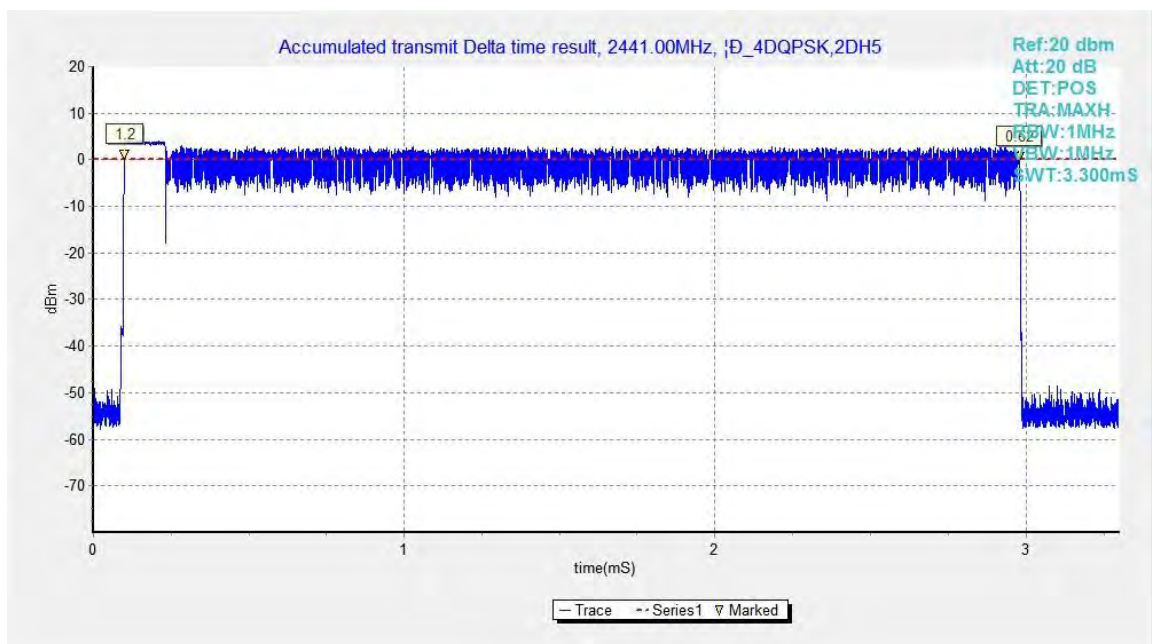


Fig.74. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

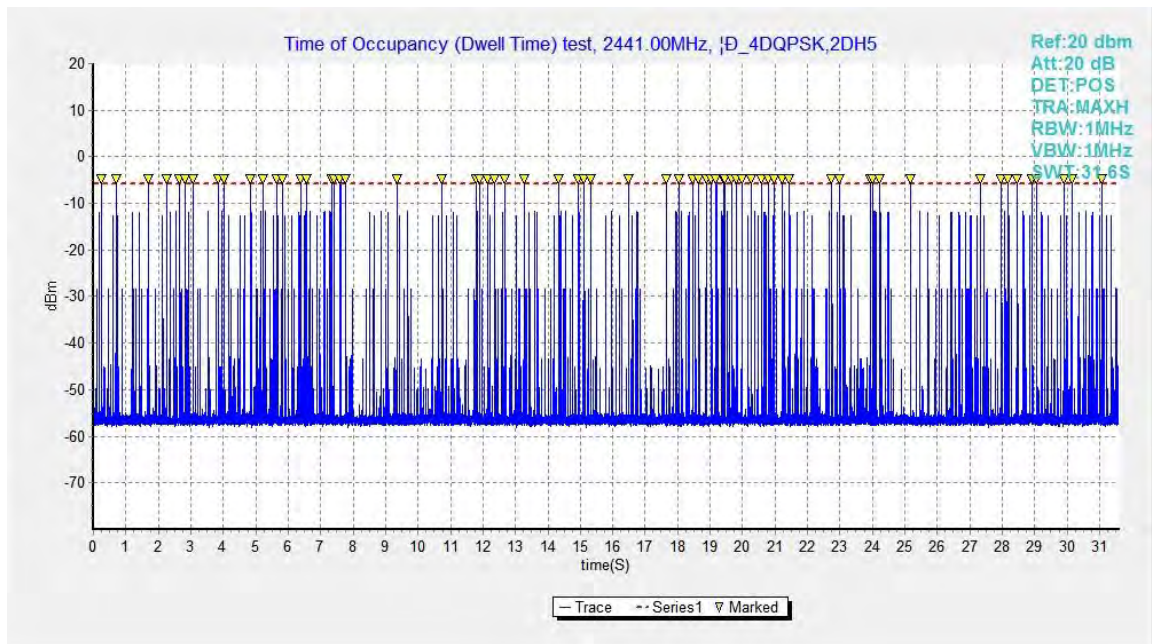


Fig.75. Number of Transmissions Measurement: Channel 39,Packet 2-DH5

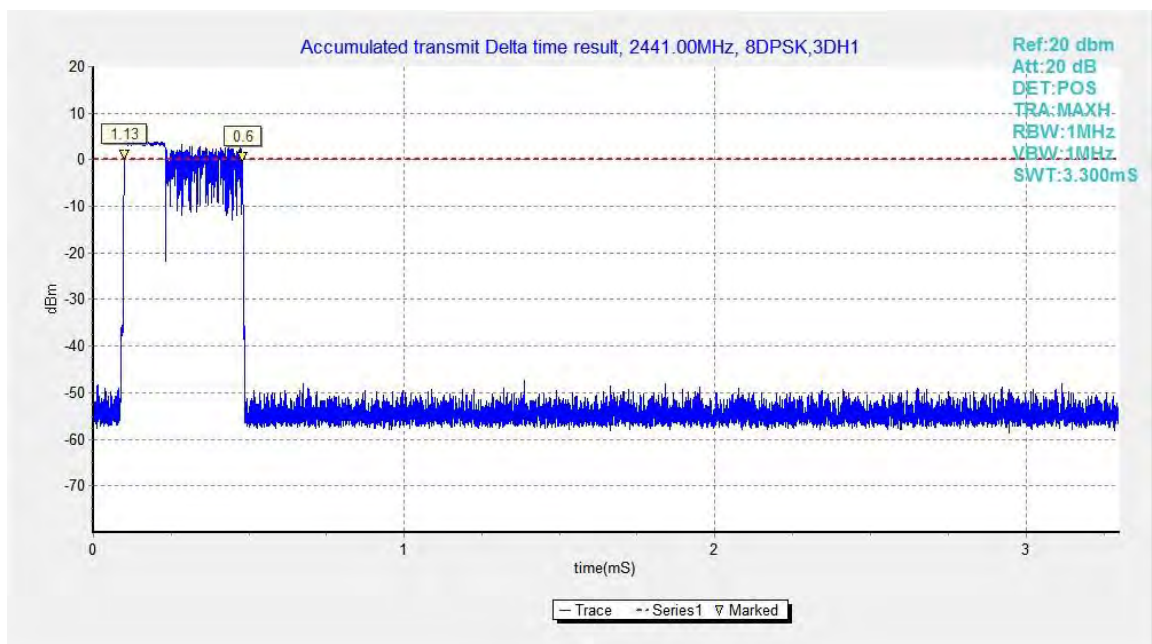


Fig.76. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1



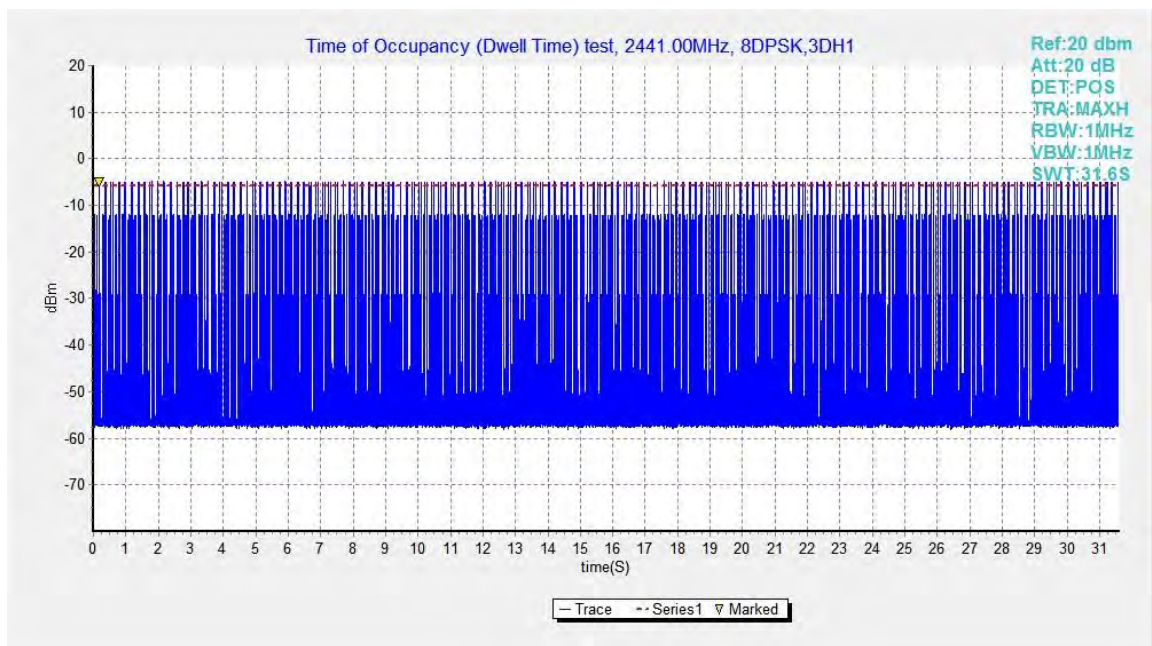


Fig.77. Number of Transmissions Measurement: Channel 39,Packet 3-DH1

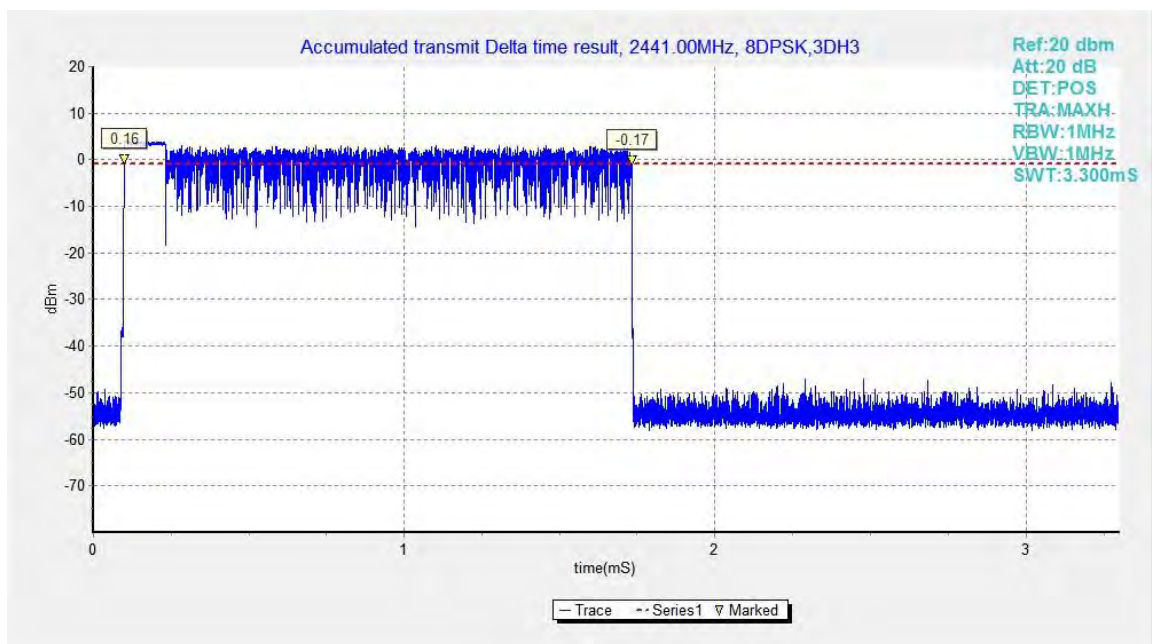


Fig.78. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

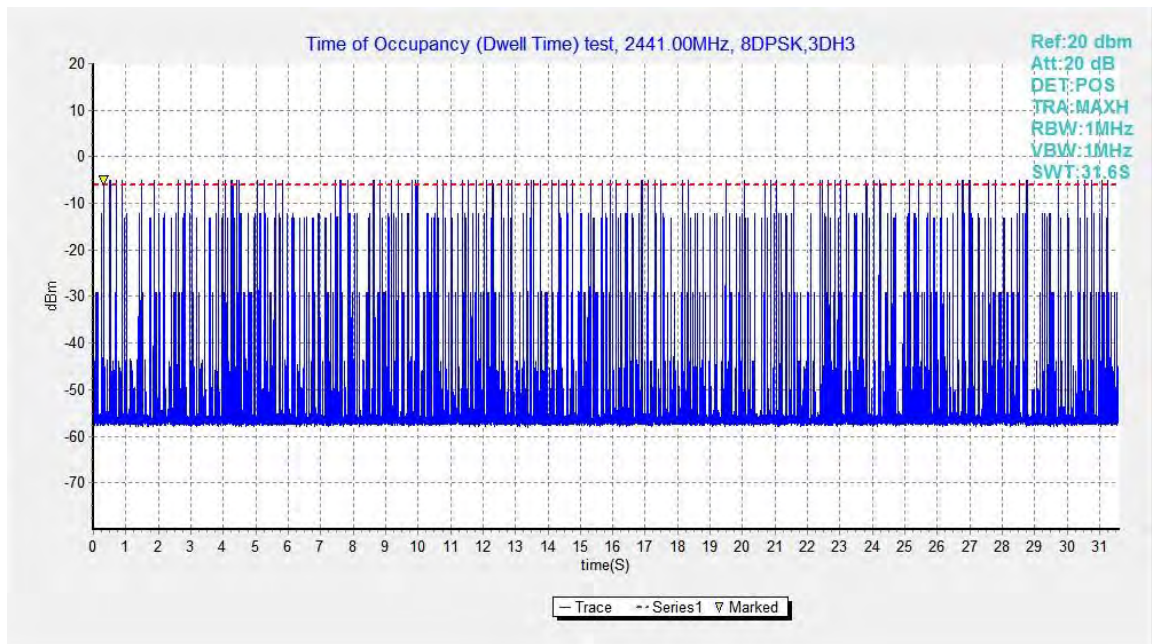


Fig.79. Number of Transmissions Measurement: Channel 39,Packet 3-DH3

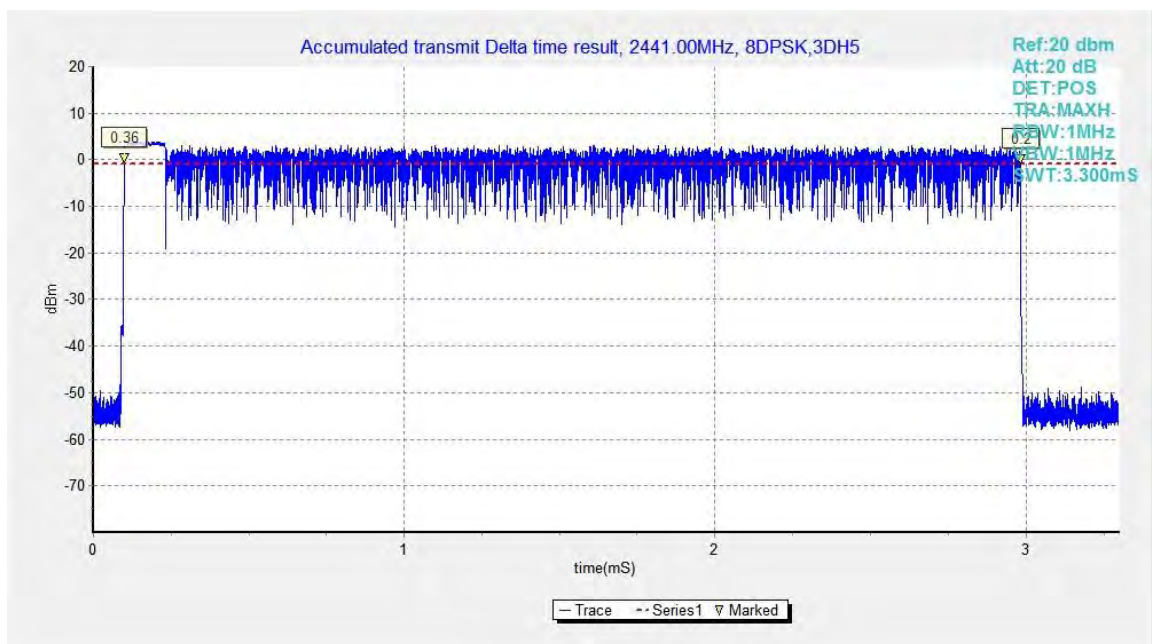


Fig.80. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5



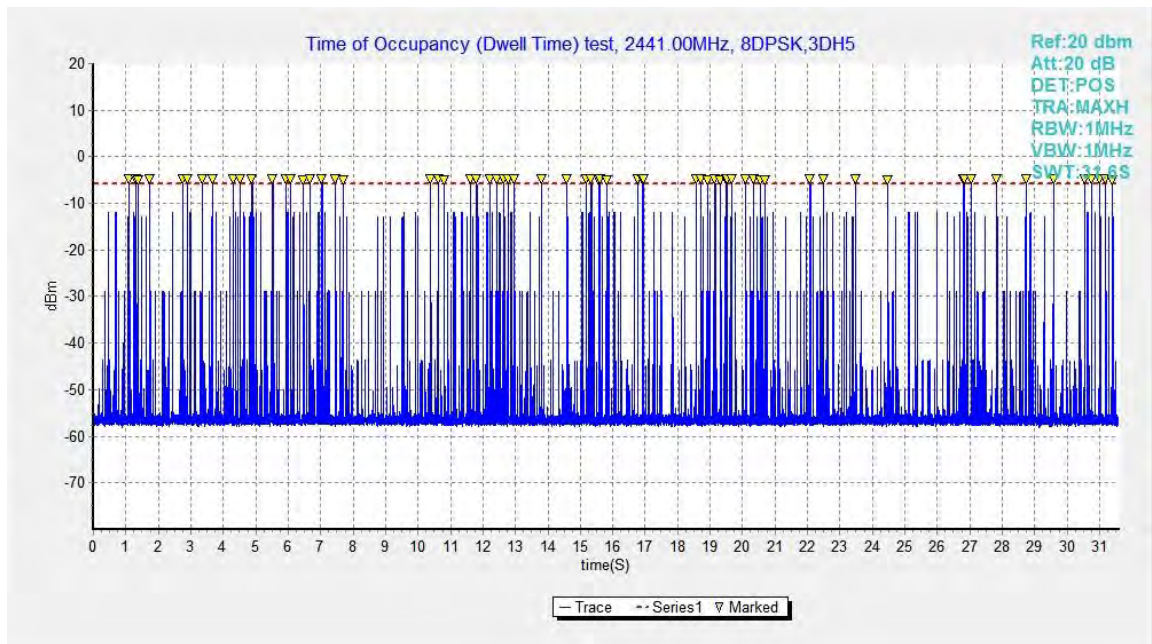


Fig.81. Number of Transmissions Measurement: Channel 39,Packet 3-DH5

## B.8. 20dB Bandwidth

**Method of Measurement: See ANSI C63.10-clause 6.9.2**

Measurement Procedure - Unwanted Emissions

1. Set RBW = 30kHz.
2. Set VBW = 100 kHz.
3. Set span to 3MHz
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

\* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

### Measurement Results:

#### For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.82	944.25	NA
39	Fig.83	943.50	NA
78	Fig.84	944.25	NA

#### For $\pi/4$ DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.85	1255.50	NA
39	Fig.86	1257.00	NA
78	Fig.87	1220.25	NA

#### For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.88	1257.75	NA
39	Fig.89	1254.75	NA
78	Fig.90	1257.00	NA

**Conclusion: NA**

**Test graphs as below:**

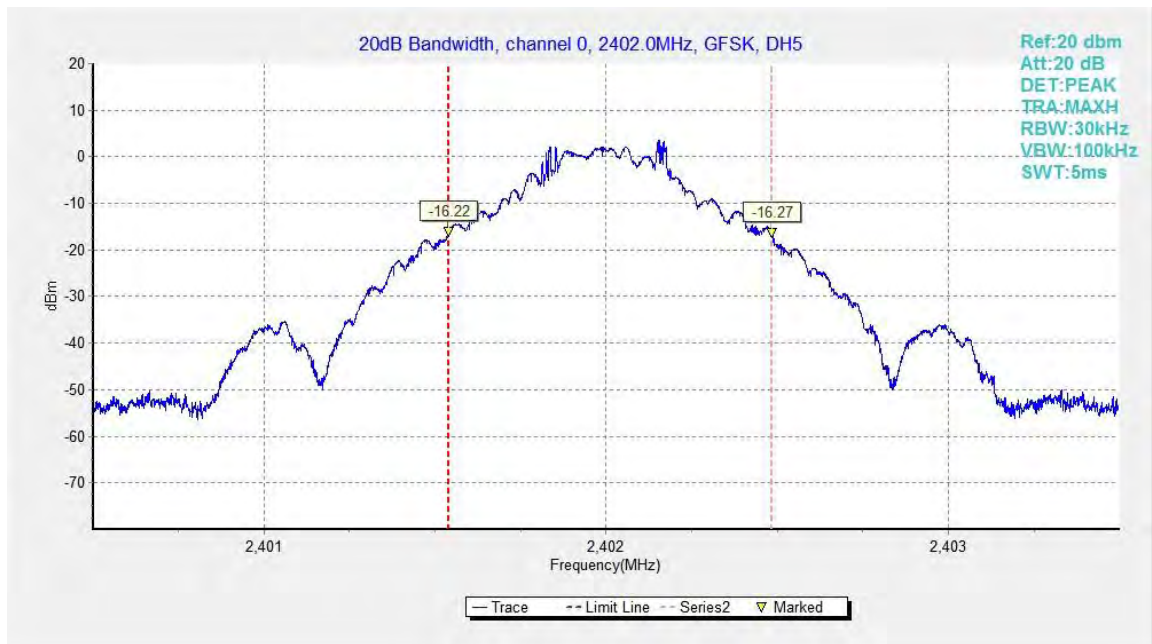


Fig.82. 20dB Bandwidth: GFSK, Channel 0

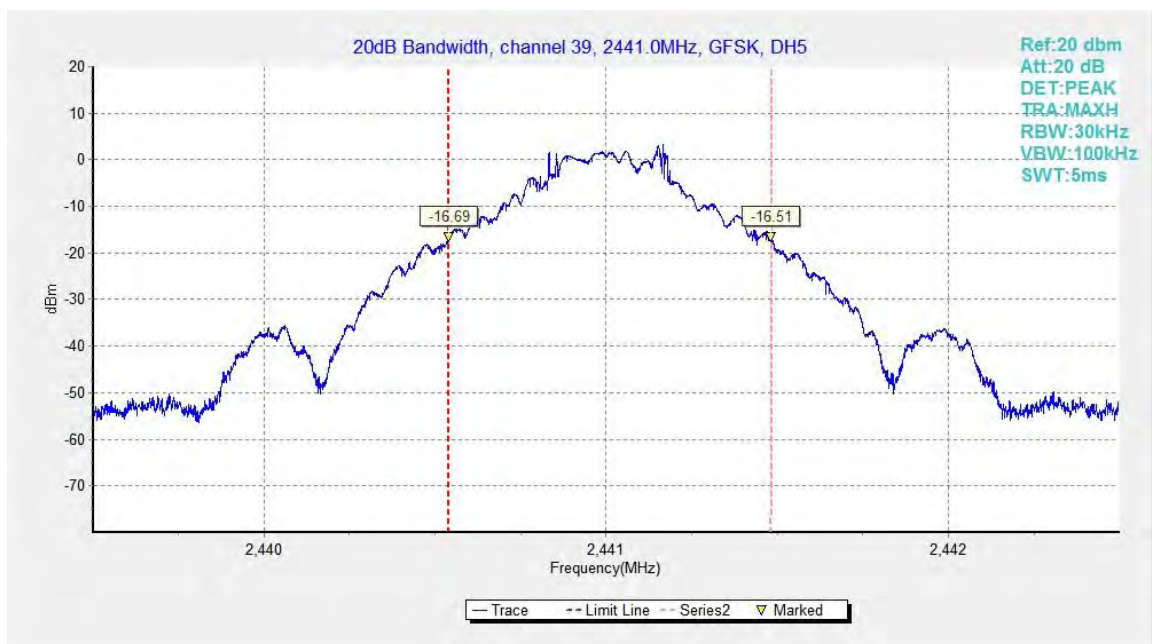


Fig.83. 20dB Bandwidth: GFSK, Channel 39

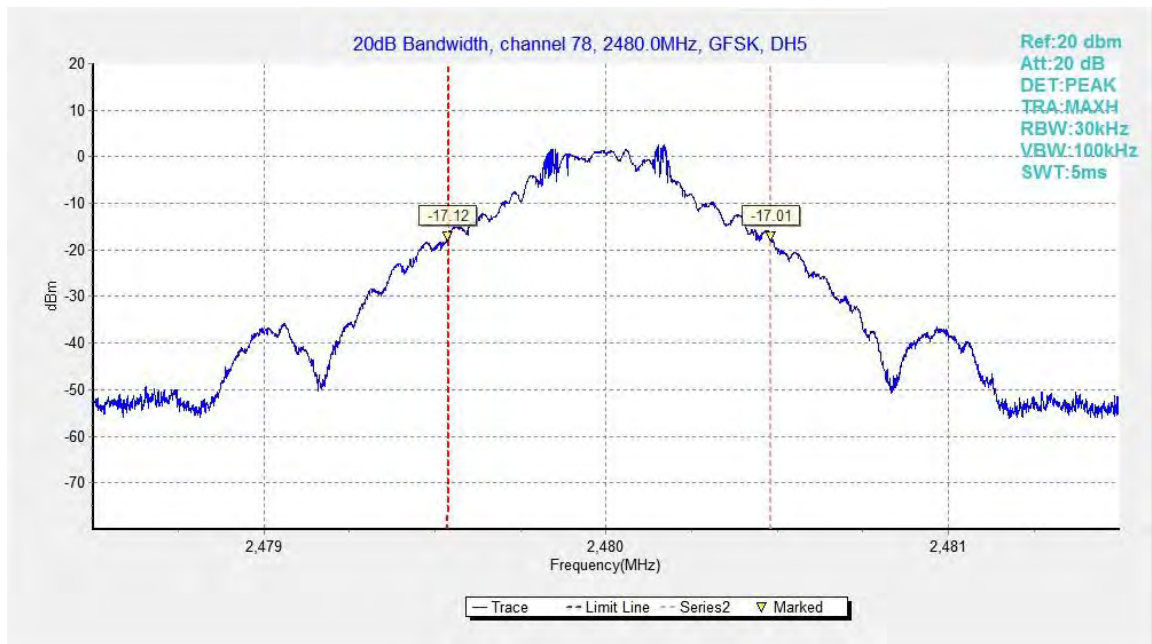


Fig.84. 20dB Bandwidth: GFSK, Channel 78

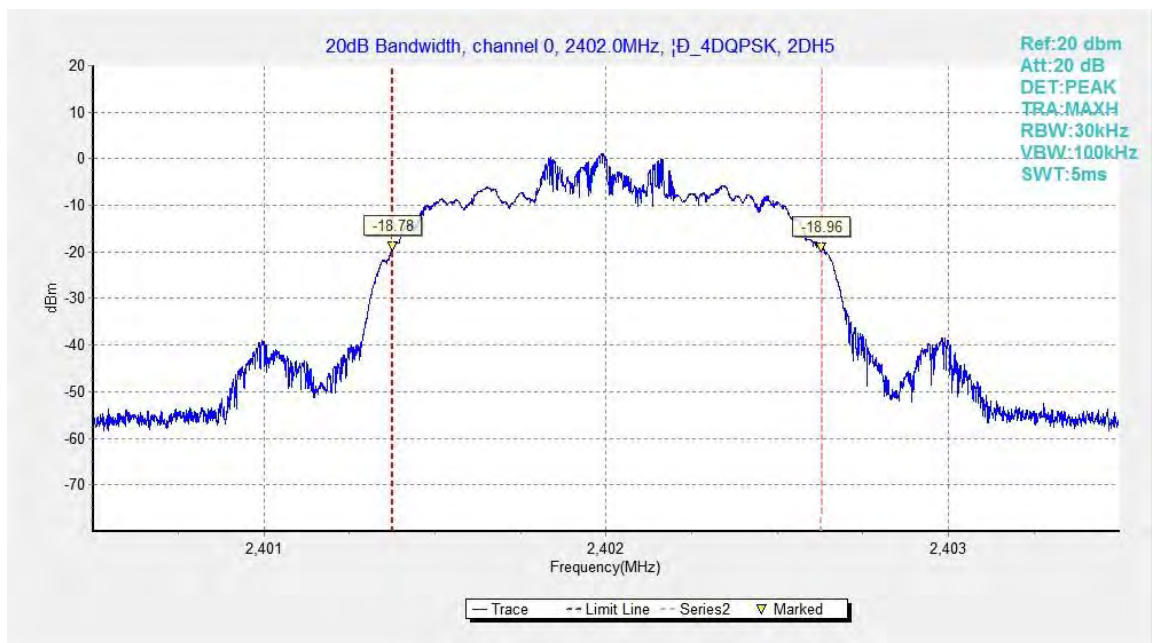


Fig.85. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 0



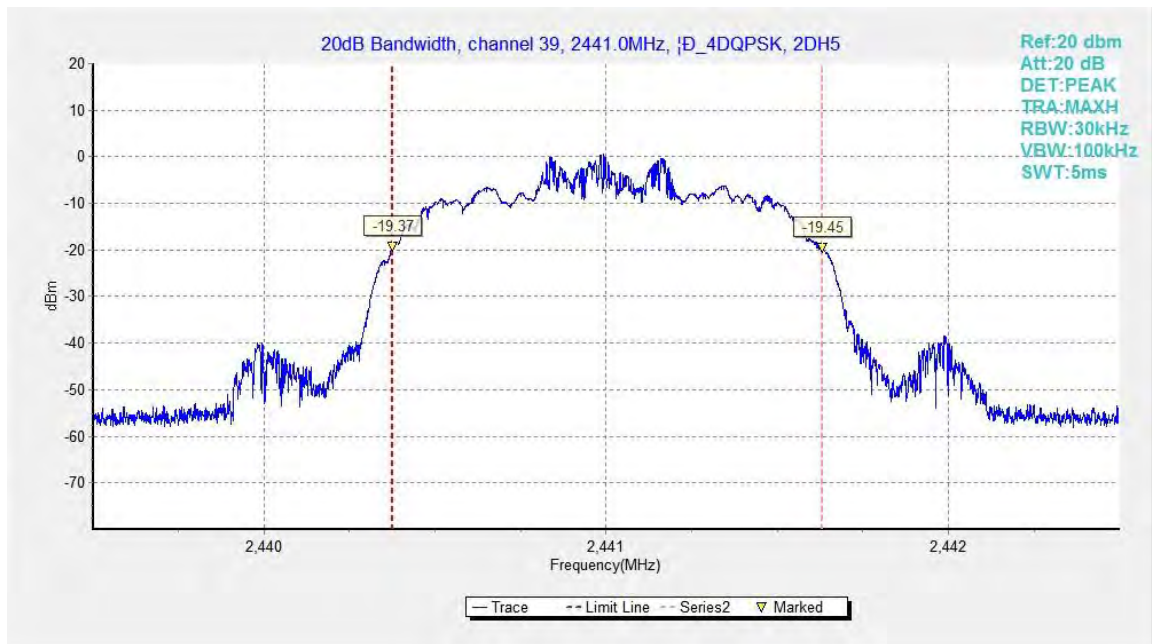


Fig.86. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 39

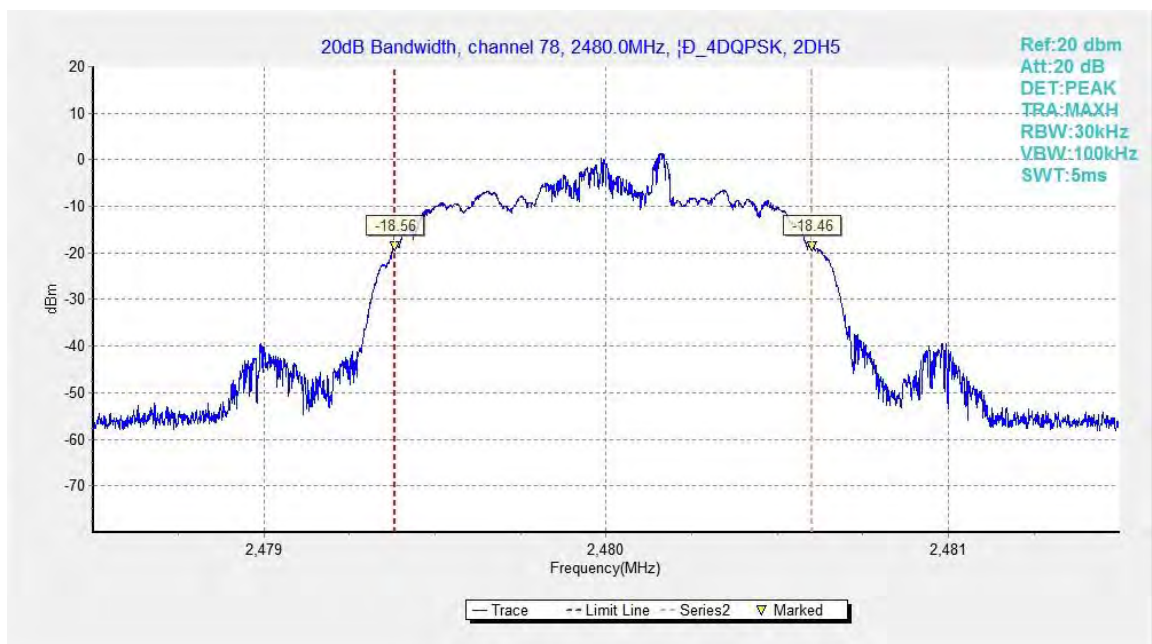


Fig.87. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 78

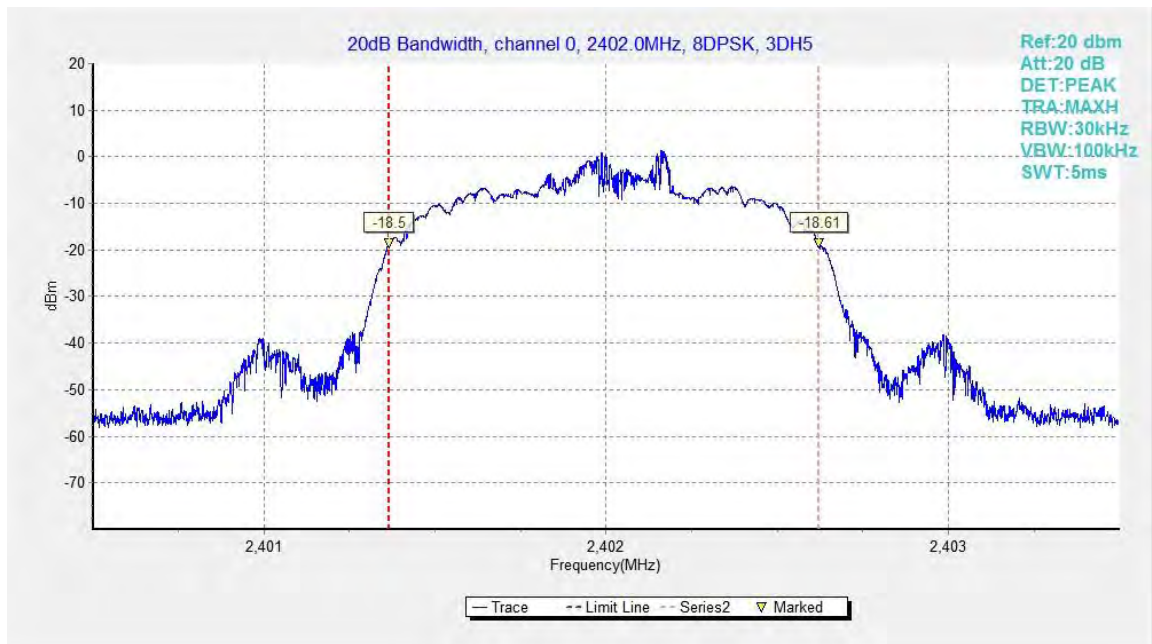


Fig.88. 20dB Bandwidth: 8DPSK, Channel 0

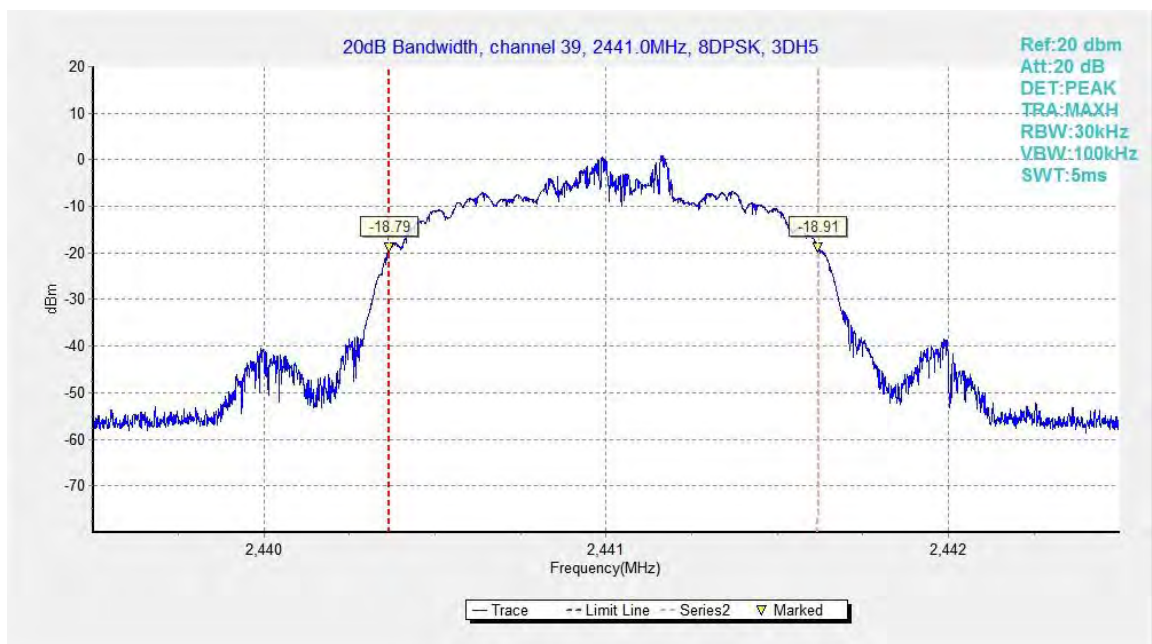


Fig.89. 20dB Bandwidth: 8DPSK, Channel 39

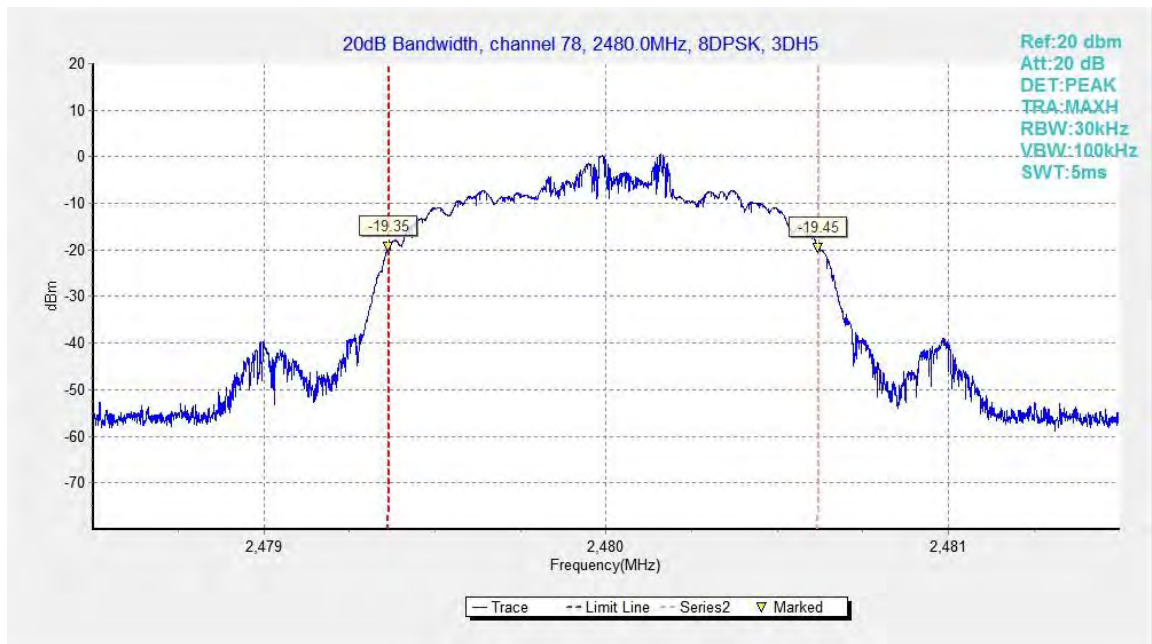


Fig.90. 20dB Bandwidth: 8DPSK, Channel 78

## B.9. Carrier Frequency Separation

**Method of Measurement:** See ANSI C63.10-clause 7.8.2

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=300kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

\* Comment: This limit should be over 25 kHz or  $(2/3) * 20\text{dB}$  bandwidth, whichever is greater.

### Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth

### Measurement Result:

#### For GFSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.91	984.75	P

#### For $\pi/4$ DQPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.92	1011.75	P

#### For 8DPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.93	1147.50	P

**Conclusion: PASS**

**Test graphs as below:**



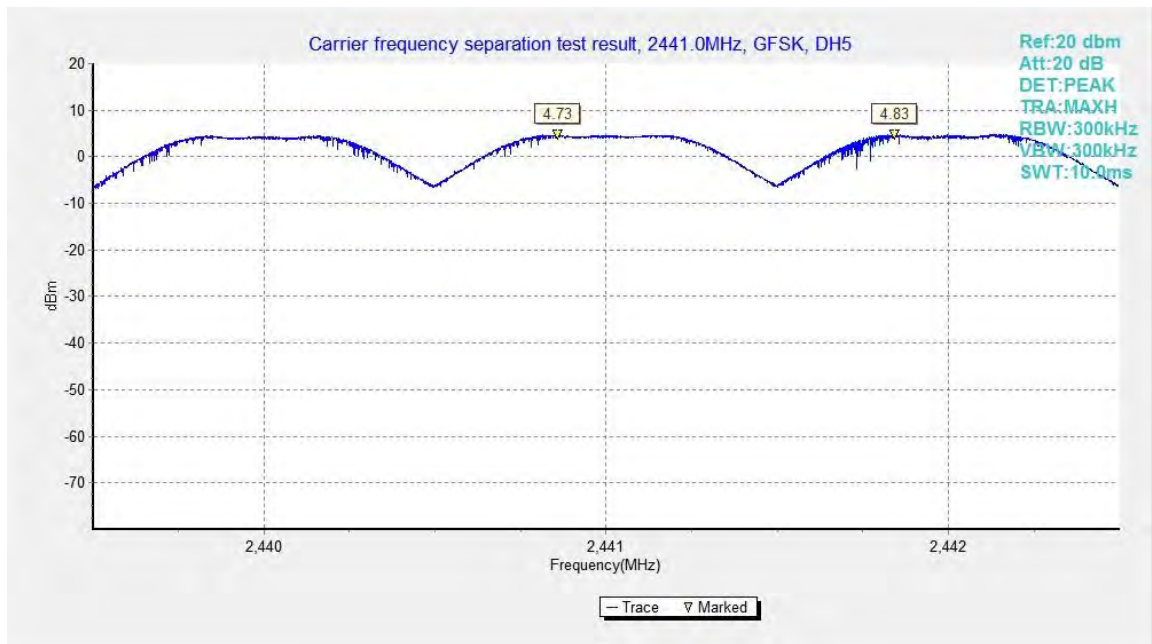


Fig.91. Carrier frequency separation measurement: GFSK, Channel 39

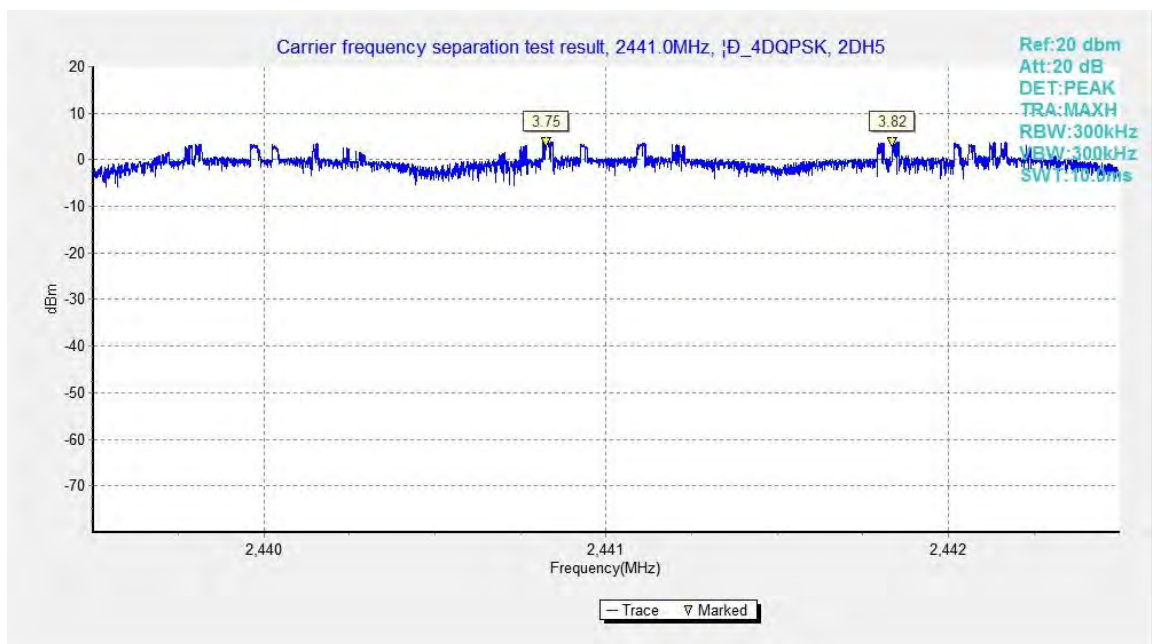


Fig.92. Carrier frequency separation measurement:  $\pi/4$  DQPSK, Channel 39

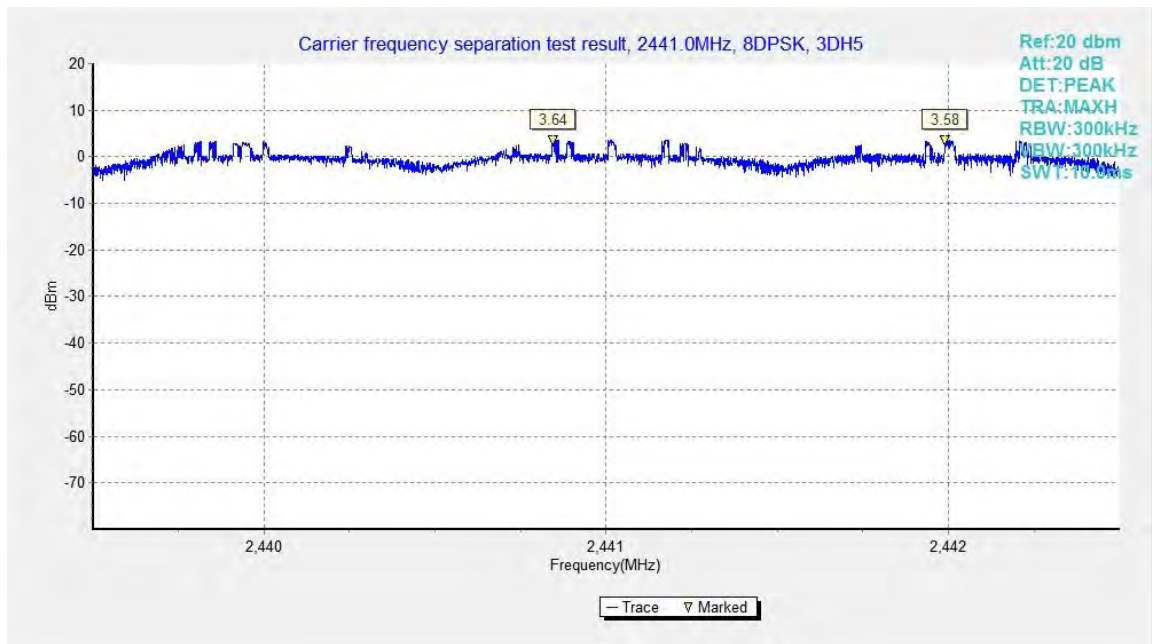


Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39

## B.10. Number of Hopping Channels

**Method of Measurement:** See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

### Measurement Result:

#### For GFSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.94	79	P
40~78	Fig.95		

#### For $\pi/4$ DQPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.96	79	P
40~78	Fig.97		

#### For 8DPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.98	79	P
40~78	Fig.99		

**Conclusion: PASS**

**Test graphs as below:**

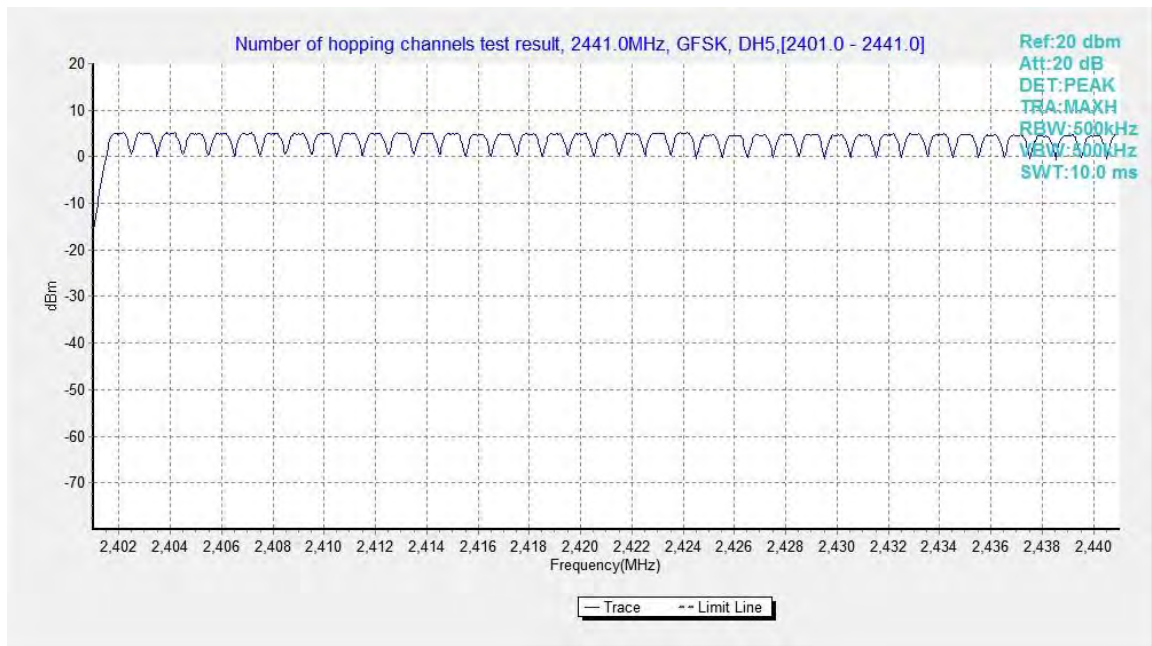


Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39

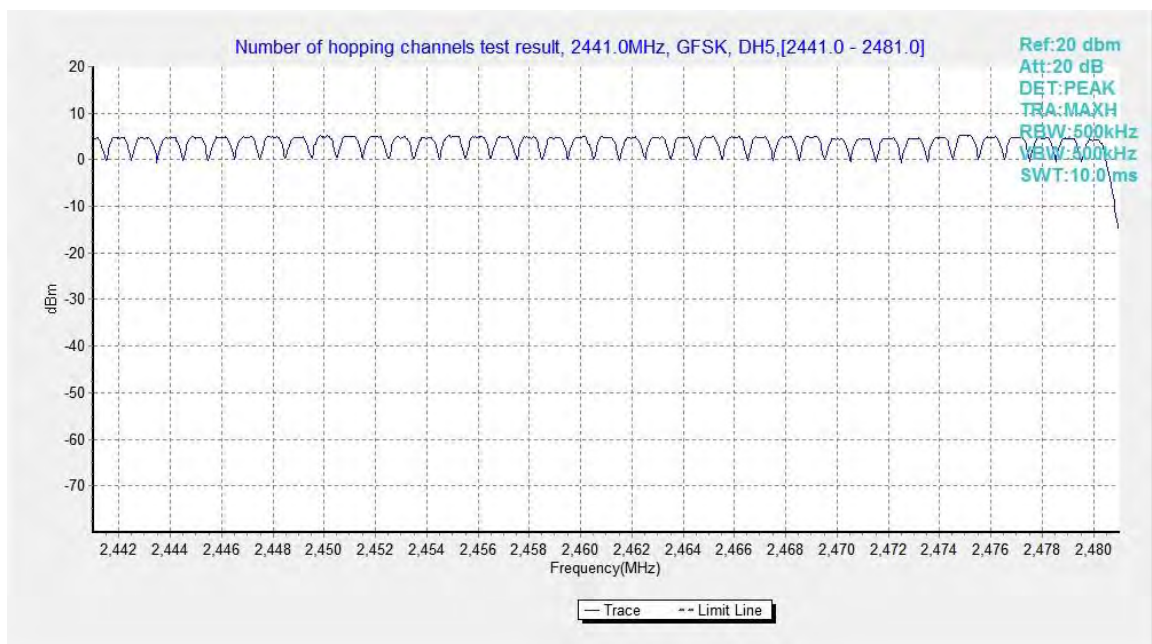


Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78



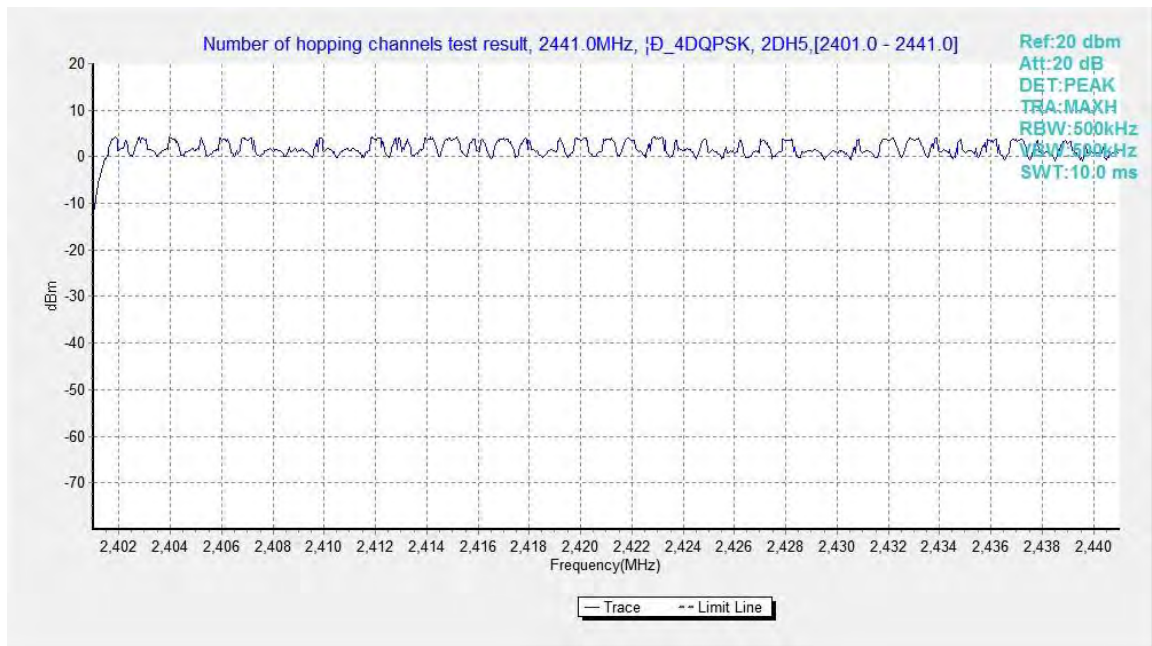


Fig.96. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 0 - 39

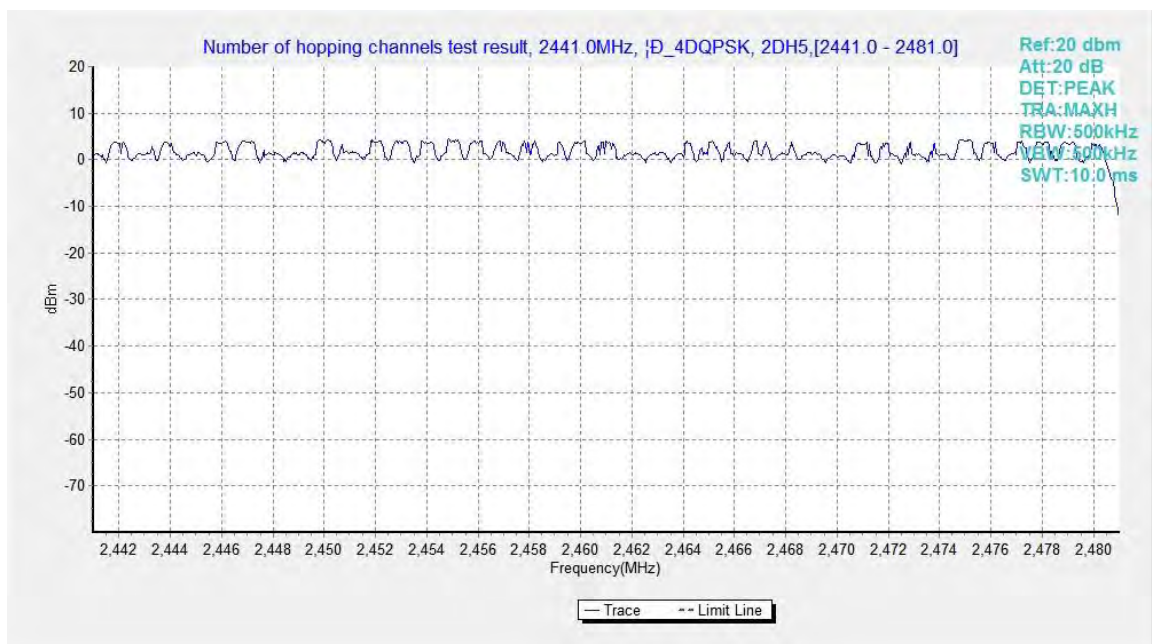


Fig.97. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 40 - 78

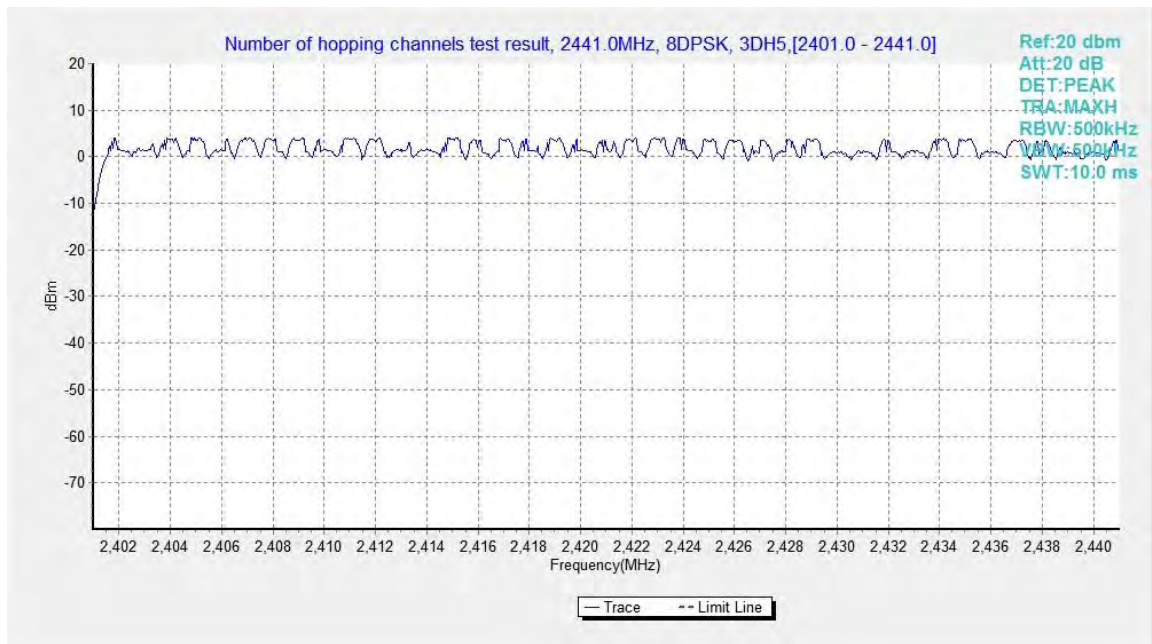


Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

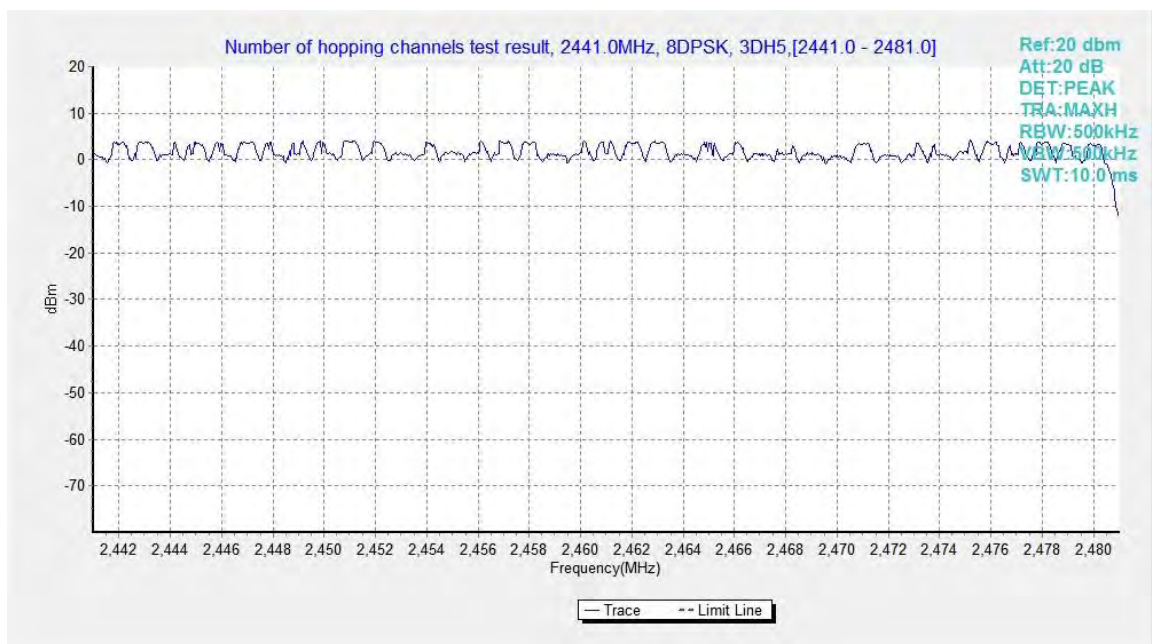


Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78

## B.11. AC Powerline Conducted Emission

## Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

### Method of Measurement:

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver:  
Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

**Test Condition:**

Voltage (V)	Frequency (Hz)
120	60

## Measurement Setup

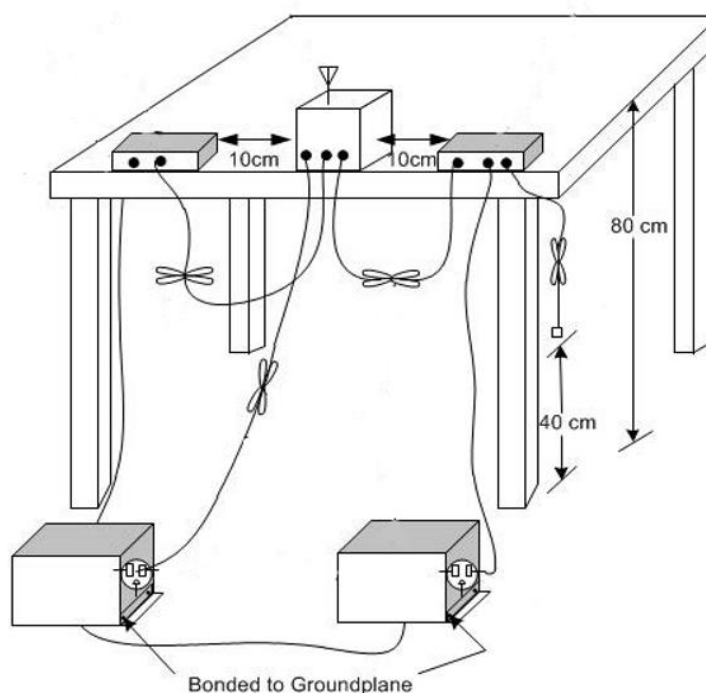

**Measurement Result and limit:**
**EUT ID: UT07a**

Bluetooth (Quasi-peak Limit)


Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	66 to 56	Fig.B.11.1	Fig.B.11.2	P
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Bluetooth (Average Limit)

Bluetooth (Average Limit)				
Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	56 to 46	Fig.B.11.1	Fig.B.11.2	<b>P</b>
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

**Conclusion: Pass**
**Test graphs as below:**



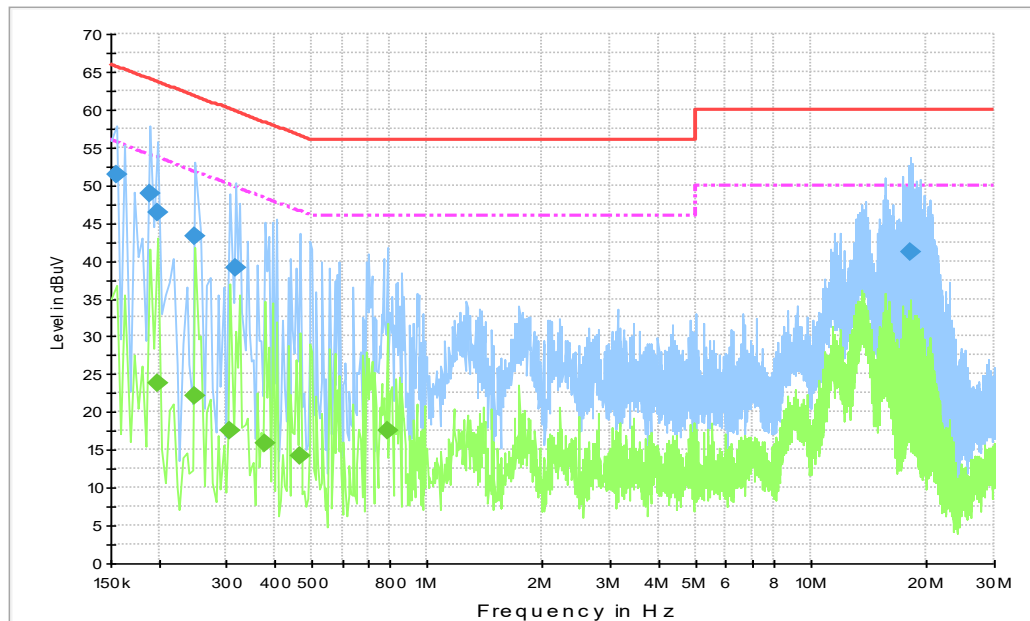

**Fig.B.11.1 AC Powerline Conducted Emission- bluetooth**


Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

### Final Result 1

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.154500	51.5	2000.0	9.000	On	L1	27.7	14.2	65.8
0.190500	48.9	2000.0	9.000	On	L1	21.2	15.1	64.0
0.199500	46.3	2000.0	9.000	On	L1	19.8	17.3	63.6
0.249000	43.3	2000.0	9.000	On	N	19.7	18.5	61.8
0.316500	39.2	2000.0	9.000	On	L1	19.7	20.6	59.8
18.249000	41.1	2000.0	9.000	On	L1	19.9	18.9	60.0

### Final Result 2

Frequency (MHz)	Average (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.199500	23.8	2000.0	9.000	On	L1	19.8	29.8	53.6
0.249000	22.2	2000.0	9.000	On	N	19.7	29.6	51.8
0.307500	17.5	2000.0	9.000	On	N	19.7	32.6	50.0
0.379500	16.0	2000.0	9.000	On	N	19.8	32.3	48.3
0.465000	14.2	2000.0	9.000	On	N	19.8	32.4	46.6
0.789000	17.6	2000.0	9.000	On	N	19.7	28.4	46.0

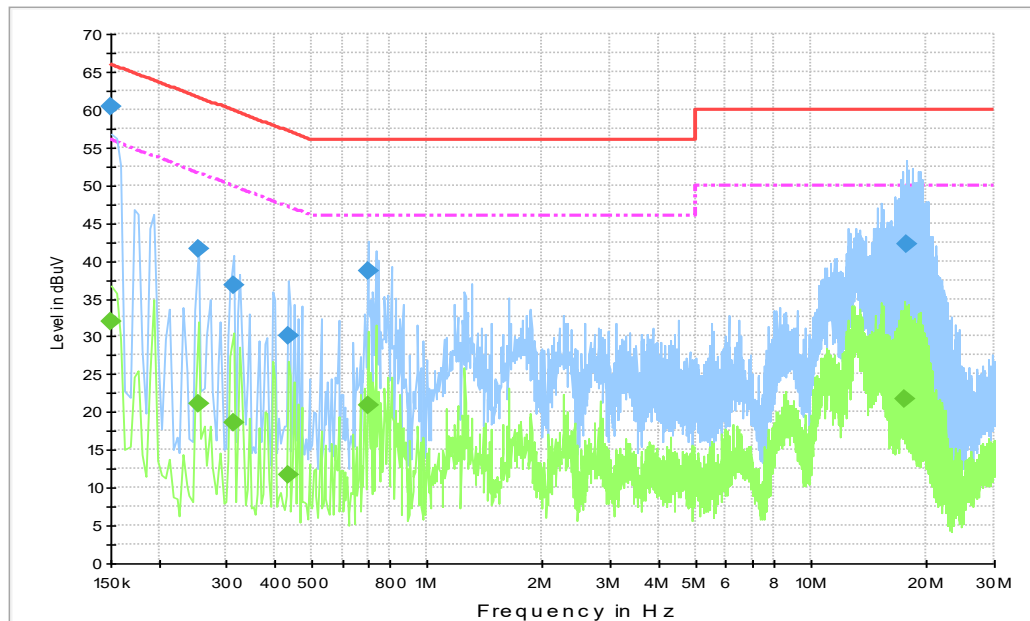

**Fig.B.11.2 AC Powerline Conducted Emission-Idle**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	60.3	2000.0	9.000	On	L1	28.6	5.7	66.0
0.253500	41.5	2000.0	9.000	On	L1	19.7	20.1	61.6
0.312000	36.8	2000.0	9.000	On	L1	19.7	23.1	59.9
0.433500	30.0	2000.0	9.000	On	N	19.8	27.2	57.2
0.699000	38.6	2000.0	9.000	On	N	19.7	17.4	56.0
17.812500	42.3	2000.0	9.000	On	L1	19.9	17.7	60.0

### Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	32.1	2000.0	9.000	On	L1	28.6	23.9	56.0
0.253500	21.1	2000.0	9.000	On	N	19.7	30.5	51.6
0.312000	18.7	2000.0	9.000	On	N	19.7	31.2	49.9
0.433500	11.6	2000.0	9.000	On	L1	19.8	35.6	47.2
0.699000	21.0	2000.0	9.000	On	N	19.7	25.0	46.0
17.565000	21.8	2000.0	9.000	On	L1	19.9	28.2	50.0

## **ANNEX C: Accreditation Certificate**

<p>United States Department of Commerce National Institute of Standards and Technology</p> <div style="display: flex; justify-content: space-around; align-items: center;"><div style="font-size: 4em; font-weight: bold; letter-spacing: 0.5em;">NVLAP<sup>®</sup></div><div style="text-align: center;"> ilac-MRA</div></div> <hr style="border: 1px solid black;"/> <p style="font-size: 1.2em; font-weight: bold;">Certificate of Accreditation to ISO/IEC 17025:2017</p> <hr style="border: 1px solid black;"/>	
<p>NVLAP LAB CODE: 600118-0</p>	
<p><b>Telecommunication Technology Labs, CAICT</b> Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p><b>Electromagnetic Compatibility &amp; Telecommunications</b></p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).</i></p>	
<p>2022-10-01 through 2023-09-30 <i>Effective Dates</i></p>	<div style="display: flex; align-items: center; justify-content: center;"><div style="text-align: center;"> DEPARTMENT OF COMMERCE UNITED STATES OF AMERICA</div><div style="margin-left: 20px;"> _____ <i>For the National Voluntary Laboratory Accreditation Program</i></div></div>

**\*\*\*END OF REPORT\*\*\***